

ROLLER

Gravity Roller Curve Conveyor
(1.9 in. Dia. x 9 Ga. Unplated Rollers)






GRAVITY

OAW	BR	Inside Radius	Rollers Per Curve 90°	Model No. 199SRC Unplated	Weight (Lbs) 90°
16"	13"	32 1/2"	22	199SRC-13-90S	128
18"	15"		22	199SRC-15-90S	144
20"	17"		22	199SRC-17-90S	161
22"	19"		22	199SRC-19-90S	176
24"	21"		22	199SRC-21-90S	193
26"	23"	48"	42	199SRC-23-90D	228
28"	25"		42	199SRC-25-90D	243
30"	27"		42	199SRC-27-90D	259
34"	31"		42	199SRC-31-90D	307
36"	33"		42	199SRC-33-90D	323
40"	37"	48"	42	199SRC-37-90D	356
42"	39"		42	199SRC-39-90D	373

OAW	BR	Inside Radius	Rollers Per Curve 45°	Model No. 199SRC Unplated	Weight (Lbs) 45°
16"	13"	32 1/2"	11	199SRC-13-45S	66
18"	15"		11	199SRC-15-45S	73
20"	17"		11	199SRC-17-45S	82
22"	19"		11	199SRC-19-45S	90
24"	21"		11	199SRC-21-45S	98
26"	23"	48"	22	199SRC-23-45D	117
28"	25"		22	199SRC-25-45D	124
30"	27"		22	199SRC-27-45D	132
34"	31"		22	199SRC-31-45D	159
36"	33"		22	199SRC-33-45D	166
40"	37"	48"	22	199SRC-37-45D	182
42"	39"		22	199SRC-39-45D	190

OAW	BR	Inside Radius	Rollers Per Curve 60°	Model No. 199SRC Unplated	Weight (Lbs) 60°
16"	13"	32 1/2"	14	199SRC-13-60S	85
18"	15"		14	199SRC-15-60S	96
20"	17"		14	199SRC-17-60S	107
22"	19"		14	199SRC-19-60S	117
24"	21"		14	199SRC-21-60S	129
26"	23"	48"	32	199SRC-23-60D	152
28"	25"		32	199SRC-25-60D	162
30"	27"		32	199SRC-27-60D	173
34"	31"		32	199SRC-31-60D	205
36"	33"		32	199SRC-33-60D	215
40"	37"	48"	32	199SRC-37-60D	237
42"	39"		32	199SRC-39-60D	248

OAW	BR	Inside Radius	Rollers Per Curve 30°	Model No. 199SRC Unplated	Weight (Lbs) 30°
16"	13"	32 1/2"	7	199SRC-13-30S	42
18"	15"		7	199SRC-15-30S	48
20"	17"		7	199SRC-17-30S	53
22"	19"		7	199SRC-19-30S	58
24"	21"		7	199SRC-21-30S	64
26"	23"	48"	12	199SRC-23-30D	75
28"	25"		12	199SRC-25-30D	80
30"	27"		12	199SRC-27-30D	86
34"	31"		18	199SRC-31-30D	101
36"	33"		18	199SRC-33-30D	107
40"	37"	48"	18	199SRC-37-30D	118
42"	39"		18	199SRC-39-30D	123

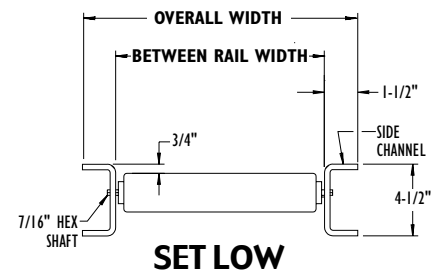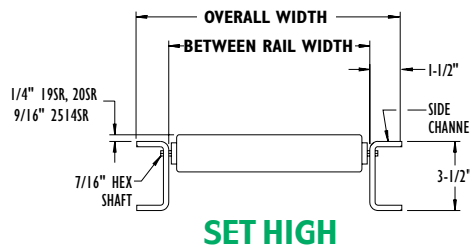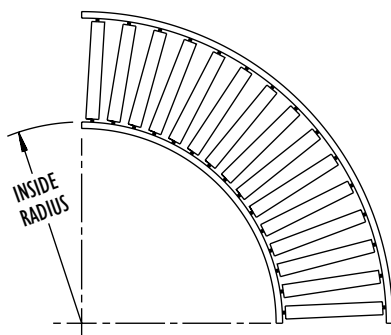

• Standard Specifications

WIDTHS—Between Rail Width: 13 in., 15 in., 17 in., 19 in., 21 in., 23 in., 25 in., 27 in., 31 in., 33 in., 37 in., and 39 in.

FRAME—3-1/2 in. or 4-1/2 in. deep x 1-1/2 in. flange x 10 ga. powder painted formed steel channel with bolt-in cross members.

BUTT COUPLINGS—Bolt-on type for bolting sections together.

CURVES— 30°, 45°, 60° and 90° with 32-1/2 in. inside radius for widths up to 27 in., 48 in. inside radius for 31 in. to 39 in. between rail widths.

ROLLERS—(Straight) "199SRC" 1.9 in. dia. x 9 ga. unplated steel tubing. Bearings are labyrinth sealed and grease packed.

AXLES—7/16 in. hex shaft, spring loaded.

CAPACITY— Same per foot capacity as straight sections. See charts previous page.

