

ROLLER

Gravity Roller Curve Conveyor
(1.9 in. Dia. Tapered Unplated Rollers)





OAW	BR	Inside Radius	Rollers Per Curve 90°	Model No. 19SRCT Unplated	Weight (Lbs) 90°
16"	13"	32 1/2"	20	19SRCT-13-90	103
18"	15"		20	19SRCT-15-90	112
20"	17"		20	19SRCT-17-90	119
22"	19"		20	19SRCT-19-90	133
24"	21"		20	19SRCT-21-90	145
26"	23"		20	19SRCT-23-90	152
28"	25"		20	19SRCT-25-90	167
30"	27"		20	19SRCT-27-90	173
34"	31"	48"	32	19SRCT-31-90	305
36"	33"		32	19SRCT-33-90	315
40"	37"		32	19SRCT-37-90	345
42"	39"		32	19SRCT-39-90	355


OAW	BR	Inside Radius	Rollers Per Curve 45°	Model No. 19SRCT Unplated	Weight (Lbs) 45°
16"	13"	32 1/2"	10	19SRCT-13-45	51
18"	15"		10	19SRCT-15-45	55
20"	17"		10	19SRCT-17-45	62
22"	19"		10	19SRCT-19-45	68
24"	21"		10	19SRCT-21-45	71
26"	23"		10	19SRCT-23-45	76
28"	25"		10	19SRCT-25-45	81
30"	27"		10	19SRCT-27-45	86
34"	31"	48"	16	19SRCT-31-45	148
36"	33"		16	19SRCT-33-45	156
40"	37"		16	19SRCT-37-45	172
42"	39"		16	19SRCT-39-45	181

OAW	BR	Inside Radius	Rollers Per Curve 60°	Model No. 19SRCT Unplated	Weight (Lbs) 60°
16"	13"	32 1/2"	14	19SRCT-13-60	69
18"	15"		14	19SRCT-15-60	75
20"	17"		14	19SRCT-17-60	79
22"	19"		14	19SRCT-19-60	89
24"	21"		14	19SRCT-21-60	97
26"	23"		14	19SRCT-23-60	101
28"	25"		14	19SRCT-25-60	111
30"	27"		14	19SRCT-27-60	115
34"	31"	48"	21	19SRCT-31-60	203
36"	33"		21	19SRCT-33-60	210
40"	37"		21	19SRCT-37-60	230
42"	39"		21	19SRCT-39-60	236

OAW	BR	Inside Radius	Rollers Per Curve 30°	Model No. 19SRCT Unplated	Weight (Lbs) 30°
16"	13"	32 1/2"	7	19SRCT-13-30	34
18"	15"		7	19SRCT-15-30	37
20"	17"		7	19SRCT-17-30	40
22"	19"		7	19SRCT-19-30	44
24"	21"		7	19SRCT-21-30	48
26"	23"		7	19SRCT-23-30	51
28"	25"		7	19SRCT-25-30	56
30"	27"		7	19SRCT-27-30	58
34"	31"	48"	10	19SRCT-31-30	102
36"	33"		10	19SRCT-33-30	105
40"	37"		10	19SRCT-37-30	115
42"	39"		10	19SRCT-39-30	118

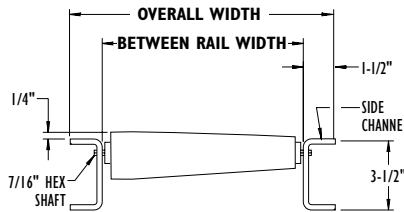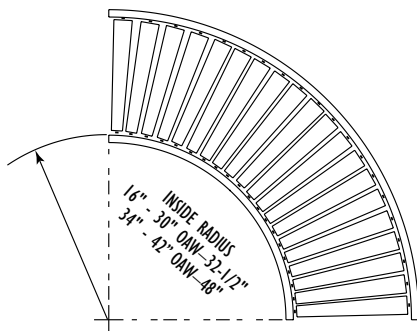

SET HIGH

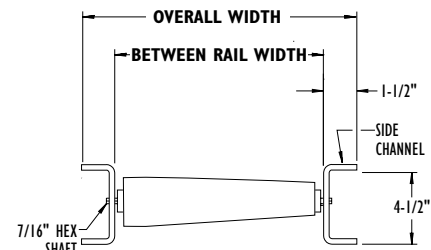

SET LOW

• Standard Specifications

WIDTHS—Between Rail Width: 13 in., 15 in., 17 in., 19 in., 21 in., 23 in., 25 in., 27 in., 31 in., 33 in., 37 in., and 39 in.

FRAME—3-1/2 in. or 4-1/2 in. deep x 1-1/2 in. flange x 10 ga. powder painted formed steel channel with bolt-in cross members.

BUTT COUPLINGS—Bolt-on type for bolting sections together.

CURVES—30°, 45°, 60° and 90° with 32-1/2 in. inside radius for widths up to 27 in., 48 in. inside radius for 31 in. to 39 in. between rail widths.

ROLLERS—(Tapered) “19-SRCT” 2-1/2 in. dia. tapered to 1-11/16 in. dia. x 16 ga. unplated steel tubing. Bearings are grease packed.

AXLES—7/16 in. hex shaft, spring loaded.

CAPACITY—Same per foot capacity as straight sections. See charts previous page.

