


Floor/Lift Truck/Pallet/Belt Scales

Floor Scale and Indicator Package



Package is configured, corner-trimmed, and calibrated for 5,000 divisions before shipping

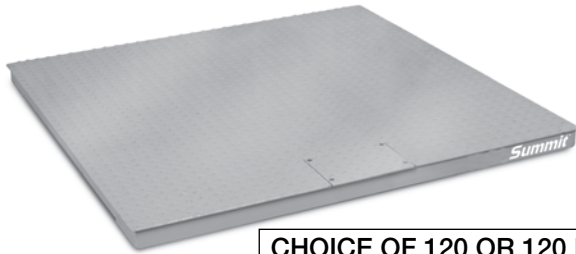

FLOOR SCALE APPROVALS



INDICATOR APPROVALS



* 120 Plus - Approvals pending for Measurement Canada

SPECIFICATIONS

SUMMIT 3000 FLOOR SCALE

APPROVALS:

NTEP Certified, CC# 92-001A9;
Measurement Canada approved, AM-5530

END LOAD CAPACITY

100% full scale at 5000lb (2500kg)
80% full scale at 10,000lb (5000kg)

CABLE LENGTH:

20ft (6.1m) (for connecting j-box to indicator)

WARRANTY:

Two-year limited warranty

120/120 PLUS DIGITAL WEIGHT INDICATOR

OPERATING TEMPERATURE:

-10°C to 40°C/14°F to 104°F (legal)
-10°C to 50°C/14°F to 122°F (industrial)

RATING/MATERIAL:

Enclosure: heavy gauge ABS

120 APPROVALS:

NTEP Certified 6,000 Divisions, Class III/IIIL,
CC# 03-059; Measurement Canada approved, AM-5517,
Class III/IIILD at 6,000 Divisions; TC7072; T 5692 at 5,000 Divisions;
CE marked

120 PLUS APPROVALS:

NTEP Certified 6,000 Divisions, Class III/IIIL, CC# 03-059; Measurement
Canada Pending, OIML approved, TC 7335; T7334 at 10,000 Divisions

WARRANTY:

1-year limited warranty

STANDARD FEATURES

Summit™ 3000 Floor Scale

- Four NTEP Certified alloy steel shear beam load cells
- Top access junction box
- Rugged diamond safety treadplate steel deck
- Four adjustable rigid polyurethane rubber feet, 3in (76.2mm) diameter
- Signal trim summing board housed in ABS enclosure
- Threaded eyebolt hole (1/2-13NC) located in the center of the deck for easy lifting
- 20ft of EL147 load cell cable with quick disconnect
- Package configured and calibrated for 5,000 divisions

120 Digital Weight Indicator

- Large .8in (20.3mm) Light Emitting Diode (LED) display
- Five-button operation
- Full front panel digital calibration and configuration

120 PLUS Digital Weight Indicator

- Large .8in backlit Liquid Crystal Display (LCD)
- 115 or 230VAC wall adaptor with rechargeable battery

FLOOR SCALE AND INDICATOR PACKAGE

Package includes DIGI® Summit® 3000 floor scale, 120 PLUS digital weight indicator with tilt stand, 20ft load cell cable with quick disconnect, configured and calibrated

| PART # | SIZE (W x L x H) | CAPACITY | EST. SHIP WEIGHT |
|--|-----------------------------|-----------------------|------------------|
| 115VAC (120) | | | |
| 78772..... | 4 ft x 4 ft x 3.625 in..... | 5,000 lb x 1 lb..... | 315 lb |
| 78773..... | 4 ft x 4 ft x 3.625 in..... | 10,000 lb x 2 lb..... | 315 lb |
| 115VAC (120 Plus) | | | |
| 106913..... | 4 ft x 4 ft x 3.625 in..... | 5,000 lb x 1 lb..... | 315 lb |
| 106914..... | 4 ft x 4 ft x 3.625 in..... | 10,000 lb x 2 lb..... | 315 lb |
| 230VAC (120) | | | |
| 78780..... | 4 ft x 4 ft x 3.625 in..... | 5,000 lb x 1 lb..... | 315 lb |
| 78781..... | 4 ft x 4 ft x 3.625 in..... | 10,000 lb x 2 lb..... | 315 lb |
| 230VAC (120 Plus) | | | |
| 106915..... | 4 ft x 4 ft x 3.625 in..... | 5,000 lb x 1 lb..... | 315 lb |
| 106916..... | 4 ft x 4 ft x 3.625 in..... | 10,000 lb x 2 lb..... | 315 lb |
| 115VAC Canadian Weights and Measures (120) | | | |
| 78776..... | 4 ft x 4 ft x 3.625 in..... | 2,500 kg x 0.5kg..... | 315 lb |
| 78777..... | 4 ft x 4 ft x 3.625 in..... | 5,000 kg x 1 kg..... | 315 lb |
| 115VAC Canadian Weights and Measures (120 Plus) | | | |
| 106917..... | 4 ft x 4 ft x 3.625 in..... | 2,500 kg x 0.5kg..... | 315 lb |
| 106918..... | 4 ft x 4 ft x 3.625 in..... | 5,000 kg x 1 kg..... | 315 lb |

OPTIONS/ACCESSORIES

Summit 3000 Floor Scale

- 75819..... Floor anchor plates, mild steel (set of two)
- 76012..... Additional operating manual

120 Digital Weight Indicator

- 77925..... Revolution® III Scale Software*
- 78611..... Additional power supply, 115VAC
- 78613..... Additional operating manual

* Revolution® III can be downloaded for free from the distributor section of our Web site at www.ricelake.com