


PALLET TRUCK
FREEZER SPECIAL
APPLICATIONS



FREEZER PUMP UNIT

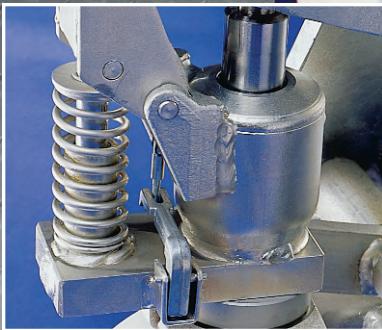

HOT DIPPED GALVANIZED FRAME



SOLID NYLON WHEELS
AND ROLLERS




STAINLESS STEEL COMPONENTS



LIFT-RITE®

FEATURES OF THE FREEZER SPECIAL HAND PALLET TRUCKS

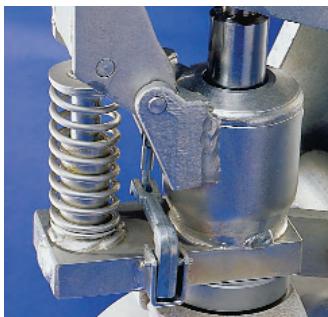


Freezer Pump Unit

External components are Cadmium plated to protect from condensation and Low temperature hydraulic fluid prevents freezing.



Hot Dipped Galvanized Frame

Galvanizing process gives durable corrosion protection that stands up to the constant abrasion of pallet entry and exit.

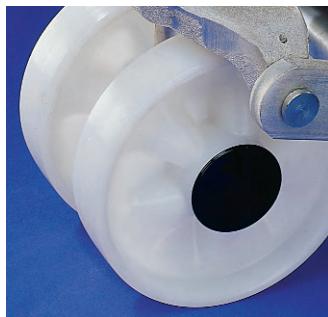

Nylon Wheels and Rollers with shielded ball bearings

Solid nylon provides a durable rolling surface that will not wear prematurely in applications with extreme temperature changes.




Stainless Steel Components

The pump pistons and fork pins are critical components that require the full corrosion resistance of high quality Stainless Steel.

Freezer Special – Model L55F – 3" Fork lowered height

MODEL NO.	CAPACITY (LBS.)	FRAME WIDTH (A) (IN.)	FORK LENGTH (L) (IN.)	FORK WIDTH (IN.)	WEIGHT (LBS.)
L55F-A36	5,500	27	36	7	149
L55F-A42	5,500	27	42	7	158
L55F-A48	5,500	27	48	7	167
L55F-B36	5,500	20.5	36	7	141
L55F-B42	5,500	20.5	42	7	150
L55F-B48	5,500	20.5	48	7	159

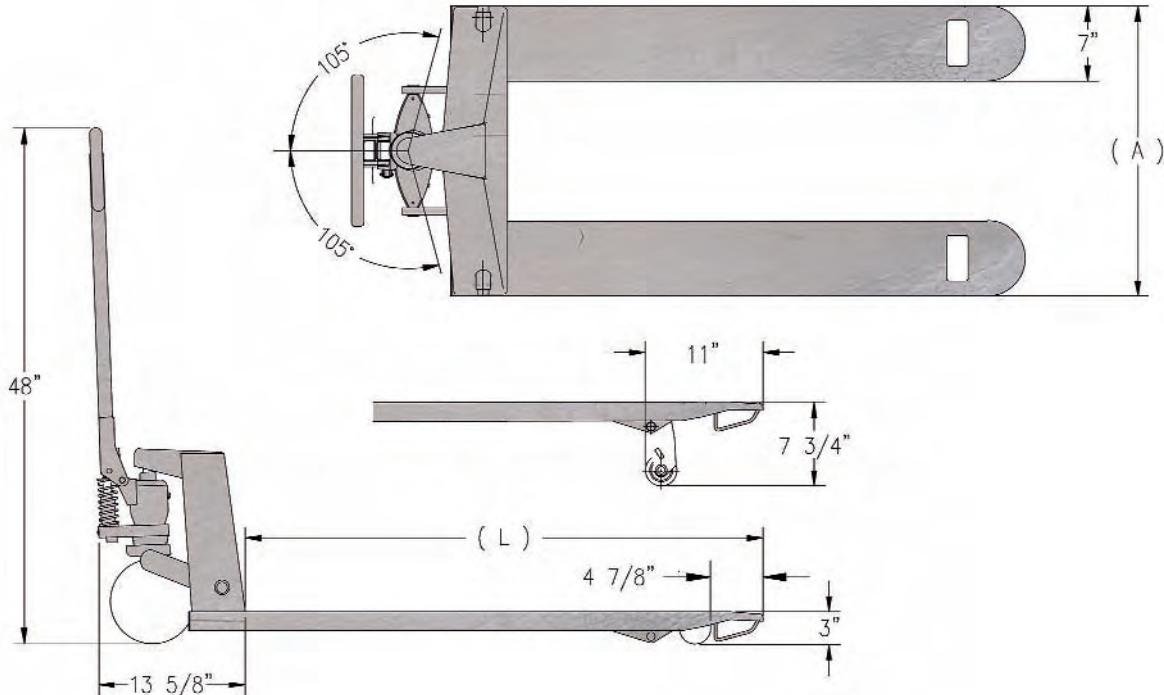

Other Lift-Rite model Hand pallet trucks available (Refer to Applications brochures for Specifications)

Standard Series – Model LR2055 – 3" Fork lowered height

Low / Ultralow Profile Series – Models L50M / L50MU – 2" / 1-3/4" Fork lowered height

Four Way Series – Models L50M-4WAY / L50MU-4WAY – Four way pallet entry trucks

Please contact your Authorized LIFT-RITE Dealer for special fork widths and lengths.

LIFT-RITE®

Due to LIFT-RITE'S continuing product development program, specifications are subject to change without notice.
Contact your Authorized LIFT-RITE Dealer to confirm the most recent specifications.