

BALDOR® • **RELIANCE**

Product Information Packet


L3408

.5HP,3450RPM,1PH,60HZ,48,3413L,TEFC,F1

Part Detail							
Revision:	L	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3413L	Elec. Spec:	34WGX716	CD Diagram:	CD0001
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	34H640	Layout:	34LYH640
Frame:	48	Mounting:	F1	Poles:	02	Created Date:	
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	12-14-2011
Leads:	6#18					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1256L							
CAT.NO.	L3408						
SPEC.	34H640X716						
HP	.5						
VOLTS	115/230						
AMP	7/3.5						
RPM	3450						
FRAME	48	HZ	60	PH	1		
SER.F.	1.25	CODE	L	DES	N	CLASS	B
NEMA-NOM-EFF	66	PF	72				
RATING	40C AMB-CONT						
CC		USABLE AT 208V	4.1				
DE	6203	ODE	6203				
ENCL	TEFC	SN					
	SFA 8/4						

No performance data has been
assigned to this product.

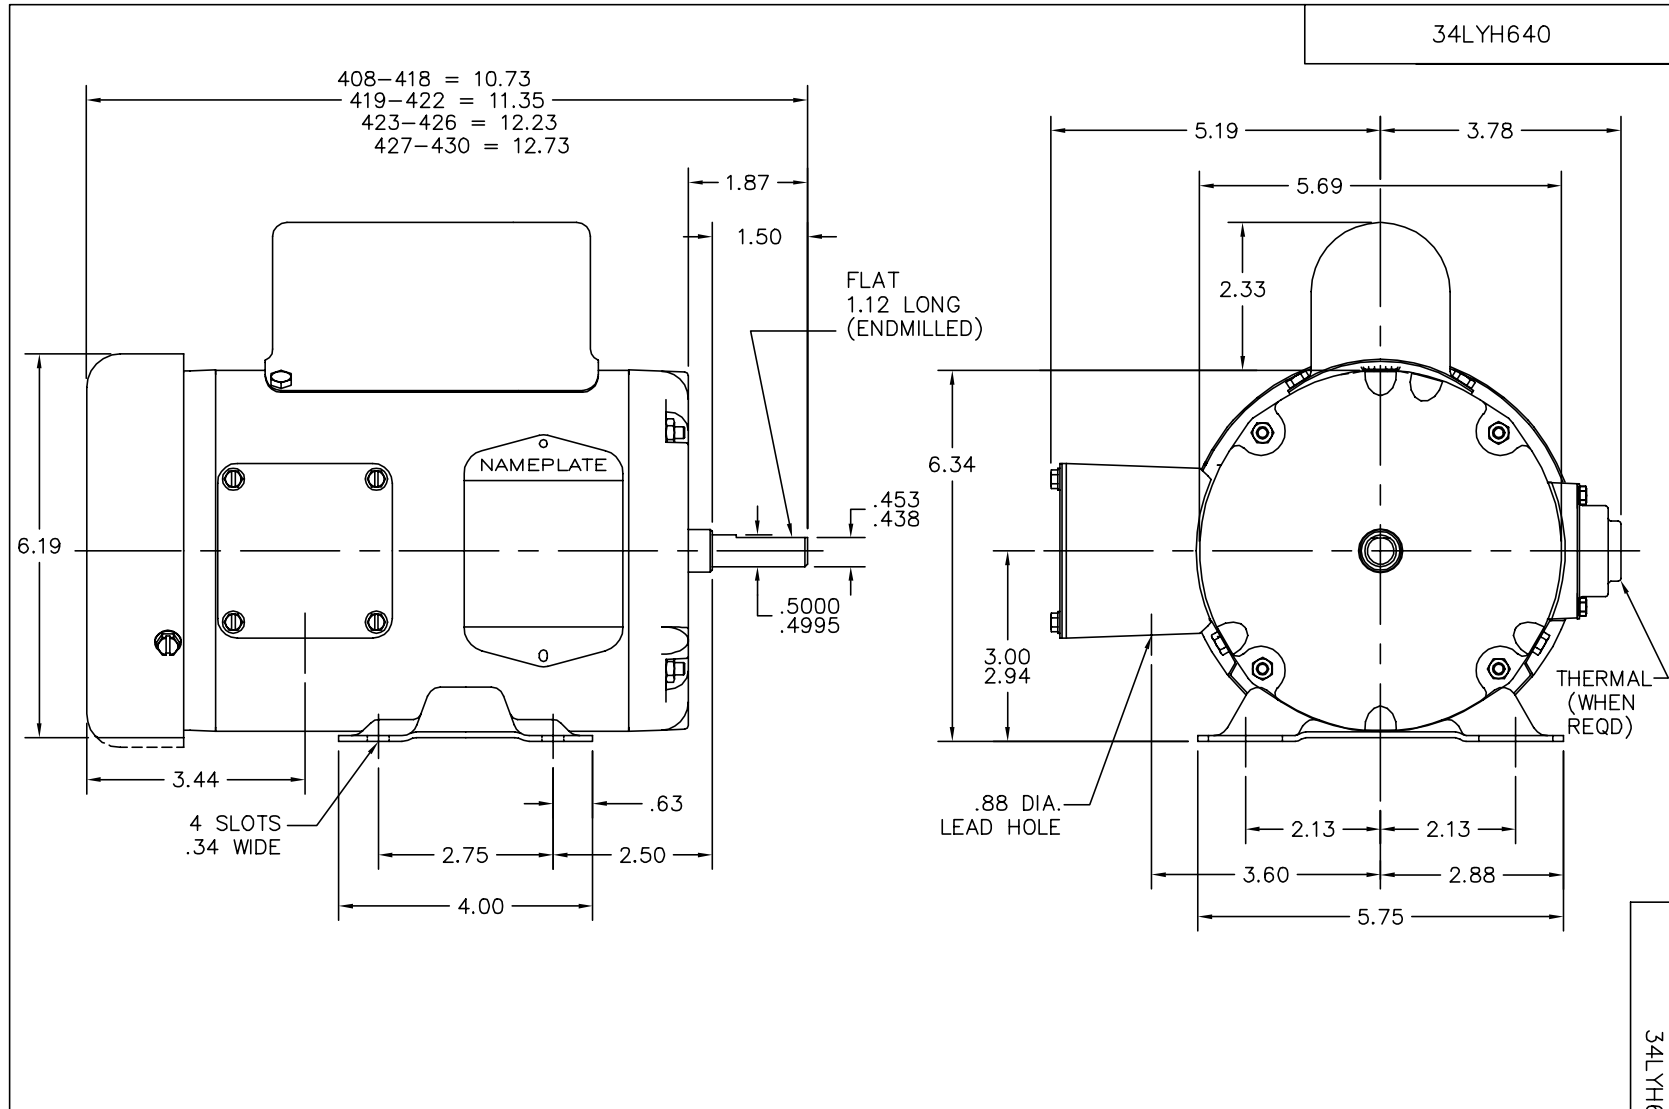

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.


REV. DESC: UPDATE DESCRIPTION		
REV. LTR: C	VERSION: 02	TDR: 000000725714
FILE: \AAA\00064\447		REVISED: 01:17:12 12/15/2011
MTL: -		BY: ENVINWO

BALDOR

STD HORZ 34L NEMA 48 TEFC W/33 CAPAC BOX AND 3 PH ER

SH 1 of 1

CD0001

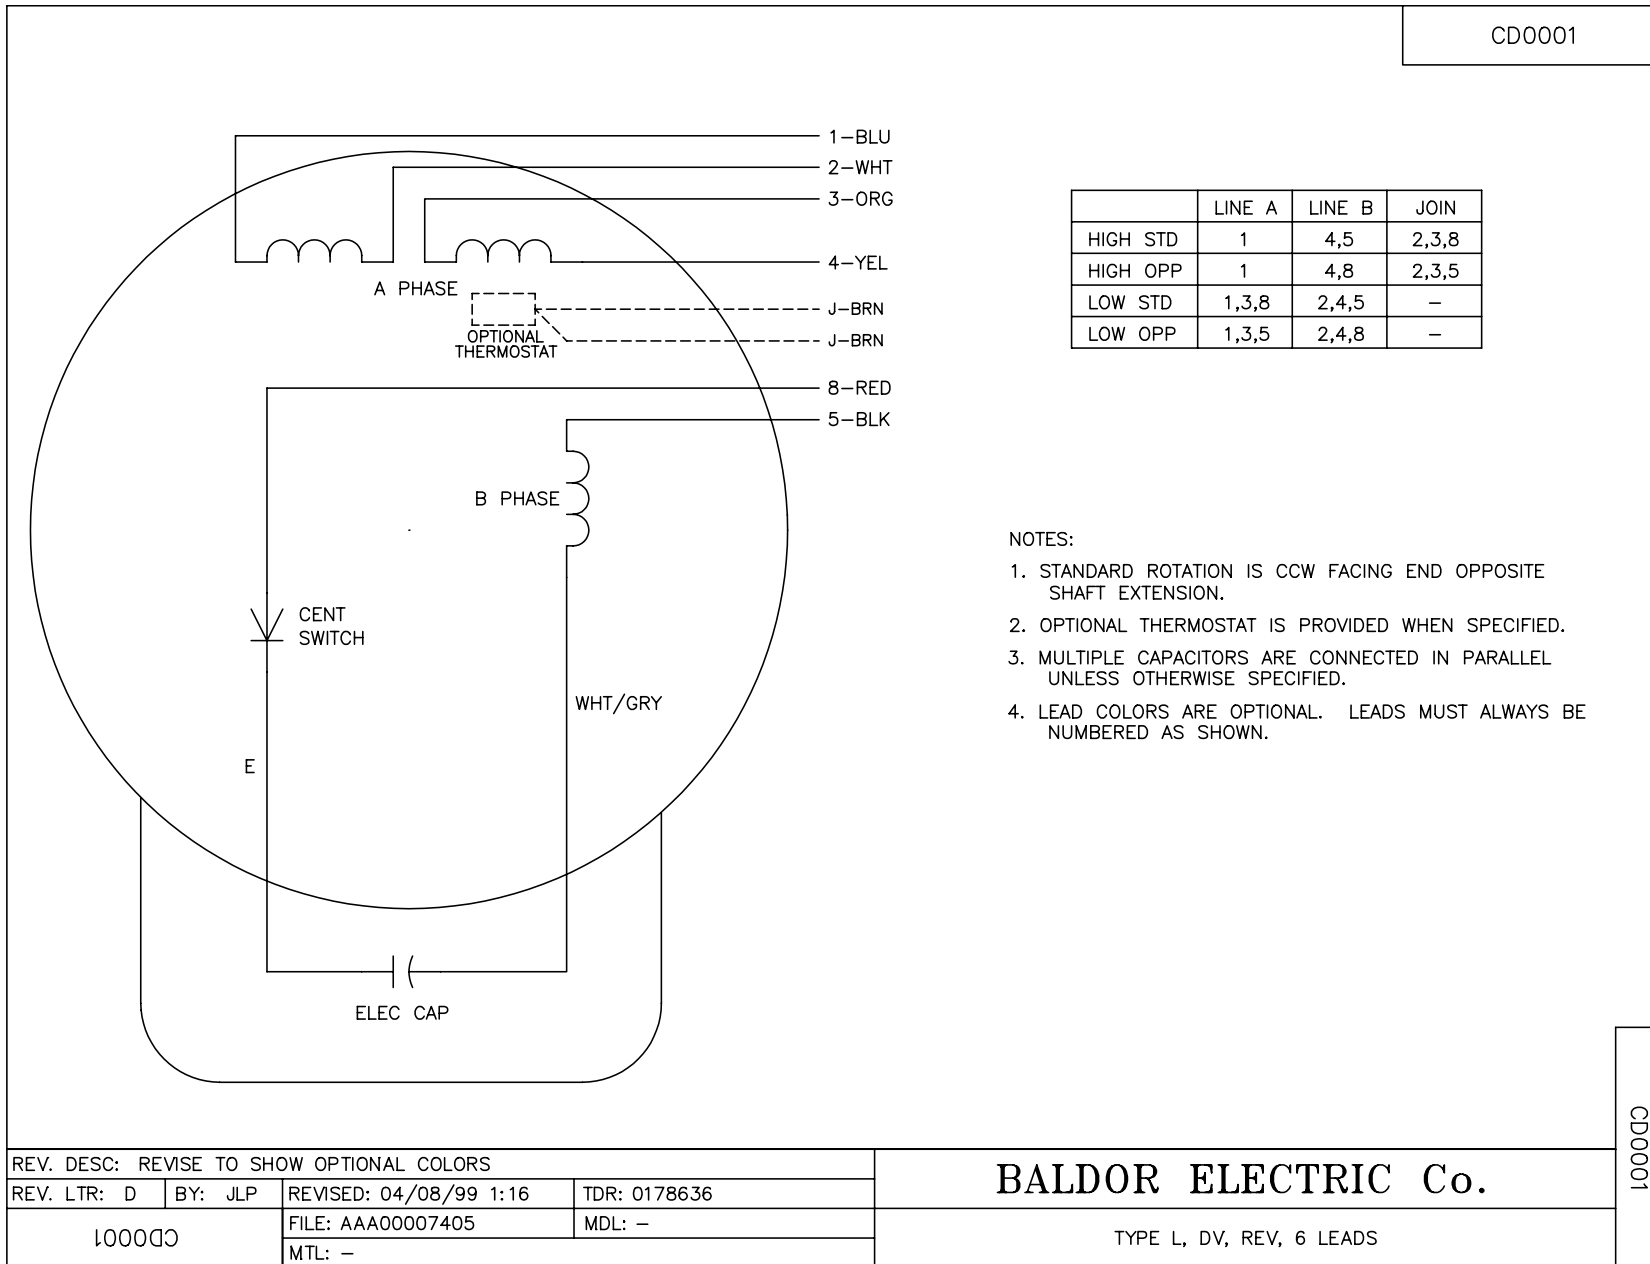

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:16	TDR: 0178636
100000		FILE: AAA00007405	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

TYPE L, DV, REV, 6 LEADS

CD0001