

UV Resistant

MAKROLON[®] SL Sheet is a polycarbonate product with exceptional weatherability. It is easy to thermoform, fabricate and decorate and is offered with a ten (10) year warranty, on clear only, against breakage, yellowing and loss of light transmission. The terms of the warranty against breakage are set forth in the Makrolon SL warranty, which is available upon request.



Applications

Covered walkways, barrel vaults, upper story school glazing, bus shelters and thermoformed skylights,

Typical Properties			
Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D792	-	1.2
Refractive Index	ASTM D542	-	1.586
Light Transmission, Clear @ 0.125"	ASTM D1003	%	86
Light Transmission, Gray, Bronze	ASTM D1003	%	50
Light Transmission, Dark Gray	ASTM D1003	%	18
Water Absorption, 24 hrs	ASTM D570	%	0.15
Poisson's Ratio	ASTM E132	-	0.38
MECHANICAL			
Tensile Strength, Ultimate	ASTM D638	psi	9,500
Tensile Strength, Yield	ASTM D638	psi	9,000
Tensile Modulus	ASTM D638	psi	340,000
Elongation	ASTM D638	%	110
Flexural Strength	ASTM D790	psi	13,500
Flexural Modulus	ASTM D790	psi	345,000
Compressive Strength	ASTM D695	psi	12,500
Compressive Modulus	ASTM D695	psi	345,000
Izod Impact Strength, Notched @ 0.125"	ASTM D256	ft-lbs/in	18
Izod Impact Strength, Unnotched @ 0.125"	ASTM D256	ft-lbs/in	60 (no failure)
Instrumented Impact, 0.125"	ASTM D3763	ft-lbs	>45
Shear Strength @ Yield	ASTM D732	psi	6,000
Shear Strength, Ultimate	ASTM D732	psi	10,000
Shear Modulus	ASTM D732	psi	114,000
Rockwell Hardness	ASTM D785	-	M70/R118
THERMAL			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x 10 ⁻⁵
Coefficient of Thermal Conductivity	ASTM C177	BTU·in/hr·ft ² ·°F	1.35
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D648	°F	280
Brittleness Temperature	ASTM D746	°F	-200
Shading Coefficient, Clear 0.125"	ASHRAE	-	1.02
Shading Coefficient, Gray, Bronze 0.125"	ASHRAE	-	0.70
U factor 0.25" (summer gain, winter loss)	ASTM D1363	BTU/hr·ft ² ·°F	0.90, 0.96
ELECTRICAL			
Dielectric Constant, @10Hz	ASTM D150	-	2.96
Dielectric Constant @ 60Hz	ASTM D150	-	3.17
Volume Resistivity	ASTM D257	Ohm·cm	8.2 x 10 ¹⁶
Dissipation Factor @ 60 Hz	ASTM D150	-	0.0009
Arc Resistance	-	-	-
Stainless Steel Strip electrode	ASTM D495	Seconds	10-11
Tungsten Electrodes	ASTM D495	Seconds	120
Dielectric Strength, in air @ 0.125"	ASTM D149	V/mil	380
FLAMMABILITY			
Horizontal Burn, AEB	ASTM D635	in	<1
Ignition Temperature, Self	ASTM D1929	°F	1070
Ignition Temperature, Flash	ASTM D1929	°F	870
Flame Class, Clear @ 0.094"	UL 94	-	V2
Flame Class, Clear @ 0.236"	UL 94	-	V0

Product Data

MAKROLON[®] SL Sheet

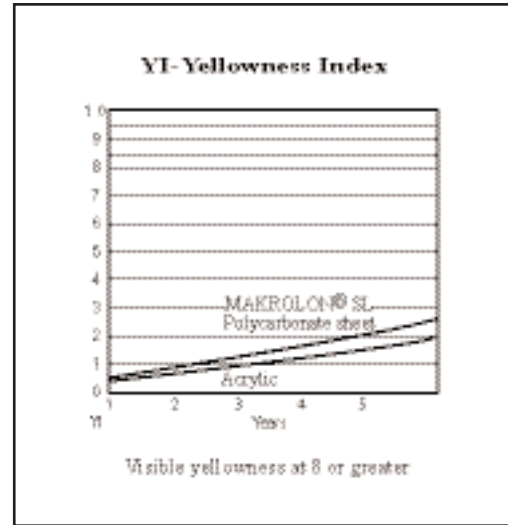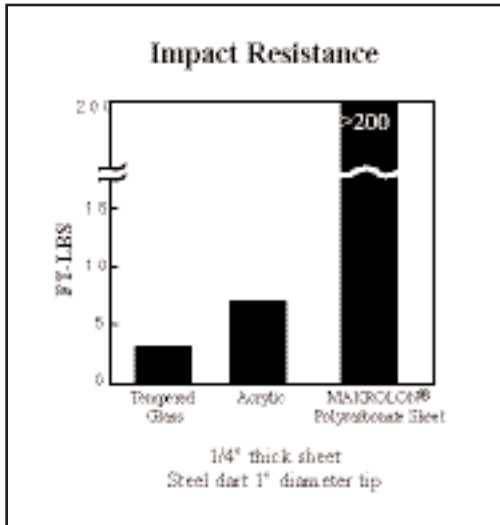

Regulatory Code Compliance and Certifications

IBC 2606.4, Class CC1: gauges 60 - 500 mils

Florida Building Code 2004, Category: Shutters, Sub-category: Storm Panels and Category: Sky Lights, Sub-category: Skylight

CPSC 16 CFR 1201 Category I and Category II: Safety Standard for Architectural Glazing Materials

ANSI Z97.1-1984: American National Standard for Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test

UL 972: Burglary Resistant Glazing Materials, UL File #BP2126

UL 48 Standard for Component Sign Accessories in Rigid Sign Face Systems, UL File #E146154

UL 94 Flammability file #E71069

Disclaimer

The manner in which you use and the purpose to which you put and utilize our products, technical assistance, and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance, and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.

Sheffield Plastics
A Bayer MaterialScience LLC Business

119 Salisbury Road
Sheffield, MA 01257
800-254-1707
Fax: 800-457-3553
Web site: www.sheffieldplastics.com
E-mail: info@sheffieldplastics.com

©Copyright, Sheffield Plastics Inc., 2008 Printed in USA
MAKROLON[®] is a registered trademark of Bayer AG.



MAKSL 0209