

LedgeGuard Elevated Access Protection



Protects elevated access points for material loading and unloading. Easy-to-use, easy-to- install. Protects without affecting productivity. Two-gate system means one gate is always closed and OSHA compliant fall protection is in place. Elevated loading areas such as mezzanines must have access from below for forklifts and at landing height. Create a safe zone for employees without sacrificing productivity with LedgeGuard safety gate. With unique dual gate system, when the inner gate closes the outer gate opens allowing access from below. Once pallet has been placed in the loading zone, the inner gate can be opened, automatically closing outer gate to allow safe access to pallet.

- Prevents falls from elevated access loading points while transferring material loads.
- Meets OSHA 1910.23(c)
- Counteracting gates & rail sections create a safe zone for loading/unloading areas
- When inside gate is opened, outside gate automatically closes.




LedgeGuard Elevated Access Protection



Optional Ground Pole

The ground pole allows forklift operator from ground level to open outside gate.

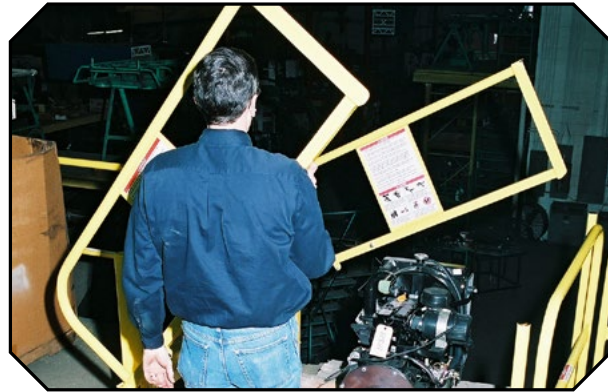

Operator Opens Inner Gate
Outer gate automatically closes.



Toe Boards

Protection from debris being kicked.

SPECIFICATIONS

Railing Height: 42"

Safe Zone Depth: 5 ft. to keep operator back from unloading process.

Opening Width: Standard = 57" Please provide your opening length for a custom fitted system.

Gates: 70" and wider require additional damper.

Meets OSHA 1910.23(c)

FULL PRODUCT LINE



Distributed By:



2601 Niagara Lane North Plymouth, MN 55447
(877) 791-4446 | P: (763) 694-2624 | F: (800) 820-3268
www.garlocksafety.com