


RailGuard 200 Non-Penetrating Safety Guardrail System



RailGuard is the original non-penetrating rail system that exceeds requirements for OSHA temporary and permanent guard-rail standards. It is ideal for creating leading edge rooftop fall prevention or for defining material landing zones during active work on the jobsite. The modular design comes in lengths from 2 to 13.5-feet in basic kits that include (1) rail, (1) base and (1) pin. Individual components can be added for custom safety guardrail applications. RailGuard can be mounted permanently both internally and externally with these features:

- 16 gauge welded steel rail and powder coated for durability
- Standard yellow or in a variety of colors
- 90 pound four socket cast bases for flexibility and ease of installation
- Meets OSHA 1910.23(c)
- Choice of Base Transporter options to ease transportation and storage
- Built-in toe board pockets and carrying handles
- Allows 90 or 45 degree turns

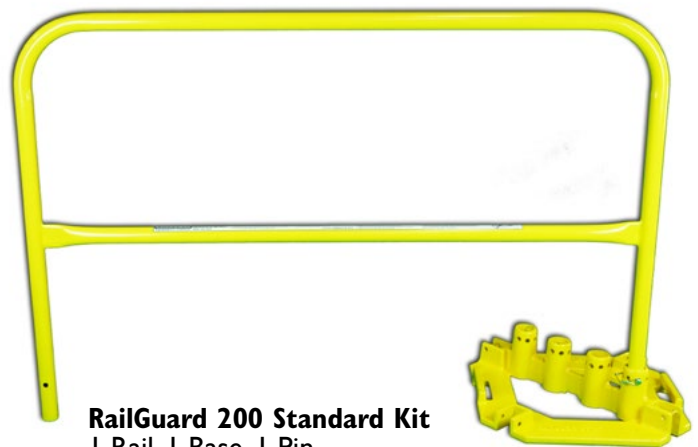

RailGuard 200 Standard Kit
1 Rail, 1 Base, 1 Pin



Base-without pads
Mount up to four rails

Base-with pads
Mount up to four rails. Pads protect the work surface

RailGuard 200

Non-Penetrating Safety Guardrail System



Adjustable Toe Boards



Base Transporter



Centurion Cart



Goliath Mega Cart



Goliath Base Storage



Goliath Winch

SPECIFICATIONS

Base Plate

Mounts up to four rail sections
Allows 90° or 45° turns
Narrow 3-1/4" space between rails
90 lbs.

Rail Sections

42" tall
Three standard lengths: 10', 7' 6", 5'
Custom sizes available

Available in seven different colors.



Meets OSHA 1910.23(c)

FULL PRODUCT LINE



Distributed By:



PLYMOUTH INDUSTRIES INC.
2601 Niagara Lane North Plymouth, MN 55447
(877) 791-4446 | P: (763) 694-2624 | F: (800) 820-3268
www.garlocksafety.com

