


Rollback Safety Bay Gate

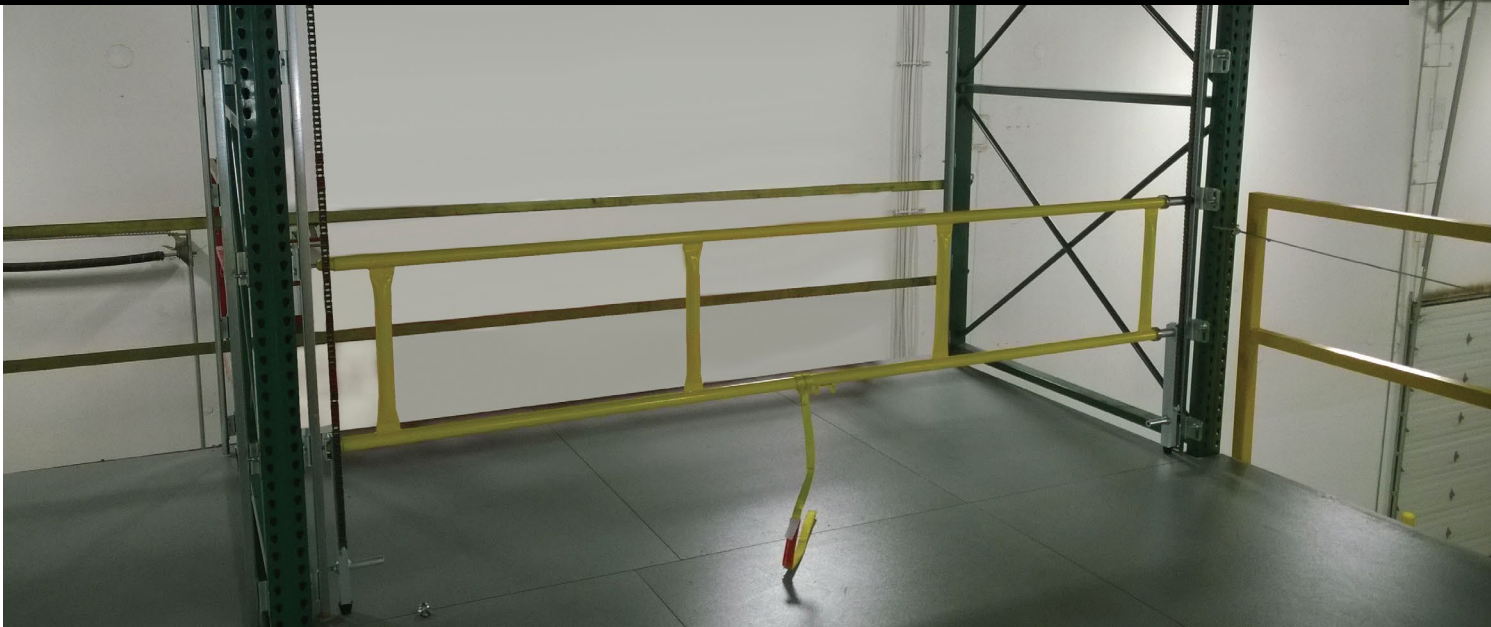

RollBack Safety Bay Gate


Designed to fit standard and custom racking systems and protect elevated access points for material loading and unloading. Easy-to-use and install. Protects without affecting productivity. Two-gate system means one gate is always closed and OSHA compliant fall protection is in place.

- Prevents falls from elevated access loading points while transferring material loads.
- Meets OSHA 1910.23(c) and ANSI 6.4.3
- Counteracting gates create a safe zone for loading/unloading areas
- When inside gate is opened, outside gate automatically closes.




ROLLBACK SAFETY BAY GATE


OPERATION IS AS EASY AS 1-2-3

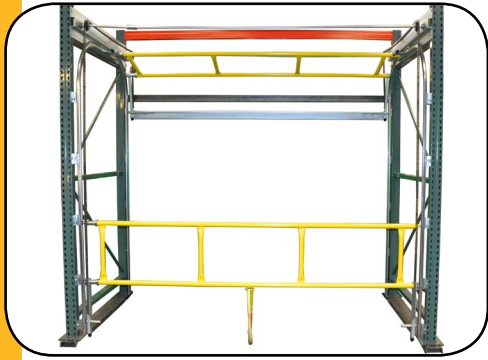


1. Gate closed on receiving side. Gate open on fork truck side. Place pallet into receiving area.

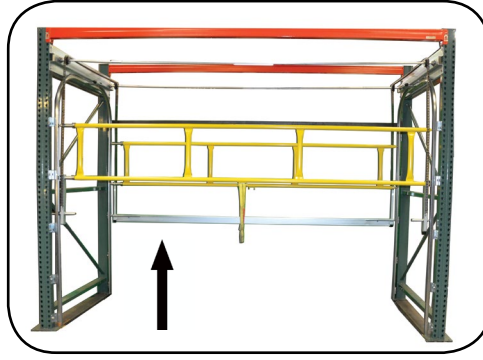


2. As receiving gate is opened, leading edge (fork truck) gate automatically closes.

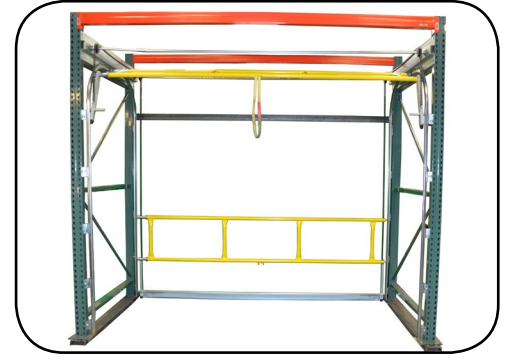


3. As receiving gate fully opens, leading edge gate is fully closed maintaining fall compliance.

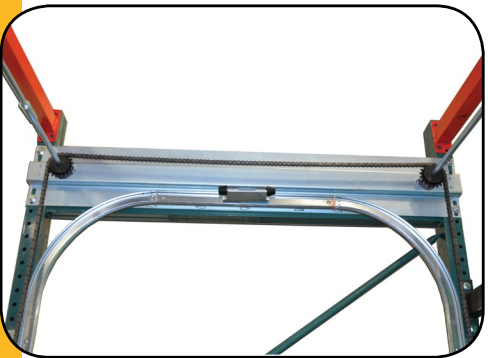

Zinc plated tracks and hardware

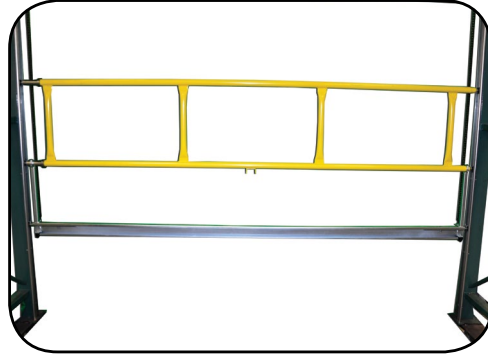

Integrated Toe-board on leading edge gate.

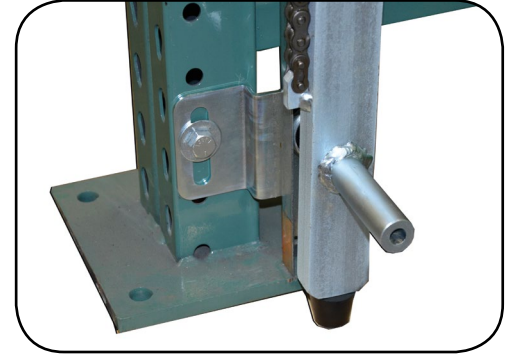

HD Rubber gate stops.

SPECIFICATIONS

Description	H	W	D
	106"	72"	60"
	106"	126"	60"
	106"	60"	60"

*Due to continuous improvement, specifications are subject to change without notice.

- Tracks and hardware zinc plated.
- Gates are Powdercoated Yellow.
- Top Rail Height = 42"
- Lower Rail Height = 20"
- Custom Sizes Also Available.

FULL PRODUCT LINE



Meets OSHA 1910.23(C) and ANSI 6.4.3

Distributed By:



2601 Niagara Lane North Plymouth, MN 55447
 (877) 791-4446 | P: (763) 694-2624 | F: (800) 820-3268
www.garlocksafety.com