

Lista Workbench Components



At the Genesee County Road Commission in Flint, MI, Lista workstations provide an ergonomic, fully-featured workspace for office employees. Narrow Width cabinet pedestals allow lockable, highly-organized storage for a variety of items including files. Overhead cabinets on specially-designed stationary riser shelves provide storage for manuals, books and software that used to clutter workers' desktops.

Lista Workbench Components

Building a Custom Configuration	28
How to Order Custom Configurations	30
Worksurfaces	31
Below-the-Worksurface Accessories	32
Legs	32
Hanging Drawers	34
ESD Accessories	35
Above-the-Worksurface Accessories	36
Shelves	36



Lista workbenches can be custom-configured in a variety of heights and lengths. Benches can be ordered at ergonomically correct standard work height, or at desk or counter heights.

We offer workbench components for industrial, assembly, technical/laboratory, and many other settings, allowing the exact customization needed for each application.

Our workbenches can be teamed with either Narrow Width (16 7/8" wide) or MP Width (22 3/16" wide) storage cabinets for use as pedestals. (For additional cabinet sizes, see our General Storage Catalog.) This provides complete organization of tools, components or instrumentation, right at the point of use.





Rugged stationary and adjustable riser shelves provide above-work-surface storage for items that require easy, ready access.



Instrument riser shelves can be equipped with electrical kits for convenient access to power.



The Nexus™ System provides a wide variety of storage and work accessories above the worksurface.

Lista's wide array of accessory options, above and below the worksurface, allows for an almost infinite number of configurations. Using standard components, your workbench system can be completely customized, without the custom cost, to suit your current and changing needs.



Workbench worksurfaces are available in rugged, durable butcher block (top) or chemical-resistant phenolic resin (bottom).



Easy-to-maintain plastic laminate worksurfaces (top) are also available with static dissipative properties (bottom).



Additional worksurfaces include the practical Lista Top (top), and tops of either galvanized steel over wood or stainless steel over wood (bottom).



Lista's variety of workbench legs includes the heavy-duty Lista leg (shown with bottom shelf).



Technical legs are sturdy and attractive (shown with stringer).



Align™ adjustable height bases allow easy adjustment of worksurface height.



Our Narrow Width (left) and MP Width (right) cabinets give you a choice of pedestal options for your workbench system.



Partial- or full-height doors can be added to cabinet housings to provide bulk shelf storage with full security.




Order legs and cabinet pedestals with casters to make any Lista workbench a workstation on wheels.

These are the basic steps required for ordering custom workbenches from Lista.

TO ORDER AN EASY-ORDER COMBINATION (WORKBENCH WITH PRECONFIGURED ACCESSORIES):

- PAGES 14-17 FOR INDUSTRIAL WORKBENCHES
- PAGES 24-25 FOR TECHNICAL ELECTRONIC WORKBENCHES
- PAGE 55 FOR ALIGN™ ADJUSTABLE HEIGHT WORKSTATIONS

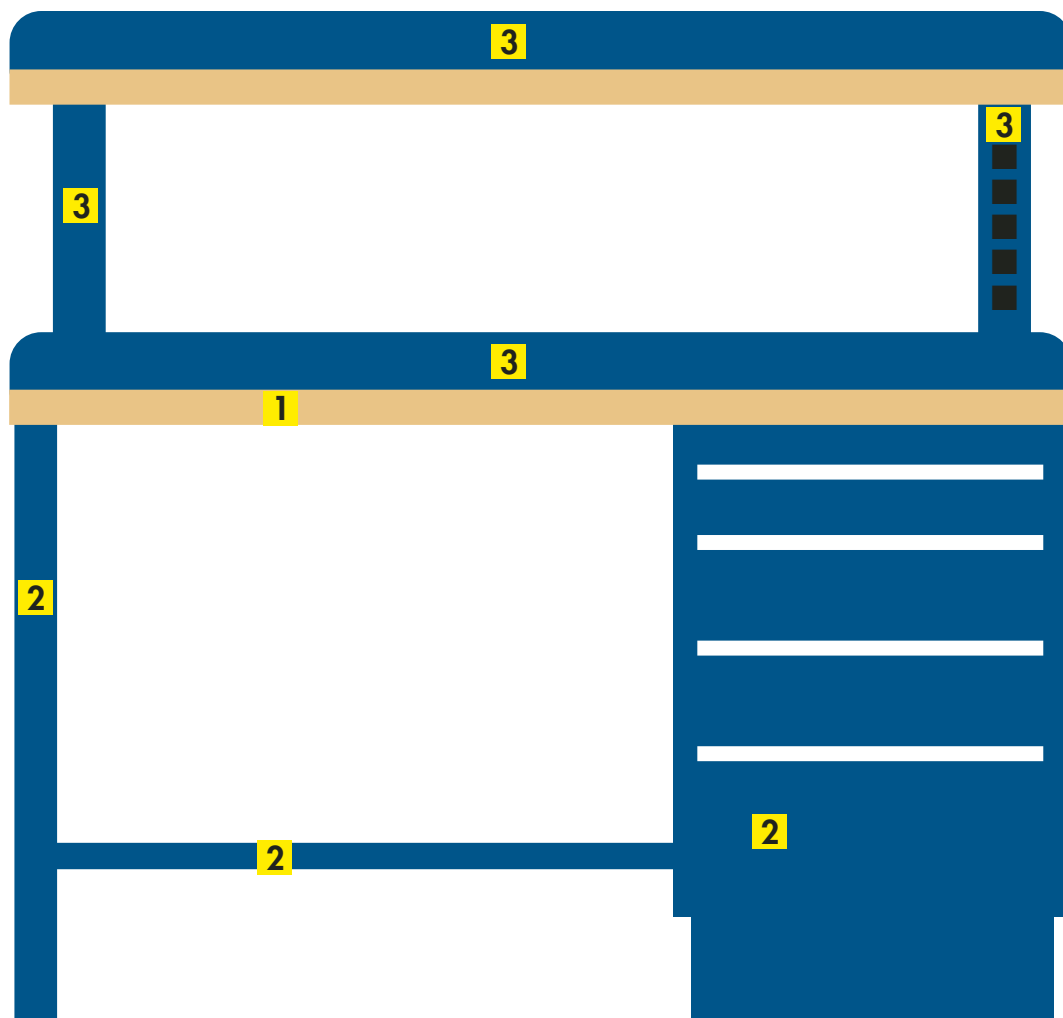

1 Select work surface

Select the work surface that best suits your needs from the choices on page 31. Choose the work surface length, depth and style that you prefer.

2 Select below-work surface accessories or bases

Select either 2-leg, 1-leg-with-cabinet or 2-cabinet configuration, or an Align adjustable height base. Legs, stringers, bottom shelves and privacy panels are shown on pages 32-34. Hanging drawers are shown on page 34. To select a cabinet pedestal(s), please see pages 38-49. For Align adjustable height bases, see pages 53-54.

3 Select above-work surface accessories

Select the backstop and endstops (page 36), shelves (stationary, adjustable or instrument riser — see pages 36-37) and/or Nexus™ System components (pages 60-69) that suit your needs.

4 Select colors

Select a color from the chart on the back cover. Cabinet housing and drawer fronts can be different colors, but drawer interiors are always gray.

Sample Workbench Order

QTY.	PART NO.	DESCRIPTION	
1	BTOP-60	butcher block work surface	1
1	NTL33.5X28.5	technical leg	2
1	NST-60NTLMP	stringer	2
1	MP0600-0402-F6RGGBB	Easy-Order cabinet pedestal	2
1	TBS-60	backstop	3
1	IRSS20	instrument riser support	3
1	IRSS20/15	instrument riser support	3
1	BS6012	butcher block riser shelf	3
1	ARSBS-60	shelf backstop	3
	BB	bright blue paint	4



Lista Tops

1 3/4" thick worksurface with wood core and 3/8" thick sanded oil-resistant pressed wood, top and bottom.

PART NO.	SIZE
LTOP-48	48" long x 30" deep
LTOP-60	60" long x 30" deep
LTOP-72	72" long x 30" deep
LTOP-84	84" long x 30" deep
LTOP-90	90" long x 30" deep
LTOP-96	96" long x 30" deep
LTOP-4836	48" long x 36" deep
LTOP-6036	60" long x 36" deep
LTOP-7236	72" long x 36" deep
LTOP-8436	84" long x 36" deep
LTOP-9036	90" long x 36" deep
LTOP-9636	96" long x 36" deep



Galvanized Steel Over Wood

Lista Top with additional heavy-gauge galvanized steel cover that is fitted over top and sides of wood core, 2" thick.


PART NO.	SIZE
LSTOP-48	48" long x 30" deep
LSTOP-60	60" long x 30" deep
LSTOP-72	72" long x 30" deep
LSTOP-84	84" long x 30" deep
LSTOP-90	90" long x 30" deep
LSTOP-96	96" long x 30" deep
LSTOP-4836	48" long x 36" deep
LSTOP-6036	60" long x 36" deep
LSTOP-7236	72" long x 36" deep
LSTOP-8436	84" long x 36" deep
LSTOP-9036	90" long x 36" deep
LSTOP-9636	96" long x 36" deep



Phenolic Resin

A high-pressure laminate designed for laboratory worksurfaces. Resistant to chemicals, stains or discoloration. Worksurface is 1" thick phenolic resin, available in black.

PART NO.	SIZE
RTOP-48	48" long x 30" deep
RTOP-60	60" long x 30" deep
RTOP-72	72" long x 30" deep
RTOP-84	84" long x 30" deep
RTOP-90	90" long x 30" deep
RTOP-96	96" long x 30" deep

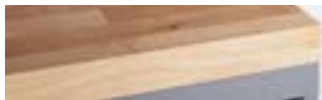

Butcher Block

Satin finish 1 3/4" thick hardwood. Available in standard square edge (shown above) or bullnose front edge. **To order a bullnose edge, add "BN" to the end of the part number.**

PART NO.	SIZE
BTOP-4824	48" long x 24" deep
BTOP-6024	60" long x 24" deep
BTOP-7224	72" long x 24" deep
BTOP-8424	84" long x 24" deep
BTOP-9024	90" long x 24" deep
BTOP-9624	96" long x 24" deep
BTOP-48	48" long x 30" deep
BTOP-60	60" long x 30" deep
BTOP-72	72" long x 30" deep
BTOP-84	84" long x 30" deep
BTOP-90	90" long x 30" deep
BTOP-96	96" long x 30" deep
BTOP-4836	48" long x 36" deep
BTOP-6036	60" long x 36" deep
BTOP-7236	72" long x 36" deep
BTOP-8436	84" long x 36" deep
BTOP-9036	90" long x 36" deep
BTOP-9636	96" long x 36" deep



Plastic Laminate

Particle board core with plastic laminated top and sides. 1 9/16" thick. Dove gray is standard but other colors are available on request. Available in standard square edge or bullnose front edge (shown above). **To order a bullnose edge, add "BN" to the end of the part number.**

PART NO.	SIZE
PTOP-4824	48" long x 24" deep
PTOP-6024	60" long x 24" deep
PTOP-7224	72" long x 24" deep
PTOP-8424	84" long x 24" deep
PTOP-9024	90" long x 24" deep
PTOP-9624	96" long x 24" deep
PTOP-48	48" long x 30" deep
PTOP-60	60" long x 30" deep
PTOP-72	72" long x 30" deep
PTOP-84	84" long x 30" deep
PTOP-90	90" long x 30" deep
PTOP-96	96" long x 30" deep
PTOP-4836	48" long x 36" deep
PTOP-6036	60" long x 36" deep
PTOP-7236	72" long x 36" deep
PTOP-8436	84" long x 36" deep
PTOP-9036	90" long x 36" deep
PTOP-9636	96" long x 36" deep



Static Dissipative Plastic Laminate

See page 35.



Stainless Steel Over Wood

Worksurface is constructed of durable, heavy gauge stainless steel, fitted over top and sides of wood core. Worksurface is 2" thick.

PART NO.	SIZE
LSSTOP-48	48" long x 30" deep
LSSTOP-60	60" long x 30" deep
LSSTOP-72	72" long x 30" deep
LSSTOP-84	84" long x 30" deep
LSSTOP-90	90" long x 30" deep
LSSTOP-96	96" long x 30" deep
LSSTOP-48X36	48" long x 36" deep
LSSTOP-60X36	60" long x 36" deep
LSSTOP-72X36	72" long x 36" deep
LSSTOP-84X36	84" long x 36" deep
LSSTOP-90X36	90" long x 36" deep
LSSTOP-96X36	96" long x 36" deep



Ball Transfer Worksurfaces

Ball transfer worksurfaces offer a cost effective, efficient means of workflow management for products or pallets in an assembly, repair or rework environment. Please contact your Lista representative for help in configuring a system and providing the solution best suited to your requirements.

Lista worksurfaces are all easy to maintain, rugged, and durable.

Worksurfaces come in 48", 60", 72", 84", 90" and 96" lengths, and are 30" or 36" deep. Other sizes, including 24" deep, are available, and certain worksurfaces are available with a bullnose front edge.

Workbench Below-Worksurface Accessories – Legs

The components on these two pages are the options available for supporting your worksurface.

Workbenches may also be supported by a pair of cabinets, or by one cabinet plus one of the legs shown on these pages.

All parts must be ordered separately.

Cabinet pedestals are shown on pages 38-49.

For Align™ adjustable height bases, see pages 53-54.

How to order workbench below-worksurface accessories

1. Select worksurface length and depth (see page 31).
2. Select base configuration, including number of cabinets (if any), cabinet size (Narrow Width, MP Width) and number of legs (if any).
Note: Sets of legs must be ordered at matching heights. Individual legs must be ordered to match the overall height of the cabinet or cabinet plus base (see chart to right).
3. Select stringer, bottom shelf or privacy panel part numbers to correspond to both length of worksurface and base configuration (see page 34).
4. Specify paint color from the chart on the back cover.

Leg Heights

Use the leg heights shown below to match a cabinet pedestal in a leg-plus-cabinet below-worksurface configuration.

LEG HEIGHT	MATCHES CAB. PEDESTAL
27 1/2"	600 height without base
29 1/2"	600 height with 2" base
31 1/2"	600 height with 4" base
33 1/2"	600 height with 6" base
35 1/2"	750 height without base
35 1/2" (mobile)	600 height with mobile base
39 1/2"	900 height without base
	750 height with 6" base




Lista Legs

Each welded one-piece leg assembly is 3 1/8" wide heavy gauge steel. Each foot has a bottom hole for leveling glide or anchoring. To order leveling glides, add "G" to the end of the part number.

PART NO.	WORKSURFACE DEPTH
27 1/2" (700mm) high	
NLL27.5X22.5	24" (610mm)
NLL27.5X28.5	30" (762mm)
NLL27.5X34.5	36" (915mm)
29 1/2" (750mm) high	
NLL29.5X22.5	24" (610mm)
NLL29.5X28.5	30" (762mm)
NLL29.5X34.5	36" (915mm)
31 1/2" (800mm) high	
NLL31.5X22.5	24" (610mm)
NLL31.5X28.5	30" (762mm)
NLL31.5X34.5	36" (915mm)
33 1/2" (850mm) high	
NLL33.5X22.5	24" (610mm)
NLL33.5X28.5	30" (762mm)
NLL33.5X34.5	36" (915mm)
39 1/2" (1000mm) high	
NLL39.5X22.5	24" (610mm)
NLL39.5X28.5	30" (762mm)
NLL39.5X34.5	36" (915mm)

Lista Mobile Legs

Same basic construction as the Lista Leg but with 2 factory mounted 6" heavy duty casters. Leg is available with either fixed casters (RB) or swivel casters with wheel locks (SB). **Requires stringer.**

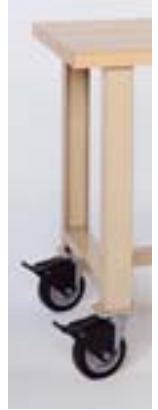

Fixed Casters

PART NO.	WORKSURFACE DEPTH
33 1/2" (850mm) high	
NM33.5X22.5RB	24" (610mm)
NM33.5X28.5RB	30" (762mm)
NM33.5X34.5RB	36" (915mm)
35 1/2" (900mm) high	
NM35.5X22.5RB	24" (610mm)
NM35.5X28.5RB	30" (762mm)
NM35.5X34.5RB	36" (915mm)

Swivel Casters

PART NO.	WORKSURFACE DEPTH
33 1/2" (850mm) high	
NM33.5X22.5SB	24" (610mm)
NM33.5X28.5SB	30" (762mm)
NM33.5X34.5SB	36" (915mm)
35 1/2" (900mm) high	
NM35.5X22.5SB	24" (610mm)
NM35.5X28.5SB	30" (762mm)
NM35.5X34.5SB	36" (915mm)



Panel Legs

Same basic construction as the Lista Leg with a welded panel on the outside of the leg. **To order leveling glides, add "G" to the end of the part number.**



PART NO.	WORKSURFACE DEPTH
27 1/2" (700mm) high	
NPL27.5X22.5	24" (610mm)
NPL27.5X28.5	30" (762mm)
NPL27.5X34.5	36" (915mm)
29 1/2" (750mm) high	
NPL29.5X22.5	24" (610mm)
NPL29.5X28.5	30" (762mm)
NPL29.5X34.5	36" (915mm)
31 1/2" (800mm) high	
NPL31.5X22.5	24" (610mm)
NPL31.5X28.5	30" (762mm)
NPL31.5X34.5	36" (915mm)
33 1/2" (850mm) high	
NPL33.5X22.5	24" (610mm)
NPL33.5X28.5	30" (762mm)
NPL33.5X34.5	36" (915mm)
39 1/2" (1000mm) high	
NPL39.5X22.5	24" (610mm)
NPL39.5X28.5	30" (762mm)
NPL39.5X34.5	36" (915mm)



Technical Legs

Legs include glides for leveling on uneven surfaces. Removable end caps allow access to glides. Can be configured for right or left hand installation. Assembly is required. Removable side panel can be ordered in a different color.

PART NO.	WORKSURFACE DEPTH
27 1/2" (700mm) high	
NPL27.5X22.5	24" (610mm)
NPL27.5X28.5	30" (762mm)
29 1/2" (750mm) high	
NPL29.5X22.5	24" (610mm)
NPL29.5X28.5	30" (762mm)
31 1/2" (800mm) high	
NPL31.5X22.5	24" (610mm)
NPL31.5X28.5	30" (762mm)
33 1/2" (850mm) high	
NPL33.5X22.5	24" (610mm)
NPL33.5X28.5	30" (762mm)
35 1/2" (900mm) high	
NPL35.5X22.5	24" (610mm)
NPL35.5X28.5	30" (762mm)
39 1/2" (1000mm) high	
NPL39.5X22.5	24" (610mm)
NPL39.5X28.5	30" (762mm)



Technical Mobile Legs

Each leg comes with 2 factory-mounted 3 1/2" x 1 1/4" casters, 1 swivel and 1 swivel with wheel lock. **Requires stringer.**

PART NO.	WORKSURFACE DEPTH
NPL33.5X22.5MS	24" (610mm)
NPL33.5X28.5MS	30" (762mm)



Bolting Adjustable Height Legs

Leg height is adjusted by re-bolting top and bottom leg sections together. Height adjusts in 2" increments. Range is 27 1/2" to 39 1/2". Requires stringer or bottom shelf, shown on page 34 (privacy panel not available). Not available with casters. **To order leveling glides, add "G" to the end of the part number.**

PART NO.	WORKSURFACE DEPTH
ALL22.5	24" (610mm)
ALL28.5	30" (762mm)
ALL34.5	36" (915mm)



Freestanding Footrest

Ergonomic footrest provides support for user's feet. Height adjustable from 3"-12 1/4". Footrest platform is 15" deep x 21 3/4" wide, and adjusts from totally flat to a 25° angle. Includes ribbed mat.

PART NO.
WB/FFR



How to order a stringer, bottom shelf or privacy panel

1. **Select part number** based on work-surface length.

2. **Specify left-hand** (facing the workbench) **bench support**.

NLL = Lista Leg
NTL = technical leg
NW = narrow width cabinet
MP = MP width cabinet

3. **Specify right-hand** (facing the workbench) **bench support**.

NLL = Lista Leg
NTL = technical leg
NW = narrow width cabinet
MP = MP width cabinet

4. **Select paint color.** For color chart, see back cover.

EXAMPLE: to order a bottom shelf for a Bright Blue workbench with a 72" work-surface, an MP Width cabinet as the left-hand pedestal and a technical leg as the right-hand support, the part number would be **NBS-72MPNTLBB**.



Stringers/Foot Rests

Heavy gauge U channel with 2 mounting holes on each end plate.

PART NO.	WORKSURFACE LENGTH
NST-48 <input type="checkbox"/> <input type="checkbox"/>	48"
NST-60 <input type="checkbox"/> <input type="checkbox"/>	60"
NST-72 <input type="checkbox"/> <input type="checkbox"/>	72"
NST-84 <input type="checkbox"/> <input type="checkbox"/>	84"
NST-96 <input type="checkbox"/> <input type="checkbox"/>	96"



Bottom Shelves

Heavy gauge steel shelf, 12" deep, for use as storage or foot rest.

PART NO.	WORKSURFACE LENGTH
NBS-48 <input type="checkbox"/> <input type="checkbox"/>	48"
NBS-60 <input type="checkbox"/> <input type="checkbox"/>	60"
NBS-72 <input type="checkbox"/> <input type="checkbox"/>	72"
NBS-84 <input type="checkbox"/> <input type="checkbox"/>	84"
NBS-96 <input type="checkbox"/> <input type="checkbox"/>	96"



CPU Holder

Mounts to underside of worksurface. 9 1/2" wide x 20" high x 19 1/2" deep. Painted to match bench.

PART NO.
CPU-H- <input type="checkbox"/>

This mobile workbench at Diamond Diagnostics features a plastic laminate worksurface, hanging drawer and bottom shelf for extra storage.



INDUSTRIAL LEG PRIVACY PANEL



TECHNICAL LEG PRIVACY PANEL

Privacy Panels

Steel panel attaches to leg or cabinet and runs full length of worksurface. 22 3/4" high.

PART NO.	WORKSURFACE LENGTH
NPP-48 <input type="checkbox"/> <input type="checkbox"/>	48"
NPP-60 <input type="checkbox"/> <input type="checkbox"/>	60"
NPP-72 <input type="checkbox"/> <input type="checkbox"/>	72"
NPP-84 <input type="checkbox"/> <input type="checkbox"/>	84"
NPP-96 <input type="checkbox"/> <input type="checkbox"/>	96"



Workbench Hanging Drawers

NW drawers: 16 1/8" wide x 28 1/2" deep
MP drawers: 21 1/2" wide x 28 1/2" deep

These drawers provide convenient below-work-surface storage where only a single drawer is needed. Each drawer is suspended from the worksurface. For 300 height cabinets suitable for hanging, see page 39 for NW cabinets, page 45-46 for MP cabinets, or contact your Lista distributor. For hanging drawers for Align™ bases, see page 54.

How to order a hanging drawer

1. **Select drawer.**

2. **Select lock type.**

NL = none **KA** = keyed-alike
RG = individual **MA** = master

Drawers ordered without locks cannot have lock installed at a later date.

3. **Select paint color.** For color chart, see back cover.

PART NO.	DRAWER HEIGHT
HC/NW50-WB- <input type="checkbox"/>	1 3/8"
HC/NW75-WB- <input type="checkbox"/>	2 3/8"
HC/NW100-WB- <input type="checkbox"/>	3 3/8"
HC/NW150-WB- <input type="checkbox"/>	5 1/4"
HC/NW300FFH-WB- <input type="checkbox"/>	11" (file drawer)
HC/MP50-WB- <input type="checkbox"/>	1 3/8"
HC/MP75-WB- <input type="checkbox"/>	2 3/8"
HC/MP100-WB- <input type="checkbox"/>	3 3/8"
HC/MP150-WB- <input type="checkbox"/>	5 1/4"






Wrist Strap and Cord

Adjustable wrist strap with 5' coiled cord. Includes 1 megohm resistor.

PART NO.
WS

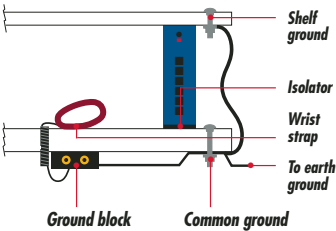

Ground Block and Cords

Ground block provides a convenient common grounding location for 2 wrist straps. Mounts to any flat, rigid surface.

Ground cords for worksurfaces have a 1 megohm resistor. They are included with static dissipative worksurfaces and shelves and ESD painted cabinets, but can be ordered separately.

PART NO.	DESCRIPTION
GB	ground block
GCT	ground cord for worksurf. (w/1 megohm)
GCS	ground cord for shelf (w/o 1 megohm)

Isolation Kits

Required to prevent a redundant ground (ground loop) with cabinet/worksurface grounding system. Necessary when powered items are used with either non-ESD painted Nexus™ accessories, ESD painted Nexus accessories with static dissipative worksurfaces, or powered instrument riser shelves on static dissipative worksurfaces.

PART NO.	DESCRIPTION
ESDISO-KIT/OHL	overhead light isolation kit
ESDISO-KIT/WUV	vertical power strip isolation kit
ESDISO-KIT/IRSS	instrument riser shelf isolation kit



Static Dissipative Plastic Laminate Worksurfaces and Shelves

Particle board core with plastic laminated top and sides, 1 9/16" thick. Grounding bolt and 10' grounding cord with a 1 megohm resistor included. Standard color is white but other colors available on request. Available in standard square edge or bullnose front edge (shown above). **To order a bullnose edge, add "BN" to end of part number.**

When using with electrical components other than horizontal power rail, Isolation Kit is required (see chart to left).

Worksurfaces display electrical properties within static dissipative boundaries of 10⁶ to 10⁹ ohms over a wide range of relative humidities (ranging from 60% RH to as low as 10% RH) to meet ESD specifications. Meets EOS/ESD S4.1 specifications. For detailed specifications, please contact Lista.

Static Dissipative Plastic Laminate Worksurfaces

PART NO.	SIZE
SDTOP-4824	48" long x 24" deep
SDTOP-6024	60" long x 24" deep
SDTOP-7224	72" long x 24" deep
SDTOP-8424	84" long x 24" deep
SDTOP-9024	90" long x 24" deep
SDTOP-9624	96" long x 24" deep
SDTOP-48	48" long x 30" deep
SDTOP-60	60" long x 30" deep
SDTOP-72	72" long x 30" deep
SDTOP-84	84" long x 30" deep
SDTOP-90	90" long x 30" deep
SDTOP-96	96" long x 30" deep
SDTOP-4836	48" long x 36" deep
SDTOP-6036	60" long x 36" deep
SDTOP-7236	72" long x 36" deep
SDTOP-8436	84" long x 36" deep
SDTOP-9036	90" long x 36" deep
SDTOP-9636	96" long x 36" deep

Static Dissipative Plastic Laminate Shelves

PART NO.	SIZE
SD4812	48" long x 12" deep
SD6012	60" long x 12" deep
SD7212	72" long x 12" deep
SD8412*	84" long x 12" deep
SD9012*	90" long x 12" deep
SD9612*	96" long x 12" deep
SD4815	48" long x 15" deep
SD6015	60" long x 15" deep
SD7215	72" long x 15" deep
SD8415*	84" long x 15" deep
SD9015*	90" long x 15" deep
SD9615*	96" long x 15" deep

* Lista recommends using a third center support with 84", 90" and 96" shelves

Conductive Plastic Boxes

See page 120 of Lista's General Storage Catalog.

Conductive Slotted Grooved Trays

See page 120 of Lista's General Storage Catalog.

Static Dissipative Paint

Five paint colors are available with ESD properties. All ESD painted parts conform to the following specifications:

Surface resistance: 10⁵-10⁹ ohms

5 points conformance testing: inside bottom surface of drawers, top surface of cabinets, and top surface of shelves. Drawers and partitions are painted completely with ESD paint.

PART NO.	PAINT COLOR
ESDDB	Bright Blue
ESDBK	Black
ESDCB	Classic Blue
ESDGR	Dark Gray
ESDLG	Light Gray

Lista offers a complete system of Electrostatic Discharge (ESD) accessories for areas that require a static safe environment.



The bench components on these two pages allow you to customize above the worksurface for your particular needs.

All parts must be ordered separately to match the length of the worksurface you have chosen.

How to order workbench above-worksurface accessories

1. Select worksurface length and depth (see page 31).
2. Select backstop, endstop, shelf or panel part numbers to correspond to both length and depth of worksurface.
3. Specify paint color from the chart on the back cover.



Backstops and Endstops

Made of steel. Backstops without endstops have rounded ends, and endstops have rounded front corners. Stops extend approximately 3" above the worksurface.

Backstops

PART NO.	WORKSURFACE LENGTH
TBS-48	48"
TBS-60	60"
TBS-72	72"
TBS-84	84"
TBS-90	90"
TBS-96	96"

Endstops (pair)

PART NO.	WORKSURFACE LENGTH
ES-22	24"
ES	30"
ES-34	36"

Backstop and Endstop Sets

PART NO.	WORKSURF. LENGTH	WORKSURF. DEPTH
BES-48	48"	30"
BES-60	60"	30"
BES-72	72"	30"
BES-84	84"	30"
BES-90	90"	30"
BES-96	96"	30"



Stationary Riser Shelves – 10 1/2" deep

Made of steel to support heavy loads. Shelf is 13 1/2" overall height (12" clearance). Optional lowered closed back rear panel is shown above.

Open Riser Shelves open shelf (open back, no shelf backstop)

PART NO.	WORKSURFACE LENGTH
SRS48	48"
SRS60	60"
SRS72	72"
SRS84	84"
SRS90	90"
SRS96	96"

Open Riser Shelves with Shelf Backstop shelf with backstop (open back)

PART NO.	WORKSURFACE LENGTH
SRS48-1	48"
SRS60-1	60"
SRS72-1	72"
SRS84-1	84"
SRS90-1	90"
SRS96-1	96"

Riser Shelves with Full Panel solid closed back, with shelf backstop

PART NO.	WORKSURFACE LENGTH
SRS48-2	48"
SRS60-2	60"
SRS72-2	72"
SRS84-2	84"
SRS90-2	90"
SRS96-2	96"

pegboard closed back, with shelf backstop

PART NO.	WORKSURFACE LENGTH
SRS48-2P	48"
SRS60-2P	60"
SRS72-2P	72"
SRS84-2P	84"
SRS90-2P	90"
SRS96-2P	96"

louvered closed back, with shelf backstop (shown above)

PART NO.	WORKSURFACE LENGTH
SRS48-2L	48"
SRS60-2L	60"
SRS72-2L	72"
SRS84-2L	84"
SRS90-2L	90"
SRS96-2L	96"



Stationary Riser Shelves – 15" deep

Provides additional storage depth. Particularly suited for supporting overhead cabinets (see page 103 of Lista's General Storage Catalog). Shelf is 13 1/2" overall height (12" clearance). Optional pegboard closed back rear panel is shown above.

Open Riser Shelves open shelf (open back, no shelf backstop)

PART NO.	WORKSURFACE LENGTH
SRS48-15D	48"
SRS60-15D	60"
SRS72-15D	72"
SRS84-15D	84"
SRS90-15D	90"
SRS96-15D	96"

Open Riser Shelves with Shelf Backstop shelf with backstop (open back)

PART NO.	WORKSURFACE LENGTH
SRS48-1-15D	48"
SRS60-1-15D	60"
SRS72-1-15D	72"
SRS84-1-15D	84"
SRS90-1-15D	90"
SRS96-1-15D	96"

Riser Shelves with Full Panel solid closed back, with shelf backstop

PART NO.	WORKSURFACE LENGTH
SRS48-2-15D	48"
SRS60-2-15D	60"
SRS72-2-15D	72"
SRS84-2-15D	84"
SRS90-2-15D	90"
SRS96-2-15D	96"

pegboard closed back, with shelf backstop (shown above)

PART NO.	WORKSURFACE LENGTH
SRS48-2P-15D	48"
SRS60-2P-15D	60"
SRS72-2P-15D	72"
SRS84-2P-15D	84"
SRS90-2P-15D	90"
SRS96-2P-15D	96"

louvered closed back, with shelf backstop

PART NO.	WORKSURFACE LENGTH
SRS48-2L-15D	48"
SRS60-2L-15D	60"
SRS72-2L-15D	72"
SRS84-2L-15D	84"
SRS90-2L-15D	90"
SRS96-2L-15D	96"



Adjustable Riser Shelf Assemblies

Shelves measure 1 1/4" thick x 12" deep. Shelf height can be adjusted in 1/2" increments from 12"-18". A steel backstop is available for the shelf assembly (ordered separately — see below). Includes the number of adjustable support brackets shown in the charts.

Assemblies with Gray Plastic Laminate Shelf

PART NO.	WORKSURF. LENGTH	NO. OF SUPPORTS
ARS48P	48"	2
ARS60P	60"	2
ARS72P	72"	2
ARS84P	84"	3
ARS90P	90"	3
ARS96P	96"	3

Assemblies with White Plastic Laminate Static Dissipative Shelf*

PART NO.	WORKSURF. LENGTH	NO. OF SUPPORTS
ARS48SD	48"	2
ARS60SD	60"	2
ARS72SD	72"	2
ARS84SD	84"	3
ARS90SD	90"	3
ARS96SD	96"	3

*Comes with grounding bolt and grounding cord. See page 35 for static dissipative specifications.

Assemblies with Butcher Block Shelf

PART NO.	WORKSURF. LENGTH	NO. OF SUPPORTS
ARS48B	48"	2
ARS60B	60"	2
ARS72B	72"	2
ARS84B	84"	2
ARS90B	90"	3
ARS96B	96"	3

Backstops for Riser Shelves (For Adjustable and Instrument Risers)

Made of steel with rounded corners. Stops extend approximately 3" above the shelf surface.

PART NO.	SHELF LENGTH
ARSBS-48	48"
ARSBS-60	60"
ARSBS-72	72"
ARSBS-84	84"
ARSBS-90	90"
ARSBS-96	96"

Adjustable Support Bracket

Bracket supports riser shelf. May be required to supplement the supports included with shelf assemblies (see charts above) for support of long shelves or shelves carrying heavy loads.

PART NO.

ARS-BR



Instrument Riser Shelf Supports

Either 16", 20" or 24" high, with removable side panels. 20" and 24" models provide extra space to run air lines or meet additional power requirements. Ordered individually. Shelves ordered separately (see right). See page 35 for isolation kits when used with static dissipative worksurfaces.

16" High Supports

PART NO.	DESCRIPTION
IRSS16	no power
IRSS16/15	with 15 amp
IRSS16/20	with 20 amp
IRSS16/GF-15	with 15 amp GFCI
IRSS16/GF-20	with 20 amp GFCI

Lista recommends using a third center support with 84", 90" and 96" shelves

20" High Supports

PART NO.	DESCRIPTION
IRSS20	no power
IRSS20/15	with 15 amp
IRSS20/20	with 20 amp
IRSS20/GF-15	with 15 amp GFCI
IRSS20/GF-20	with 20 amp GFCI

Lista recommends using a third center support with 84", 90" and 96" shelves

24" High Supports

PART NO.	DESCRIPTION
IRSS24	no power
IRSS24/15	with 15 amp
IRSS24/20	with 20 amp
IRSS24/GF-15	with 15 amp GFCI
IRSS24/GF-20	with 20 amp GFCI

Lista recommends using a third center support with 84", 90" and 96" shelves



Riser Shelves

All shelves measure 1 1/4" thick x 12" or 15" deep and mount to shelf supports. Add "12" or "15" in place of the green box (■) in the part number to specify a shelf depth of 12" or 15". Backstops for shelves can be ordered from the chart to left.

Gray Plastic Laminate Shelves

PART NO.	LENGTH
PS48 ■	48"
PS60 ■	60"
PS72 ■	72"
PS84 ■*	84"
PS90 ■*	90"
PS96 ■*	96"

*Lista recommends using a third center support with 84", 90" and 96" shelves

White Plastic Laminate Static Dissipative* Shelves

PART NO.	LENGTH
SD48 ■	48"
SD60 ■	60"
SD72 ■	72"
SD84 ■**	84"
SD90 ■**	90"
SD96 ■**	96"

*Comes with grounding bolt and grounding cord.

See page 35 for static dissipative specifications.

**Lista recommends using a third center support with 84", 90" and 96" shelves

Butcher Block Shelves

PART NO.	LENGTH
BS48 ■	48"
BS60 ■	60"
BS72 ■	72"
BS84 ■*	84"
BS90 ■*	90"
BS96 ■*	96"

*Lista recommends using a third center support with 84", 90" and 96" shelves



Instrument Riser Shelf Rear Panels

Full rear panel extends from work surface to form back panel between the work surface and riser shelf. Available flush with the shelf or with a 2" backstop for the riser shelf.

How to order a rear panel

1. Select part number.

2. ■ Specify shelf length.

48 = 48" long
60 = 60" long
72 = 72" long
84 = 84" long
90 = 90" long
96 = 96" long

3. ■ Specify shelf support height.

16 = 16" high
20 = 20" high
24 = 24" high

EXAMPLE: to order a pegboard rear panel for a 72" long shelf with 16" shelf supports, the part number is IRS-FRP7216-P.

PART NO.	DESCRIPTION
Flush with shelf	
IRS-FRP ■ ■	solid rear panel
IRS-FRP ■ ■-P	pegboard rear panel
IIRS-FRP ■ ■-L	louvered rear panel
With 2" backstop	
IRS-FRP ■ ■-2	solid rear panel
IRS-FRP ■ ■-2P	pegboard rear panel
IRS-FRP ■ ■-2L	louvered rear panel

Above-worksurface accessories using the Nexus™ System are shown on pages 60-69.

