

Mezzanine Safeti-Gate

Mezzanine Safeti-Gates, Inc. ♦ 174 Western Avenue, Essex, MA 01929-1110

TEL ♦ 978-768-7593

FAX ♦ 978-768-1101

Website: www.MezzanineSafetyGates.com

Email: sales@MezzanineSafetyGates.com

Pivot Model

The Pivot model in the Roly Safeti-Gate line is an economic safety gate for elevated mezzanine ledges. Ergonomic fingertip operation provides ease of use while preventing injury.

Two permanently fixed stanchions anchored to the mezzanine ledge provide the framework for two gates connected to the pivot arms. The unique design prevents worker exposure to the ledge during all phases of the handling operation.

Pivot safety gates are available in painted, stainless or galvanized steel and aluminum, making them an ideal solution within hostile environments, such as chemical and food processing plants.


No special tools are required to install a Pivot safety gate, and assembly generally requires no more than one hour.



U.S. PATENT NO. 5,546,703

- A. Clearance Height
- B. Drop Area Width
- C. Drop Area Depth
- D. Overall Width
- E. Overall Depth
- F. Overall Height

NOTE: Maximum load height is 54"

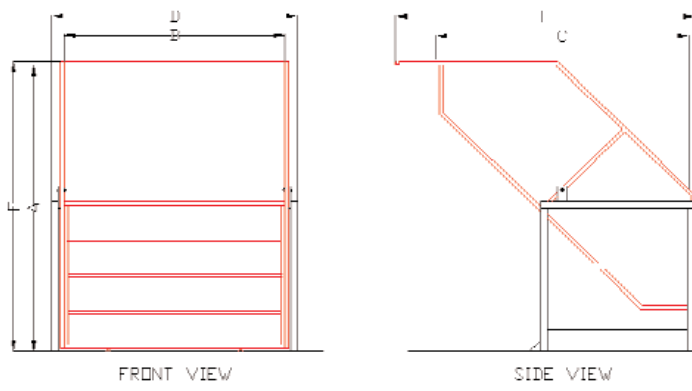

MODEL	CLEARANCE HEIGHT (A)	DROP AREA WIDTH (B)	DROP AREA DEPTH (C)	OVERALL WIDTH (D)	OVERALL DEPTH (E)	OVERALL HEIGHT (F)
Pivot Single Wide	80"	60"	69"	67"	71"	82"
Pivot Double Wide	80"	100"	69"	107"	71"	82"

An **OPEN** and **SHUT** Case for Plant Mezzanine Safety