MULTI-TIER /TWO PERSON/DUPLEX AND DUAL ASSEMBLY INSTRUCTIONS

Assemble lockers using the Single or Double Tier Instructions, during **Operation 2** add the appropriate shelf, top, bottom or partition.

Shelf Spacing Guidelines

Single tier lockers have a shelf approx. 9" below the top of the locker.
For **Multi-tier** locker take the height of the locker and divide the number of doors to get shelf spacing.
Example: *Height 72", Number of Doors 6, 72"/6 = 12" distance between shelves.*
Locker doors and frame can also be used as a template for shelf or flat top (T.A.B.) positioning.

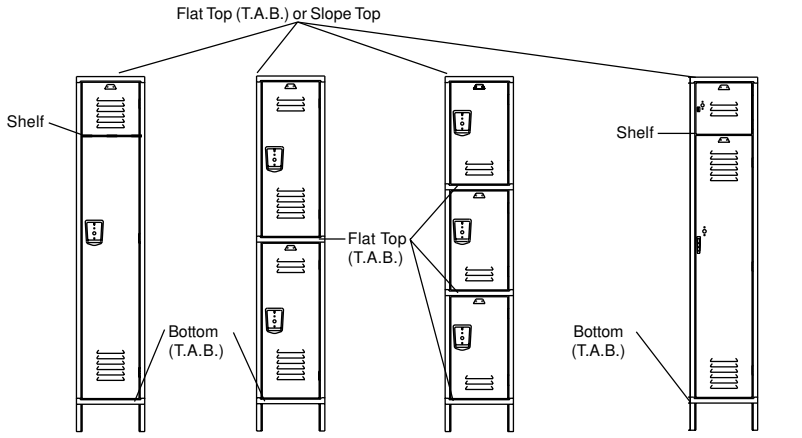

1 Tier
2 Top and Bottom (T.A.B.)
1 Intermediate Shelf

2 Tier
3 Top and Bottom (T.A.B.)

3 Tier
4 Top and Bottom (T.A.B.)

Box Over
2 Top and Bottom (T.A.B.)
1 Intermediate Shelf

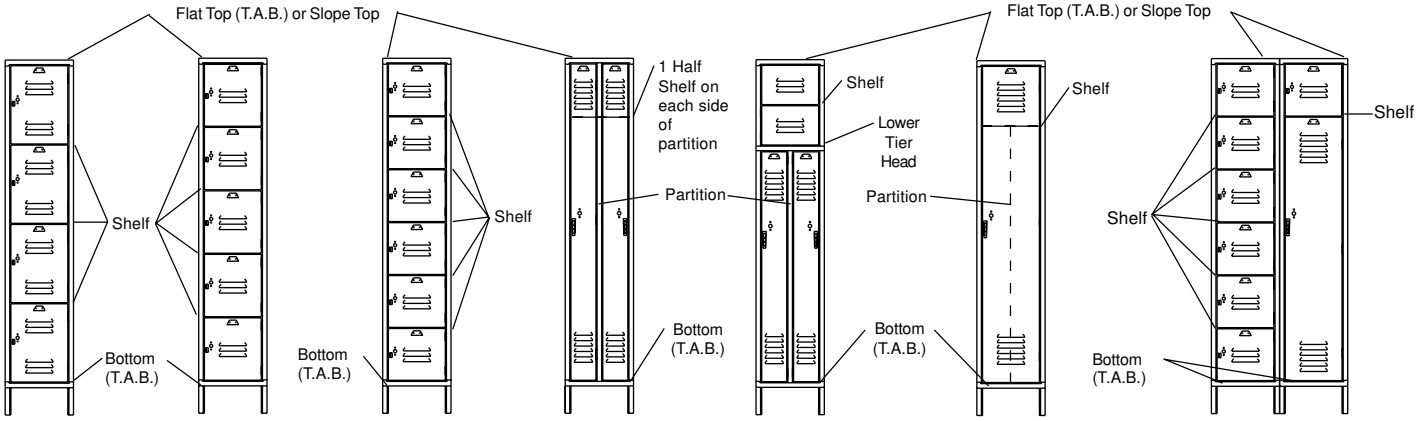

4 Tier
2 Top and Bottom (T.A.B.)
3 Intermediate Shelf

5 Tier
2 Top and Bottom (T.A.B.)
4 Intermediate Shelf

6 Tier
2 Top and Bottom (T.A.B.)
5 Intermediate Shelf

Duplex
2 Top and Bottom (T.A.B.)
2 Half Shelves
1 Partition DX

2 Person
2 Top and Bottom (T.A.B.)
1 Lower Tier Head
1 Intermediate Shelf
1 Partition 2P

Dual
1 Shelves
2 Top and Bottom (T.A.B.)
1 Partition 2D

7 Person
4 Top and Bottom (T.A.B.)
6 Intermediate Shelf

The hole punching pattern on Divisions are the same for all lockers <u>except</u> for 5 Tier Lockers and 16 gauge Exposed End Panels.

2 Person, Duplex and Dual Locker Supplemental Instructions

2 Person Bolt bottom (T.A.B.) to bottom of back and division. Bolt partition to bottom (T.A.B). Bolt a Lower Tier Head to top of partition and divisions. Then bolt shelf above the top of partition. Bolt coat hooks on the inside of divisions and both sides of partition using the same bolt (where possible). Place top (T.A.B.) at top of locker and bolt to back and divisions. Proceed to Operation 3 of Assembly of Single Row or Double Row Lockers.

Dual Bolt bottom (T.A.B.) to bottom of back and division. Bolt partition to bottom. Install coat rod hooks on the inside of divisions and both sides of partition using the same bolt (where possible). Spread apart partition and division and insert coat rod into coat rod holder on coat rod hook. Place bottom of the shelf against top of partition and bolt to divisions. Place top (T.A.B.) at top of locker and bolt to back and divisions. Proceed to Operation 3 of Assembly of Single Row or Double Row Lockers.

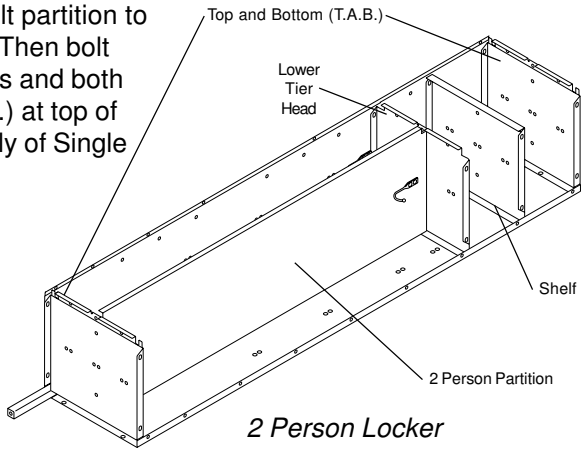

2 Person Locker

Duplex Bolt bottom (T.A.B.) to bottom of back and division. Bolt partition to bottom (T.A.B.). Bolt 2 half shelves to each side of partition and divisions. Bolt coat hooks on the inside of divisions and both sides of partition using the same bolt (where possible). Place top (T.A.B.) at top of locker and bolt to back and divisions. Proceed to Operation 3 of Assembly of Single Row or Double Row Lockers.

Single row lockers must be floor and wall anchored,
double row lockers must be floor anchored and if possible wall or ceiling anchored.