


Slider Bed Model 335

SPECIFICATIONS

Effective Widths:	5"-31" in 1" increments
Live Loads:	150 lbs. @ 45° incline 400 lbs. @ horizontal 20 lbs./ft. of length (maximum)
Frame:	Formed 12 ga.
Lengths:	3 ft. to 25 ft. in 1 ft. increments
Belt Speed:	1/4 H.P. @ 20 FPM 1/2 H.P. @ 40 FPM 3/4 H.P. @ 65 FPM 1 H.P. @ 107 FPM Other speeds available on request
Belt Types:	PVC, RMV and Urethane
Standard:	Effective Widths: 9", 13", 17", 19", 25" and 31" Belt Speeds: 20, 40 and 65 FPM

Choosing stock widths enables one day ship on most replacement parts as well

Typical Cross Section

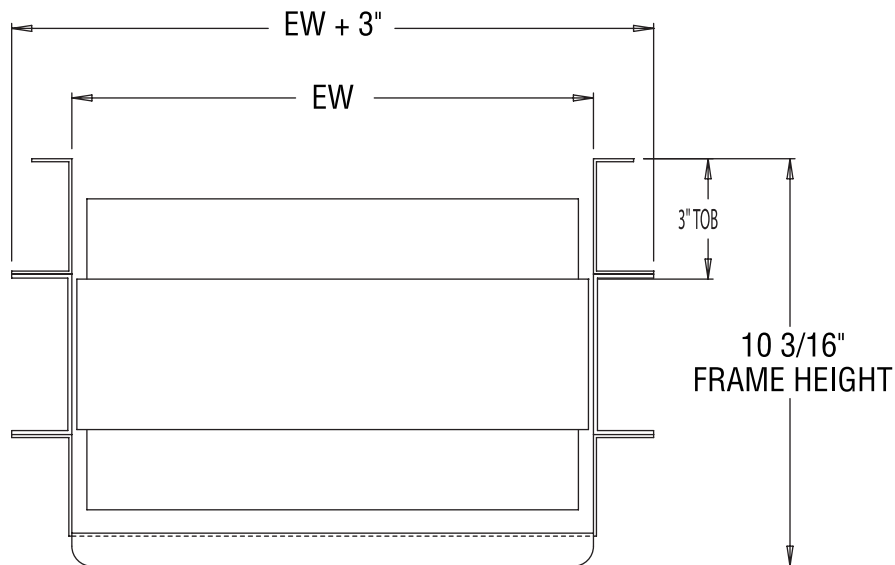

*This drawing is for dimensional reference only.
It may not accurately depict the final conveyor design.*



P.O. Box 205 • Alpena, MI 49707 • fax (989) 358-7065 • voice (800) 356-1593

Visit us on the world wide web: www.endura-veyor.com