


Conveyor Accessories



Contact Stockyard for available supports.

Floor Supports and Casters

Stationary Floor Supports MS, LS, RS, & HS Types

- 1) Select support type. Refer to standard specifications on appropriate catalog page per model. RS, LS & MS supports rated for 1500 lbs. maximum. HS rated for 4000 lbs. maximum.
- 2) Model chart will list top of belt/roller/channel for each model.
- 3) Add the dimension shown to the appropriate minimum and maximum elevation from the coordinating floor support chart to the right. This will give you the elevation adjustment for model selected.

Example: Model TA uses MS type supports per the specifications on page 5 of this catalog. On the TA model support chart below the dimension is 4-1/8". The chart to the right shows MS-6 support minimum and maximum elevations to be 23-5/8" to 35-5/8". When the 4-1/8" dimension is added to the minimum and maximum elevations, total elevations on a Model TA with MS-6 supports is 27-3/4" to 39-3/4".

| MODELS | Top of Roller |
|---------------------------------------|---------------|
| SSR, SSR, SSR, Ball Transfer In SSR | 2-3/4 |
| SW, SWC, SWS, Ball Transfer In SW | 2-13/16 |
| 138-NSP, NSPC, NSPS, NSPSS, 138-NSPEZ | 9-3/4 |
| 138-ACC, LRC, LRS, LRSS | 6-3/4 |

| Support | MIN | MAX |
|---------|----------|---------|
| LSL-1 | 2 | 3 |
| LSL-2 | 3 | 4-3/4 |
| LSL-3 | 4-3/4 | 7-3/8 |
| LS-01 | 7-5/16 | 9-1/16 |
| LS-01.2 | 8-5/16 | 10-1/16 |
| LS-01.4 | 9-5/16 | 11-1/16 |
| LS-02 | 10-5/16 | 13-5/16 |
| LS-03 | 12-15/16 | 15-5/16 |
| LS-04 | 15-15/16 | 21-5/16 |

| Support | MIN | MAX |
|---------|----------|-----------|
| LS-05 | 19-15/16 | 25-15/16 |
| LS-06 | 23-15/16 | 35-15/16 |
| LS-07 | 33-15/16 | 45-15/16 |
| LS-08 | 45-15/16 | 57-15/16 |
| LS-09 | 57-15/16 | 69-15/16 |
| LS-10 | 69-15/16 | 81-15/16 |
| LS-11 | 79-15/16 | 91-15/16 |
| LS-12 | 91-15/16 | 103-15/16 |

| MODELS | Top of Roller |
|-----------------|---------------|
| 138 NSP Drive | 9-3/4 |
| 138 NSPEZ Drive | 9-3/4 |

| Support | MIN | MAX |
|----------|----------|----------|
| LSN-01 | 12-3/16 | 13-15/16 |
| LSN-01.2 | 13-3/16 | 14-15/16 |
| LSN-01.4 | 14-3/16 | 15-15/16 |
| LSN-02 | 15-3/16 | 18-3/16 |
| LSN-03 | 17-11/16 | 20-11/16 |
| LSN-04 | 20-11/16 | 26-11/16 |
| LSN-05 | 24-11/16 | 30-11/16 |

| Support | MIN | MAX |
|---------|----------|-----------|
| LSN-06 | 28-11/16 | 40-11/16 |
| LSN-07 | 38-11/16 | 50-11/16 |
| LSN-08 | 50-11/16 | 62-11/16 |
| LSN-09 | 62-11/16 | 74-11/16 |
| LSN-10 | 74-11/16 | 86-11/16 |
| LSN-11 | 84-11/16 | 96-11/16 |
| LSN-12 | 96-11/16 | 108-11/16 |

| MODELS | Top of Belt or Roller |
|---|-----------------------|
| 20-CR, CRC, CRS, CRSS, 19/20-SR, SRC, SRS, Ball Transfer | 3-3/4 |
| TR | 4-1/4 |
| TA | 4-1/8 |
| TL, 190-LR, 190-ACC, LRC, LRS, LRSS, 190-ACZ, ABEZ-Intermediate, C, PC, R-Gear Red, Drive | 6-3/4 |
| 199-CRR, CRRC | 3-3/4 |
| TH | 5-13/16 |
| SB, RB | 6-7/8 |
| RB-8" End Drive | 10-3/8 |
| SBI, RBI | 7-1/16 |
| 190-NSP, NSPC, NSPS, NSPSS, 190-NSPEZ, NSPEZC | 9-3/4 |
| SC-Intermediate | 6-13/16 |
| SC-Diverter, Center Leg | 16-1/16 |
| PSB, PSBC | 7-3/4 |
| TW | 7-3/8 |
| CCEZ, CCAC | 10-1/8 |
| Prosport Induction | 6-7/8 |
| GAPPER, GAPPER L - INTI/TAIL | 6-7/8 |
| GAPPER, GAPPER L - DRIVE MODULE | 19-3/8 |
| 190 PREZ | 4-3/4 |
| 190 PREZC | 4-3/4 |
| ART | 8 |
| 199-CREZD | 3-3/4 |
| CRB | 4-1/8 |

| Support | MIN | MAX |
|---------|--------|--------|
| MSL-1 | 2 | 3 |
| MSL-2 | 3 | 4-3/4 |
| MSL-3 | 4-3/4 | 7-3/8 |
| MS-01 | 7 | 8-3/4 |
| MS-01.2 | 8 | 9-3/4 |
| MS-01.4 | 9 | 10-3/4 |
| MS-02 | 10 | 13 |
| MS-03 | 12-5/8 | 15-5/8 |
| MS-04 | 15-5/8 | 21-5/8 |

| Support | MIN | MAX |
|---------|--------|---------|
| MS-05 | 19-5/8 | 25-5/8 |
| MS-06 | 23-5/8 | 35-5/8 |
| MS-07 | 33-5/8 | 45-5/8 |
| MS-08 | 45-5/8 | 57-5/8 |
| MS-09 | 57-5/8 | 69-5/8 |
| MS-10 | 69-5/8 | 81-5/8 |
| MS-11 | 79-5/8 | 91-5/8 |
| MS-12 | 91-5/8 | 103-5/8 |

| MODELS | Top of Belt |
|---------------------------------------|-------------|
| TA-8" END DRIVE; TL-8" END DRIVE, CRB | 6-1/4 |

| Support | MIN | MAX | Support | MIN | MAX |
|----------|---------|---------|---------|----------|-----------|
| MSD-0-10 | 3-3/4 | 3-3/4 | MSD-03 | 15-13/16 | 18-13/16 |
| MSD-0-11 | 4-3/4 | 4-3/4 | MSD-04 | 18-13/16 | 24-13/16 |
| MSD-0-12 | 5-3/4 | 5-3/4 | MSD-05 | 22-13/16 | 28-13/16 |
| MSD-0-13 | 6-3/4 | 6-3/4 | MSD-06 | 26-13/16 | 38-13/16 |
| MSD-0-14 | 7-3/4 | 7-3/4 | MSD-07 | 36-13/16 | 48-13/16 |
| MSD-0-15 | 8-3/4 | 8-3/4 | MSD-08 | 48-13/16 | 60-13/16 |
| MSD-0-16 | 9-3/4 | 9-3/4 | MSD-09 | 60-13/16 | 72-13/16 |
| MSD-01 | 10-5/16 | 12-1/16 | MSD-10 | 72-13/16 | 84-13/16 |
| MSD-01.2 | 11-5/16 | 13-1/16 | MSD-11 | 82-13/16 | 94-13/16 |
| MSD-01.4 | 12-5/16 | 14-1/16 | MSD-12 | 94-13/16 | 106-13/16 |
| MSD-02 | 13-5/16 | 16-5/16 | | | |

CONVEYOR ACCESSORIES



| MODELS | Top of Belt |
|----------------|-------------|
| 190 NSP, NSPEZ | 9-3/4 |

| Support | MIN | MAX | Support | MIN | MAX |
|----------|----------|----------|---------|----------|-----------|
| MSN-01 | 7 | 8-3/4 | MSN-06 | 23-15/16 | 35-15/16 |
| MSN-01.2 | 8 | 9-3/4 | MSN-07 | 33-15/16 | 45-15/16 |
| MSN-01.4 | 9 | 10-3/4 | MSN-08 | 45-15/16 | 57-15/16 |
| MSN-02 | 10 | 13 | MSN-09 | 57-15/16 | 69-15/16 |
| MSN-03 | 12-15/16 | 15-15/16 | MSN-10 | 69-15/16 | 81-15/16 |
| MSN-04 | 15-15/16 | 21-15/16 | MSN-11 | 79-15/16 | 91-15/16 |
| MSN-05 | 19-15/16 | 25-15/16 | MSN-12 | 91-15/16 | 103-15/16 |

| MODELS | Top of Roller |
|---------------------------------|---------------|
| 25 / 26 SR, SRC - SET LOW | 3-1/4 |
| 25 / 26 SR, SRC, SRS - SET HIGH | 4-3/8 |
| 35 SR - SET LOW | 4-1/4 |
| 35 SR - SET HIGH | 4-3/8 |
| 25 / 26 CRR, CRRC, CRRCT | 4-3/8 |
| PLEZD | 8 |

| Support | MIN | MAX | Support | MIN | MAX |
|---------|--------|--------|---------|--------|--------|
| HSL-01 | | 1/2 | HS-05 | 16-5/8 | 19-5/8 |
| HSL-02 | | 1/2 | HS-06 | 19-5/8 | 25-5/8 |
| HSL-03 | | 1/2 | HS-07 | 25-5/8 | 31-5/8 |
| HSL-04 | 1/2 | 2-1/4 | HS-08 | 31-5/8 | 43-5/8 |
| HSL-05 | 2-1/4 | 6-1/8 | HS-09 | 43-5/8 | 55-5/8 |
| HS-01 | 6-1/8 | 7-5/8 | HS-10 | 55-5/8 | 67-5/8 |
| HS-02 | 7-5/8 | 10-5/8 | HS-11 | 67-5/8 | 79-5/8 |
| HS-03 | 10-5/8 | 13-5/8 | HS-12 | 79-5/8 | 91-5/8 |
| HS-04 | 13-5/8 | 16-5/8 | | | |

| MODELS | Top of Roller |
|--------------------------|---------------|
| 25-CREZD | 4-3/8 |
| 25 / 26 CRR, CRRC, CRRCT | 4-3/8 |

| Support | MIN | MAX | Support | MIN | MAX |
|---------|--------|--------|---------|--------|--------|
| HSA-E2 | 7-5/8 | 10-5/8 | HSA-07 | 25-5/8 | 31-5/8 |
| HSA-M2 | 7-5/8 | 10-5/8 | HSA-08 | 31-5/8 | 43-5/8 |
| HSA-03 | 10-5/8 | 13-5/8 | HSA-09 | 43-5/8 | 55-5/8 |
| HSA-04 | 13-5/8 | 16-5/8 | HSA-10 | 55-5/8 | 67-5/8 |
| HSA-05 | 16-5/8 | 19-5/8 | HSA-11 | 67-5/8 | 79-5/8 |
| HSA-06 | 19-5/8 | 25-5/8 | HSA-12 | 79-5/8 | 91-5/8 |

| MODELS | Top of Belt |
|---------------------------------------|-------------|
| WC-DRIVE | 8-1/8 |
| WC-TAIL | 5-3/8 |
| 138 / 190 ACC GATES (SPRING BALANCED) | 9-1/2 |
| 19 / 20 GATES (GASSPRING) | 12-3/4 |
| 138 / SW GATES (SPRING BALANCED) | 3-3/4 |
| 19 / 20 GATES (SPRING BALANCED) | 4-3/4 |

| Support | MIN | MAX | Support | MIN | MAX |
|---------|----------|----------|---------|----------|-----------|
| RS-01 | 6-7/16 | 8-3/16 | RS-06 | 22-15/16 | 34-15/16 |
| RS-01.2 | 7-7/16 | 9-3/16 | RS-07 | 32-15/16 | 44-15/16 |
| RS-01.4 | 8-7/16 | 10-3/16 | RS-08 | 44-15/16 | 56-15/16 |
| RS-02 | 9-7/16 | 12-7/16 | RS-09 | 56-15/16 | 68-15/16 |
| RS-03 | 11-15/16 | 14-5/16 | RS-10 | 68-15/16 | 80-15/16 |
| RS-04 | 14-15/16 | 20-15/16 | RS-11 | 78-15/16 | 90-15/16 |
| RS-05 | 18-15/16 | 24-15/16 | RS-12 | 90-15/16 | 102-15/16 |

| MODELS | Top of Blet |
|--------|-------------|
| PCA | 2-9/16 |

OVERHEAD DRIVE

| Support | MIN | MAX | Support | MIN | MAX |
|-----------|----------|----------|---------|----------|-----------|
| PCAS-01 | 6-7/16 | 8-3/16 | PCAS-06 | 22-15/16 | 34-15/16 |
| PCAS-01.2 | 7-7/16 | 9-3/16 | PCAS-07 | 32-15/16 | 44-15/16 |
| PCAS-01.4 | 8-7/16 | 10-3/16 | PCAS-08 | 44-15/16 | 56-15/16 |
| PCAS-02 | 9-7/16 | 12-7/16 | PCAS-09 | 56-15/16 | 68-15/16 |
| PCAS-03 | 11-15/16 | 14-15/16 | PCAS-10 | 68-15/16 | 80-15/16 |
| PCAS-04 | 14-15/16 | 20-15/16 | PCAS-11 | 78-15/16 | 90-15/16 |
| PCAS-05 | 18-15/16 | 24-15/16 | PCAS-12 | 90-15/16 | 102-15/16 |

UNDERSIDE DRIVE

| Support | MIN | MAX | Support | MIN | MAX |
|----------|----------|----------|----------|----------|-----------|
| PCASU-04 | 14-15/16 | 20-15/16 | PCASU-09 | 56-15/16 | 68-15/16 |
| PCASU-05 | 18-15/16 | 24-15/16 | PCASU-10 | 68-15/16 | 80-15/16 |
| PCASU-06 | 22-15/16 | 34-15/16 | PCASU-11 | 78-15/16 | 90-15/16 |
| PCASU-07 | 32-15/16 | 44-15/16 | PCASU-12 | 90-15/16 | 102-15/16 |
| PCASU-08 | 44-15/16 | 56-15/16 | | | |

| MODELS | Top of Channel |
|--------|----------------|
| PCH | 8-5/8 |

| Support | MIN | MAX | Support | MIN | MAX |
|---------|--------|--------|---------|--------|--------|
| PCHS-01 | 6-1/8 | 7-5/8 | PCHS-07 | 25-5/8 | 31-5/8 |
| PCHS-02 | 7-5/8 | 10-5/8 | PCHS-08 | 31-5/8 | 43-5/8 |
| PCHS-03 | 10-5/8 | 13-5/8 | PCHS-09 | 43-5/8 | 55-5/8 |
| PCHS-04 | 13-5/8 | 16-5/8 | PCHS-10 | 55-5/8 | 67-5/8 |
| PCHS-05 | 16-5/8 | 19-5/8 | PCHS-11 | 67-5/8 | 79-5/8 |
| PCHS-06 | 19-5/8 | 25-5/8 | PCHS-12 | 79-5/8 | 91-5/8 |

| MODELS | Top of Side Channel |
|--------|---------------------|
| PCX | 7-1/4 |

| Support | MIN | MAX | Support | MIN | MAX |
|-----------|--------|--------|---------|--------|---------|
| PCXSL-01 | 2 | 3 | PCXS-05 | 19-5/8 | 25-5/8 |
| PCXSL-02 | 3 | 4-3/4 | PCXS-06 | 23-5/8 | 35-5/8 |
| PCXSL-03 | 4-3/4 | 7-3/8 | PCXS-07 | 33-5/8 | 45-5/8 |
| PCXS-01 | 7 | 8-3/4 | PCXS-08 | 45-5/8 | 57-5/8 |
| PCXS-01.2 | 8 | 9-3/4 | PCXS-09 | 57-5/8 | 69-5/8 |
| PCXS-01.4 | 9 | 10-3/4 | PCXS-10 | 69-5/8 | 81-5/8 |
| PCXS-02 | 10 | 13 | PCXS-11 | 79-5/8 | 91-5/8 |
| PCXS-03 | 12-5/8 | 15-5/8 | PCXS-12 | 91-5/8 | 103-5/8 |
| PCXS-04 | 15-5/8 | 21-5/8 | | | |



| MODELS | Top of Belt |
|---|-------------|
| PROSORT 400 - DRIVE | 38-1/2 |
| PROSORT 400 - INTER / TAIL | 21-1/2 |
| PROSORT 400 - INDUCTION DRIVE | 17-9/16 |
| PROSORT 400 - INDUCTION | 6-7/8 |
| PROSORT 100 - DRIVE | 29-1/4 |
| PROSORT 100 - DRIVE (Low Elev. 75' Lg or Less) | 19-1/4 |
| PROSORT 100 - INTER / TAIL | 14-1/4 |
| PROSORT 100 - INDUCTION DRIVE | 6-7/8 |
| EXPRESSWAY | 8-3/16 |

| Support | MIN | MAX | Support | MIN | MAX |
|---------|--------|--------|---------|--------|--------|
| MHS-01 | 6-1/8 | 7-5/8 | MHS-07 | 25-5/8 | 31-5/8 |
| MHS-02 | 7-5/8 | 10-5/8 | MHS-08 | 31-5/8 | 43-5/8 |
| MHS-03 | 10-5/8 | 13-5/8 | MHS-09 | 43-5/8 | 55-5/8 |
| MHS-04 | 13-5/8 | 16-5/8 | MHS-10 | 55-5/8 | 67-5/8 |
| MHS-05 | 16-5/8 | 19-5/8 | MHS-11 | 67-5/8 | 79-5/8 |
| MHS-06 | 19-5/8 | 25-5/8 | MHS-12 | 79-5/8 | 91-5/8 |

| MODELS | Top of Roller |
|---------|---------------|
| 25 LRA | - |
| 25 LREZ | - |

| INTERMEDIATE | | DRIVE AND TAIL | |
|--------------|----------|----------------|----------|
| Support | NON-ADJ. | Support | NON-ADJ. |
| LRAS-12 | 12 | - | 12 |
| LRAS-13 | 13 | LRADS-13 | 13 |
| LRAS-14 | 14 | LRADS-14 | 14 |
| LRAS-15 | 15 | LRADS-15 | 15 |
| LRAS-16 | 16 | LRADS-16 | 16 |
| LRAS-17 | 17 | LRADS-17 | 17 |
| LRAS-18 | 18 | LRADS-18 | 18 |
| LRAS-19 | 19 | LRADS-19 | 19 |
| LRAS-20 | 20 | LRADS-20 | 20 |
| LRAS-21 | 21 | LRADS-21 | 21 |
| LRAS-22 | 22 | LRADS-22 | 22 |
| LRAS-23 | 23 | LRADS-23 | 23 |
| LRAS-24 | 24 | LRADS-24 | 24 |
| LRAS-25 | 25 | LRADS-25 | 25 |
| LRAS-26 | 26 | LRADS-26 | 26 |
| LRAS-27 | 27 | LRADS-27 | 27 |
| LRAS-28 | 28 | LRADS-28 | 28 |
| LRAS-29 | 29 | LRADS-29 | 29 |
| LRAS-30 | 30 | LRADS-30 | 30 |

| MODELS | Top of Chain |
|---------|--------------|
| DC-60 | - |
| DCEZ-60 | - |
| DC-63 | - |
| DCEZ-63 | - |
| DC-82 | - |
| DCEZ-82 | - |
| DC-83 | - |
| DCEZ-83 | - |

| INTERMEDIATE / TAIL | | | INTERMEDIATE / TAIL | | | DRIVE AND TAIL | | |
|---------------------|-----|-----|---------------------|-----|-----|----------------|-----|-----|
| Support | MIN | MAX | Support | MIN | MAX | Support | MIN | MAX |
| DCS-01 | 11 | 12 | DC3S-01 | 11 | 12 | --- | --- | --- |
| DCS-02 | 13 | 15 | DC3S-02 | 13 | 15 | --- | --- | --- |
| DCS-03 | 15 | 17 | DC3S-03 | 15 | 17 | DCDS-03 | 16 | 18 |
| DCS-04 | 17 | 19 | DC3S-04 | 17 | 19 | DCDS-04 | 17 | 19 |
| DCS-05 | 19 | 21 | DC3S-05 | 19 | 21 | DCDS-05 | 19 | 21 |
| DCS-06 | 21 | 23 | DC3S-06 | 21 | 23 | DCDS-06 | 21 | 23 |
| DCS-07 | 23 | 25 | DC3S-07 | 23 | 25 | DCDS-07 | 23 | 25 |
| DCS-08 | 25 | 27 | DC3S-08 | 25 | 27 | DCDS-08 | 25 | 27 |
| DCS-09 | 27 | 29 | DC3S-09 | 27 | 29 | DCDS-09 | 27 | 29 |
| DCS-10 | 29 | 31 | DC3S-10 | 29 | 31 | DCDS-10 | 29 | 31 |

| MODELS | Top of Slat |
|--------|-------------|
| SL | - |

| DRIVE | | INTERMEDIATE/TAIL | |
|---------|----------|-------------------|----------|
| Support | NON-ADJ. | Support | NON-ADJ. |
| SLS-25 | 25 | SLS-25 | 25 |
| SLS-26 | 26 | SLS-26 | 26 |
| SLS-27 | 27 | SLS-27 | 27 |
| SLS-28 | 28 | SLS-28 | 28 |
| SLS-29 | 29 | SLS-29 | 29 |
| SLS-30 | 30 | SLS-30 | 30 |
| SLS-31 | 31 | SLS-31 | 31 |
| SLS-32 | 32 | SLS-32 | 32 |
| SLS-33 | 33 | SLS-33 | 33 |
| SLS-34 | 34 | SLS-34 | 34 |
| SLS-35 | 35 | SLS-35 | 35 |
| SLS-36 | 36 | SLS-36 | 36 |
| SLS-37 | 37 | SLS-37 | 37 |
| SLS-38 | 38 | SLS-38 | 38 |
| SLS-39 | 39 | SLS-39 | 39 |
| SLS-40 | 40 | SLS-40 | 40 |
| SLS-41 | 41 | SLS-41 | 41 |
| SLS-42 | 42 | SLS-42 | 42 |

| MODELS | Top of Roller |
|-------------------|---------------|
| 36 CRRH, 36-CREZD | 5-3/8 |
| 36 SR - Set High | 5-3/8 |
| 36 SR - Set Low | 4-1/4 |

| Support | NON-ADJ. | Support | NON-ADJ. |
|---------|----------|---------|----------|
| HSF-09 | 4 | HSF-20 | 14-5/8 |
| HSF-10 | 4-5/8 | HSF-21 | 15-5/8 |
| HSF-11 | 5-5/8 | HSF-22 | 16-5/8 |
| HSF-12 | 6-5/8 | HSF-23 | 17-5/8 |
| HSF-13 | 7-5/8 | HSF-24 | 18-5/8 |
| HSF-14 | 8-5/8 | HSF-25 | 19-5/8 |
| HSF-15 | 9-5/8 | HSF-26 | 20-5/8 |
| HSF-16 | 10-5/8 | HSF-27 | 21-5/8 |
| HSF-17 | 11-5/8 | HSF-28 | 22-5/8 |
| HSF-18 | 12-5/8 | HSF-29 | 23-5/8 |
| HSF-19 | 13-5/8 | HSF-30 | 24-5/8 |



| MODELS | Top of Roller |
|-------------------|---------------|
| 36 CRRH, 36-CREZD | 5-3/8 |
| 36 SR - Set High | 5-3/8 |
| 36 SR - Set Low | 4-1/4 |

| Support | NON-ADJ. | Support | NON-ADJ. |
|---------|----------|---------|----------|
| HSF-09 | 4 | HSF-20 | 14-5/8 |
| HSF-10 | 4-5/8 | HSF-21 | 15-5/8 |
| HSF-11 | 5-5/8 | HSF-22 | 16-5/8 |
| HSF-12 | 6-5/8 | HSF-23 | 17-5/8 |
| HSF-13 | 7-5/8 | HSF-24 | 18-5/8 |
| HSF-14 | 8-5/8 | HSF-25 | 19-5/8 |
| HSF-15 | 9-5/8 | HSF-26 | 20-5/8 |
| HSF-16 | 10-5/8 | HSF-27 | 21-5/8 |
| HSF-17 | 11-5/8 | HSF-28 | 22-5/8 |
| HSF-18 | 12-5/8 | HSF-29 | 23-5/8 |
| HSF-19 | 13-5/8 | HSF-30 | 24-5/8 |

| MODELS | Top of Chain |
|---------|--------------|
| CT-3000 | 12 |
| CT-4000 | 14 |

| Support | NON-ADJ. |
|---------|----------|
| CTS-01 | 1 |
| CTS-02 | 2 |
| CTS-03 | 3 |
| CTS-04 | 4 |
| CTS-05 | 5 |
| CTS-06 | 6 |

| MODELS | Top of Belt/Roller/Conveyor |
|-----------|-----------------------------|
| A - Drive | 11-1/4 |
| A - Tail | 4-1/2 |

| Support | DRIVE | | Support | DRIVE AND TAIL | |
|---------|----------|----------|---------|----------------|---------|
| | MIN | MAX | | MIN | MAX |
| RSAD-01 | 15 | 16-7/16 | MSAT-01 | 11-1/2 | 13-1/4 |
| RSAD-02 | 16-7/16 | 17-7/8 | MSAT-02 | 12-1/2 | 14-1/4 |
| RSAD-03 | 17-11/16 | 19-7/16 | MSAT-03 | 13-1/2 | 15-1/4 |
| RSAD-04 | 18-11/16 | 20-7/16 | MSAT-04 | 14-1/2 | 17-1/2 |
| RSAD-05 | 19-11/16 | 21-7/16 | MSAT-05 | 17-1/8 | 20-1/8 |
| RSAD-06 | 20-11/16 | 23-11/16 | MSAT-06 | 20-1/8 | 26-1/8 |
| RSAD-07 | 23-3/16 | 26-3/16 | MSAT-07 | 24-1/8 | 30-1/8 |
| RSAD-08 | 26-3/16 | 32-3/16 | MSAT-08 | 28-1/8 | 40-1/8 |
| RSAD-09 | 30-3/16 | 36-3/16 | MSAT-09 | 38-1/8 | 50-1/8 |
| RSAD-10 | 34-3/16 | 46-3/16 | MSAT-10 | 50-1/8 | 62-1/8 |
| RSAD-11 | 44-3/16 | 56-3/16 | MSAT-11 | 62-1/8 | 74-1/8 |
| RSAD-12 | 56-3/16 | 68-3/16 | MSAT-12 | 74-1/8 | 86-1/8 |
| RSAD-13 | 68-3/16 | 80-3/16 | MSAT-13 | 84-1/8 | 96-1/8 |
| RSAD-14 | 80-3/16 | 92-3/16 | MSAT-14 | 96-1/8 | 108-1/8 |
| RSAD-15 | 90-3/16 | 102-3/16 | - | - | - |
| RSAD-16 | 102-3/16 | 114-3/16 | - | - | - |

| MODELS | Top of Belt/Roller/Conveyor |
|--------|-----------------------------|
| R | 11-1/4 |


| Support | MIN | MAX | Support | MIN | MAX |
|---------|----------|----------|---------|----------|----------|
| RSR-01 | 13-1/8 | 14-9/16 | RSR-09 | 28-5/16 | 34-5/16 |
| RSR-02 | 14-9/16 | 16 | RSR-10 | 32-5/16 | 44-5/16 |
| RSR-03 | 15-13-16 | 17-9/16 | RSR-11 | 42-5/16 | 54-5/16 |
| RSR-04 | 16-13-16 | 18-9/16 | RSR-12 | 54-5/16 | 66-5/16 |
| RSR-05 | 17-13/16 | 19-9/16 | RSR-13 | 66-5/16 | 78-5/16 |
| RSR-06 | 18-13/16 | 21-13-16 | RSR-14 | 78-5/16 | 90-5/16 |
| RSR-07 | 21-5/16 | 24-5/16 | RSR-15 | 88-5/16 | 100-5/16 |
| RSR-08 | 24-5/16 | 30-5/16 | RSR-16 | 100-5/16 | 112-5/16 |



Casters are easily bolted to conveyor floor supports for portable applications. Steel or rubber wheels available in either rigid or swivel type.


4 in. Caster

- 4 in. dia. steel or rubber wheel
- Swivel or rigid
- Load height-5-5/8 in.
- Swivel radius-3-9/16 in.
- Available with brakes or floor locks

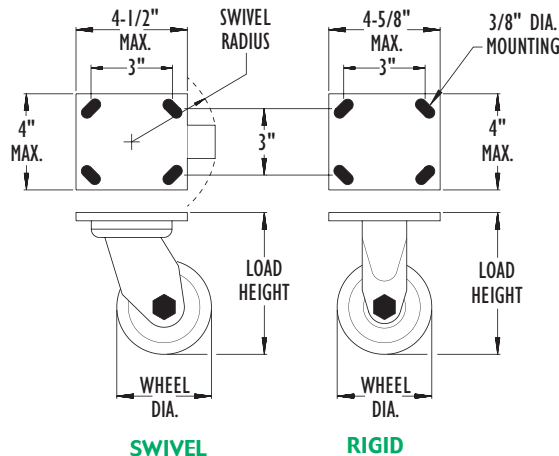

Caster shown with optional Brake. Available with Swivel Caster only. 4 in. Caster shown.

NOTE: Casters can limit overall capacity of conveyor.

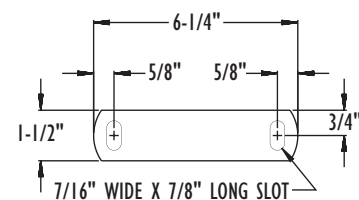

FOOT PLATE FOR FLOOR SUPPORT

6 in. Caster

- 6 in. dia. steel or rubber wheel
- Swivel or rigid
- Load height-7-1/2 in.
- Swivel radius-5 in.
- Available with brakes or floor locks



Caster shown with optional Floor Lock.

