

Date: \_\_\_\_\_

ALECO® Quote Number: \_\_\_\_\_

Account Number: \_\_\_\_\_

Sold To: \_\_\_\_\_

Address: \_\_\_\_\_

Purchase Order #: \_\_\_\_\_

Ship To: \_\_\_\_\_

Address: \_\_\_\_\_

Special Markings/Instructions: \_\_\_\_\_

Quantity: \_\_\_\_\_ **Single** **Bi-Parting**

*\*Please check only one.*

Finished Opening: \_\_\_\_\_" W X \_\_\_\_\_" H

**ABS FACING COLOR SELECTION: (check one)**

**White (Standard)**      **Black (Standard)**

**Custom ABS Color Options:**

Dove Gray	Fieldstone Gray	Royal Red
Leather Brown	Dutch Chocolate	Desert Beige
Marine Blue	Canyon Blue	

**DOOR FEATURES & OPTIONS:**

**Bumpers:**

NONE  
Tear-Drop (48" Wide)  
Standard

**Bumper Size (check one):**

12" Height	36" Height
18" Height	42" Height
24" Height	48" Height

**ABS Wear Panel** (Enter desired height. Panel will be width of door. Wear panel required for doors that exceed 96" high.)

NONE \_\_\_\_\_" Height

**ABS Wear Panel Color**

(Enter desired Wear Panel color.) \_\_\_\_\_

**Window Options:**

Dual Pane, Flush Mounted; 1/8" Thick Polycarbonate (Standard)

14" x 16" (Standard Size)  
22" x 22"

NONE

Dual Pane, Rounded Corners, Set in Black Rubber Gasketing (Optional)

9" x 14" (Standard Size)  
9" x 30"  
14" x 16"

**For Pressure and Wind Loads:**

Fixed Spring Assist Kit

Adjustable Spring Assist Kit (Aluminum 1-5/16" Bottom Bearing and 11-1/8" Jamb Guard Cover is Required with Adjustable Spring Kit)

NONE

**Full Perimeter Air Seals:**

Yes      No

**Stainless Steel - 20 GA:**

Push Plates 4" x 12"	Kick Plates:	24 inch	36 inch
-------------------------	--------------	---------	---------

**Casted V-Cam Hinge:**

1-1/2" Rise 90 x 90 Degree (Standard Hinge)  
3/4" Rise 90 x 90 (Opt.)  
1-1/2" Rise 90 x 180 Degree (Opt.)

**Lower Hinge:**

1-5/16" Plastic Bottom Bearing (Stand.)  
1-5/16" Aluminum Bottom Bearing (Opt.)  
4" Casted Combination Bottom Bearing/Jamb Guard (Opt.)  
11-1/8" Jamb Guard Cover (Opt.)

**Weld Plates:**

Yes      No




by E.S. ROBBINS

**IMPACDOR® FD-175**

Specifications: 1-3/4" Thick, Insulated

**IMPORTANT:** Provide measurements using the illustration below.

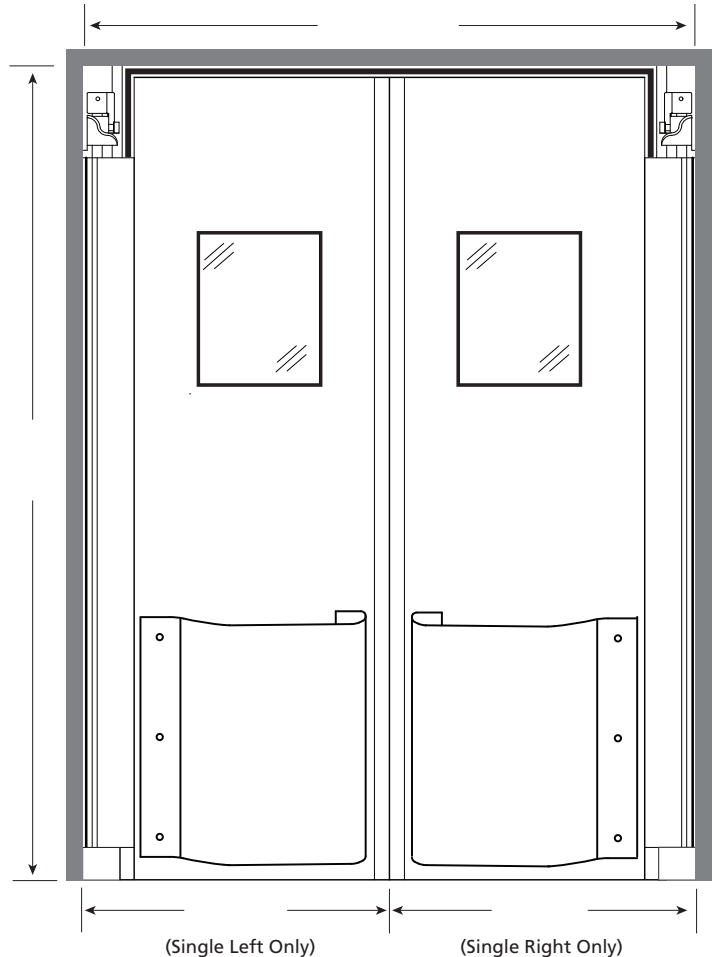

**Note: Door Frame (shaded portion) not included.**

**IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION**

Sign Here

*I have reviewed the specifications and authorize ALECO® to begin immediate manufacturing of ImpacDor® FD-175. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_

Phone: \_\_\_\_\_

**SPECIAL OPTIONS / NOTES**