



# BESTREACH

## RIGID DRIVE OUT BELT CONVEYOR

### DETAILS

#### ERGONOMIC CONTROLS

Designed with safety in mind, operators have access to all controls from the front of the conveyor.

#### GUIDE TRACK

Guide track assists the operator in extending and retracting the conveyor out from underneath the feed system. The track also provides a place for the igus energy chain to lay safely.

#### LARGE SOLID TIRES

The solid rubber tires will never go flat, and allows for ease of use over uneven floors and dock plates.

#### RETROFIT OPTIONS

Optional accessories include fans, lights, and guard rails all designed to improve efficiency and boost ergonomics.

The BESTREACH rigid belt drive out conveyor is designed to reach from your permanent conveyor all the way into your trailer with ease. It is equipped with a 1.5 hp gear motor for extension and the 16" large solid rubber tires never go flat and easily move over uneven floors and dock plates.

The BESTREACH rigid belt drive out conveyor is built with a one piece structural channel base that can handle a maximum live load of 1000 pounds at any given time. It is made with an all steel construction that withstands punishing conditions and hard impacts during the shipping and receiving process.



# BESTREACH

## RIGID DRIVE OUT BELT CONVEYOR

### STANDARD SPECIFICATIONS

LOAD CAPACITY	100 lbs/ft
MAX LIVE LOAD	1000 lbs
BELT MOTOR	2 hp
BELT WIDTH	24 / 30 in
BELT TYPE	2 Ply PVC
BELT SPEED	60 fpm (Variable 60-135 fpm Optional)
TRAVERSING MOTOR	1.5 hp gear motor
TRAVERSING SPEED	60 fpm
LEFT TO RIGHT STEERING	7 - 10 degrees
CONVEYOR WIDTH	35.4 / 39.5 in
CONVEYOR LENGTH	38.5 in
IN-FEED HEIGHT	28.4 in
DISCHARGE HEIGHT	25 - 29.5
TIRES	16 in Solid Rubber
POWER	480 / 230 VAC
INTERLOCK SIGNALS	Full Line Signal & Emergency Stop



LARGE SOLID TIRES




ERGONOMIC CONTROLS



GUIDE TRACK FOR IGUS CHAIN



MAIN PANEL

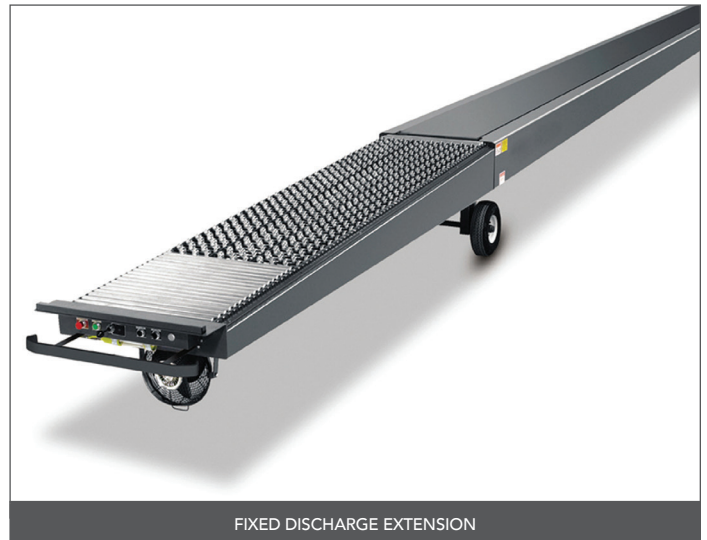

FIXED DISCHARGE EXTENSION

### MORE DETAILS

#### OPTIONS

Pull Out Extension / Fixed Extension  
Indexing optic package  
Side guard rails on loader mainframe

#### ACCESSORIES

Herringbone Transition  
Wheel guards  
Fan  
Light  
Fused Electrical disconnect

#### WARRANTY

ELECTRICAL: 12 Months  
MECHANICAL: 24 Months

#### SERVICES AVAILABLE

Technical Support  
Installation & Service  
Preventative & Routine Maintenance  
Application Support  
Operator & Maintenance Training



FMH CONVEYORS IS A MEMBER OF THE **DURAVANT** FAMILY OF COMPANIES

PACKAGING SOLUTIONS | FOOD PROCESSING SOLUTIONS | MATERIAL HANDLING SOLUTIONS | SUPPORTPRO