

# Rollback Safety Gate

## Meets OSHA Requirements

1910.29(b), 1926.502(b) and ANSI 6.4.4

Protect workers on elevated access points for material transfer. The gate is easy-to-use and install and protects without hindering productivity. A two-gate system means one gate is always closed and OSHA compliant fall protection is in place.

### Features

- Prevents falls from elevated access loading points while transferring material loads.
- Heavy-duty chains and roller tracks ensure long life and smooth operation.
- Counteracting gates create a safe zone for loading/unloading areas.
- When the inboard gate is opened, leading edge gate automatically closes.
- Adjustable rails to accommodate unforeseen job site conditions.
- Models available to accommodate single or multiple pallet loading.



## Why Choose Garlock?

- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- 100+ Years of Industry Experience
- Full Passive Fall Protection Portfolio
- Custom Engineered Products Available



# Features



Gate closed on inboard side. Gate open on leading edge side. Place pallet into receiving area.



As inboard gate is opened, leading edge gate automatically closes.




As inboard gate fully opens, leading edge gate is fully closed maintaining fall compliance.



Zinc plated tracks and hardware.



Integrated toe-board on leading edge gate.

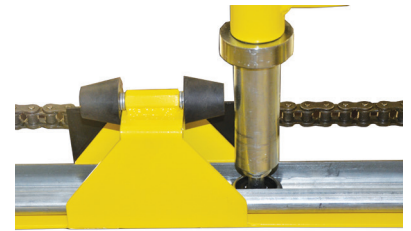

HD rubber gate stops.

# Specifications

Description	Pallet Capacity**	Outside Dimensions			Loading Zone Dimensions		
		L	W	H	L	W	H
301348-6060	(1) wide, (1) deep	70"	70"	108"	60"	60"	84"
301348-7260	(1) wide, (1) deep	82"	70"	108"	72"	60"	84"
301348-9660	(2) wide, (1) deep	106"	70"	108"	96"	60"	84"
301348-10860	(2) wide, (1) deep	118"	70"	108"	108"	60"	84"
301348-60102	(1) wide, (2) deep	70"	112"	108"	60"	102"	84"
301348-72102	(1) wide, (2) deep	82"	112"	108"	72"	102"	84"
301348-96102	(2) wide, (2) deep	106"	112"	108"	96"	102"	84"
301348-108102	(2) wide, (2) deep	118"	112"	108"	108"	102"	84"

\* Due to continuous improvement, specifications are subject to change without notice.

\*\* Std. 48"x 48" pallet used for Pallet Capacity calculation.

- Tracks and hardware zinc plated.
- Gates are Powder coated Yellow.
- Top Rail Height = 42"
- Lower Rail Height = 20"
- Custom sizes also available.

**GARLOCK**  
SAFETY SYSTEMS