


138-LRS

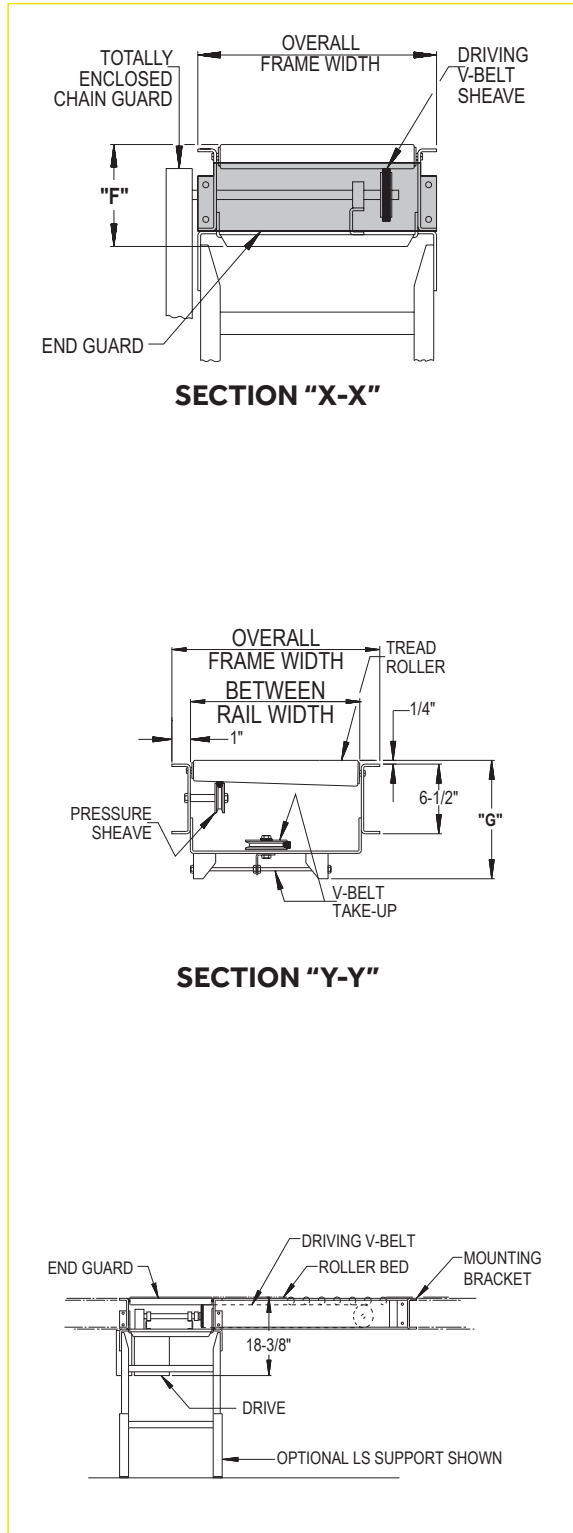


138-LRS

Spur Applications

Live Roller Spurs are used to transfer cartons, etc., onto and off of main conveyor lines. The illustrations below show the correct usage of plows and turning wheels with spurs in diverging and converging applications.


DIVERGING

30° is most desirable transfer angle.

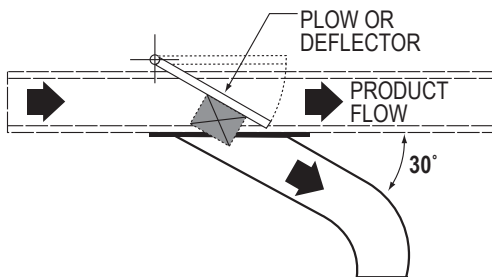


CONVERGING

Both 30° and 45° are desirable transfer angles.

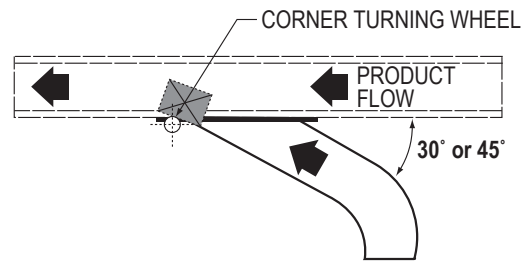


MOUNTING BRACKET

The 138-LRS is equipped with mounting brackets to attach unit to side channel of 138-ACC.

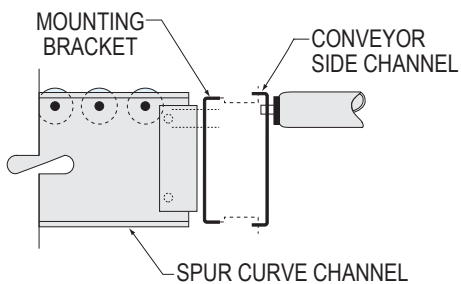

SPUR FLOW (Specify)

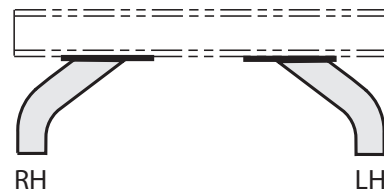

138-LRS

Standard Specifications

BED – Roller bed with 1 3/8 in. dia. roller x 18 ga. galvanized tube and 5/16 in. HRS hex shafts (12 in. through 18 in. OAW) and 2 1/2 in. dia. tapered to 1 11/16 in. dia. roller x 16 ga. galvanized tube and 1.9 in. dia. straight rollers x 16 ga. galvanized tube 7/16 in. HRS hex shafts (24 in. OAW). Mounted in 6 1/2 in. x 12 ga. powder-painted formed steel channel frame.

END DRIVE – Mounted underneath bed section on outside radius.

DRIVING BELT – Endless B-section v-belt, industrial grade.

PRESSURE SHEAVES – 2 1/2 in. dia. with 3/8 in. bore.

IDLER SHEAVE – 4 in. dia. x 5/8 in. bore v-type and/or 5 1/2 in. dia. x 5/8 in. bore flat type.

TAKE-UP – Take-up provided to maintain proper v-belt tension. Includes 4 3/8 in. dia. x 5/8 in. bore v-type take-up sheave.

BEARINGS – Pre-lubricated, self-aligning ball bearings in tread rollers. Flange and pillow block bearings are sealed, pre-lubricated with eccentric lock collar.

MOUNTING BRACKET – Bracket is supplied to attach spur to side channels of 138-ACC conveyor.

BUTT COUPLINGS – Standard for connecting 138-ACC and 138-LRC.

SPEED REDUCTION – Sealed worm gear reducer, driven by v-belt. No. 50 roller chain to drive sheave.

MOTOR – 1/2 HP, 208/230/460/575V, 3 PH. 60 Hz. Totally enclosed.

CONVEYING SPEED – Constant 65 FPM.

CAPACITY – 150 lbs. total distributed live load.

FLOOR SUPPORTS – Supplied as optional equipment.

Optional Equipment

FLOOR SUPPORTS – LS Type floor supports are available with a wide range of adjustment. Specify top of belt or roller elevation. One support required at every bed joint and ends of conveyor. Holes in feet for lagging to floor. Knee braces recommended above LS-6 support.

CONVEYING SPEED – Other constant and variable speeds from 25 to 120 FPM. Note: Capacity affected with speed change.

END DRIVE – Mounted on inside radius. Minimum elevation: 18 7/8 in.

SIDE MOUNTED DRIVE – Motor-reducer unit mounted to side of conveyor. Specify inside or outside. Minimum elevation: 11 1/16 in.

O-RING DRIVE CHAIN – With sealed-in lubricant (recommended for applications that do not permit regular lubrication).

GUARD RAILS – Adjustable Universal Channel Guard Rail, fixed channel, type A or B angle. See Accessory section. Note: If product comes in contact with guard rails, product flow will be affected.

POLY-TIER SUPPORTS – 36 in. to 120 in. support heights in 6 in. increments. Knee braces supplied.

CEILING HANGER – 5/8 in. dia. x 8 ft. long unplated rods fully threaded. Other lengths and galvanized rods available.

SLAVE-DRIVEN – Standard drive may be omitted and curve slave-driven from 138-ACC (specify by sketch, location of slave connection). Minimum elevation: 10 1/2 in.

MOTOR – Energy efficient, single phase, brakemotor, other characteristics. 1/2 HP maximum.

ELECTRICAL CONTROLS – Non-reversing or reversible magnetic starters and push-button stations. AC variable frequency drive.