

# 199-CRR

## Chain Driven Live Roller Conveyor


The model 199-CRR is a medium-duty chain driven live roller conveyor. The roll-to-roll chain drive makes this conveyor ideal for light- to medium-duty pallet handling or oily conditions which are not suitable for belt-driven live roller.

- 11 Bed Widths
- Center Drive
- Reversible
- Chain Driven Rollers
- Adjustable MSN-Type Floor Supports Available




Conveyor shown with optional floor supports.

<b>Conveying Surface</b>	12 1/4"	14 1/4"	16 1/4"	18 1/4"	20 1/4"	22 1/4"	24 1/4"	28 1/4"	30 1/4"	34 1/4"	36 1/4"
<b>Between Rail Width</b>	15"	17"	19"	21"	23"	25"	27"	31"	33"	37"	39"
<b>Overall Frame Width</b>	18"	20"	22"	24"	26"	28"	30"	34"	36"	40"	42"
<b>Base Weight</b>	655	680	705	730	755	780	805	855	880	930	955
<b>Weight (lbs.) Per Foot 4" Roller Centers</b>	51	53	55	57	59	61	63	67	69	72	75
<b>Weight (lbs.) Per Foot 6" Roller Centers</b>	46	47	49	51	52	54	55	59	60	63	65

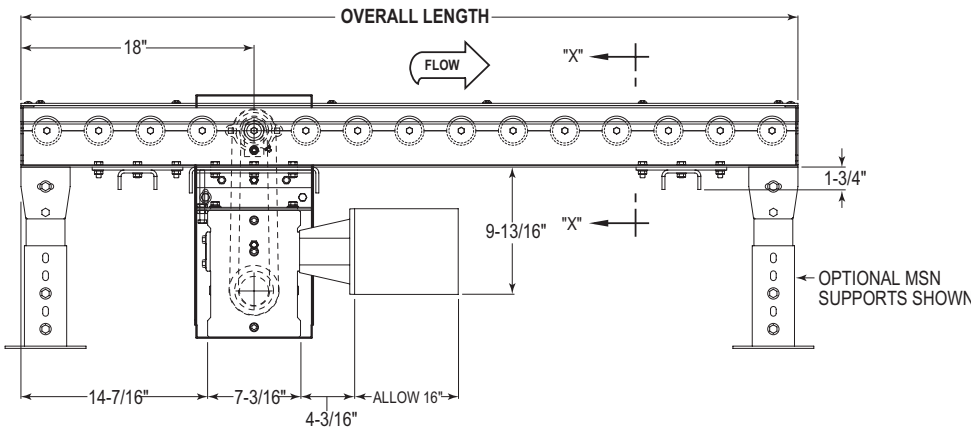

Chain guard removed to illustrate roll-to-roll drive chain. **WARNING:** Do not operate conveyor with chain guard removed.

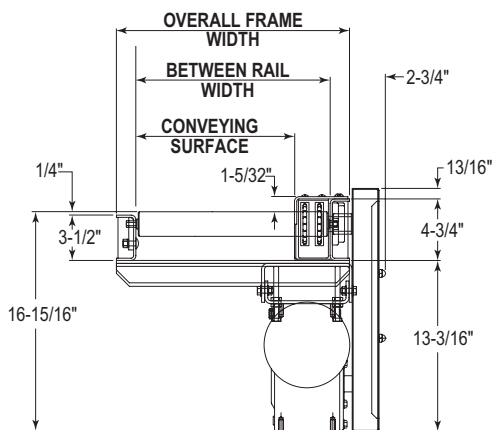

**SECTION X-X**

Load Capacity Chart @ 35 FPM and 6" Roller Centers								
Overall Width	18" - 28"				30" - 42"			
	25'	50'	25'	50'				
Support Centers	5'	10'	5'	10'	5'	10'	5'	10'
	1/2	2250	2250	1250	1250	2000	2000	1000
1	5000	3750	3250	3250	5000	3750	3000	3000
2	6250	3750	7250	7250	6250	3750	7000	7000

# 199-CRR

## Standard Specifications

**BED** – Roller bed with 1.9 in. x 9 ga. wall unplated tread rollers spaced every 4 in. or 6 in. mounted in 7 ga. powder-painted formed steel channel frame bolted together with butt couplings.

**CENTER DRIVE** – Mounted underneath bed section.

**ROLLER CHAIN** – No. 40 roller-to-roller chain.

**MOTOR DRIVE CHAIN** – No. 60 chain.

**CHAIN GUARD** – Mounted to top of channel frame to totally enclose drive chain.

**BEARINGS** – Sealed, pre-lubricated ball bearings on drive roller shaft.

**SPEED REDUCTION** – Sealed worm gear C-face speed reducer.

**MOTOR** – 1/2 HP, 208/230/460/575V, 3 Ph. 60 Hz. Totally enclosed C-face.

**CONVEYING SPEED** – Constant 35 FPM.

**CAPACITY** – Maximum load per linear foot of conveyor: 150 lbs. with supports on 10 ft. centers, 250 lbs. per ft. with supports on 5 ft. centers and 4 in. roller centers. NOT TO EXCEED capacity in charts.

**FLOOR SUPPORTS** – Supplied as optional equipment.

## Optional Equipment

**FLOOR SUPPORTS** – MSN Type floor supports are available with a wide range of adjustment. Specify top of belt or roller elevation. One support required at every bed joint and ends of conveyor. Holes in feet for lagging to floor. Knee braces recommended above MSN-6 support.

**CONVEYING SPEED** – Other constant and variable speeds. Note: Capacity affected with speed change.

**SHAFT-MOUNTED DRIVE** – Requires shaft-mounted gearmotor. Minimum elevation top of rollers is 6 in.

**O-RING DRIVE CHAIN** – With sealed-in lubricant (recommended for applications that do not permit regular lubrication).

**ROLLERS SET LOW** – Tread rollers mounted in 4 3/4 in. x 7 ga. formed steel channel frame to form 1 in. high guard rails.

**CHAIN CROSSOVER** – Move driving chain from one side to opposite side.

**GUARD RAILS** – Adjustable Universal Channel Guard Rail (both sides), fixed channel (one side), or angle (one side). See Accessory section.

**POLY-TIER SUPPORTS** – 36 in. to 120 in. support heights in 6 in. increments. Knee braces supplied.

**CEILING HANGER** – 5/8 in. dia. x 8 ft. long unplated rods fully threaded. Other lengths and galvanized rods available.

**MOTOR** – Energy efficient, single phase, brakemotor. 2 HP maximum.

**ELECTRICAL CONTROLS** – Non-reversing magnetic starters and push-button stations. AC variable frequency drive.