



# ROLLER

Gravity Roller Conveyor  
 (1.9 in. Dia. x 16 Ga. Rollers)  
 (1.9 in. Dia. x 9 Ga. Rollers)

Over All Width	Between Rail Width	Model No.		Roller Centers	Weight (Lbs.)		Model No.		Roller Centers	Weight (Lbs.)	
		1.9" x 16 Ga.					1.9" x 9 Ga.				
		(Galvanized)					(Unplated)				
16"	13"	19GSR-13-2 1/4	2 1/4"	97	193	199SR-13-2 1/4	2 1/4"	122	239		
		19GSR-13-3	3"	83	159	199SR-13-3	3"	113	220		
		19GSR-13-4 1/2	4 1/2"	67	129	199SR-13-4 1/2	4 1/2"	87	170		
		19GSR-13-6	6"	60	113	199SR-13-6	6"	75	143		
18"	15"	19GSR-15-2 1/4	2 1/4"	105	210	199SR-15-2 1/4	2 1/4"	137	267		
		19GSR-15-3	3"	89	170	199SR-15-3	3"	126	244		
		19GSR-15-4 1/2	4 1/2"	71	137	199SR-15-4 1/2	4 1/2"	95	187		
20"	17"	19GSR-17-2 1/4	2 1/4"	113	226	199SR-17-2 1/4	2 1/4"	152	295		
		19GSR-17-3	3"	97	184	199SR-17-3	3"	139	267		
		19GSR-17-4 1/2	4 1/2"	77	147	199SR-17-4 1/2	4 1/2"	104	203		
22"	19"	19GSR-19-2 1/4	2 1/4"	121	242	199SR-19-2 1/4	2 1/4"	166	324		
		19GSR-19-3	3"	108	207	199SR-19-3	3"	151	292		
		19GSR-19-4 1/2	4 1/2"	85	163	199SR-19-4 1/2	4 1/2"	122	220		
24"	21"	19GSR-21-2 1/4	2 1/4"	129	258	199SR-21-2 1/4	2 1/4"	178	350		
		19GSR-21-3	3"	111	211	199SR-21-3	3"	161	313		
		19GSR-21-4 1/2	4 1/2"	87	168	199SR-21-4 1/2	4 1/2"	119	235		
		19GSR-21-6	6"	77	141	199SR-21-6	6"	101	193		
26"	23"	19GSR-23-2 1/4	2 1/4"	137	274	199SR-23-2 1/4	2 1/4"	194	381		
		19GSR-23-3	3"	118	229	199SR-23-3	3"	175	340		
		19GSR-23-4 1/2	4 1/2"	93	179	199SR-23-4 1/2	4 1/2"	129	254		
28"	25"	19GSR-23-6	6"	81	152	199SR-23-6	6"	109	207		
		19GSR-25-2 1/4	2 1/4"	145	290	199SR-25-2 1/4	2 1/4"	208	409		
		19GSR-25-3	3"	126	241	199SR-25-3	3"	167	363		
30"	27"	19GSR-25-4 1/2	4 1/2"	97	187	199SR-25-4 1/2	4 1/2"	137	270		
		19GSR-25-6	6"	85	158	199SR-25-6	6"	116	219		
		19GSR-25-9	9"	73	129	199SR-25-9	9"	94	169		
		19GSR-25-12	12"	64	117	199SR-25-12	12"	80	148		
34"	31"	19GSR-27-2 1/4	2 1/4"	153	307	199SR-27-2 1/4	2 1/4"	224	438		
		19GSR-27-3	3"	133	255	199SR-27-3	3"	200	387		
		19GSR-27-4 1/2	4 1/2"	102	196	199SR-27-4 1/2	4 1/2"	146	287		
36"	33"	19GSR-27-6	6"	89	166	199SR-27-6	6"	122	232		
		19GSR-31-2 1/4	2 1/4"	169	340	199SR-31-2 1/4	2 1/4"	252	493		
		19GSR-31-3	3"	146	278	199SR-31-3	3"	224	433		
		19GSR-31-4 1/2	4 1/2"	112	214	199SR-31-4 1/2	4 1/2"	162	319		
40"	37"	19GSR-31-6	6"	97	179	199SR-31-6	6"	135	257		
		19GSR-33-2 1/4	2 1/4"	177	356	199SR-33-2 1/4	2 1/4"	267	524		
		19GSR-33-3	3"	154	292	199SR-33-3	3"	237	460		
		19GSR-33-4 1/2	4 1/2"	117	224	199SR-33-4 1/2	4 1/2"	171	337		
42"	39"	19GSR-33-6	6"	101	187	199SR-33-6	6"	143	271		
		19GSR-37-2 1/4	2 1/4"	193	389	199SR-37-2 1/4	2 1/4"	295	579		
		19GSR-37-3	3"	164	311	199SR-37-3	3"	261	506		
		19GSR-37-4 1/2	4 1/2"	124	238	199SR-37-4 1/2	4 1/2"	188	369		
44"	41"	19GSR-37-6	6"	108	198	199SR-37-6	6"	156	296		
		19GSR-39-2 1/4	2 1/4"	201	405	199SR-39-2 1/4	2 1/4"	308	606		
		19GSR-39-3	3"	173	328	199SR-39-3	3"	272	528		
		19GSR-39-4 1/2	4 1/2"	130	250	199SR-39-4 1/2	4 1/2"	195	384		
		19GSR-39-6	6"	112	207	199SR-39-6	6"	162	307		

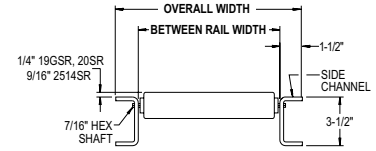

SET HIGH



SET LOW

**NOTE:** All Standard Widths to be Offered in 1 ft. Length Increments - 1 Week Stockyard

## • STANDARD SPECIFICATIONS

**WIDTHS**—Between Rail Width: 13 in., 15 in., 17 in., 19 in., 21 in., 23 in., 25 in., 27 in., 31 in., 33 in., 37 in., and 39 in.

**FRAME**—3 1/2 in. or 4 1/2 in. deep x 1 1/2 in. flange x 10 ga. powder painted formed steel channel with bolt-in cross members.

**BUTT COUPLINGS**—Bolt-on type for bolting sections together.

**LENGTHS**—5 ft. and 10 ft. straight sections.

**ROLLERS**—19-GSR 1.9 in. dia. x 16 ga. galvanized steel tubing; 199-SR 1.9 in. dia. x 9 ga. unplated steel tubing. Bearings are labyrinth sealed and grease packed.

**AXLES**—7/16 in. hex shaft, spring loaded.

**CAPACITY**—See Load Capacity Chart this page.

LOAD CAPACITY CHART			
Support Centers	Frame Capacity (Lbs.) Max. Distributed Live Load Per Foot 620	Roller Capacity (Lbs.) Max. Load Per Roller	
		19GSR	199SR
5'	620	210	250
10'	118		

