


LiftPlus®

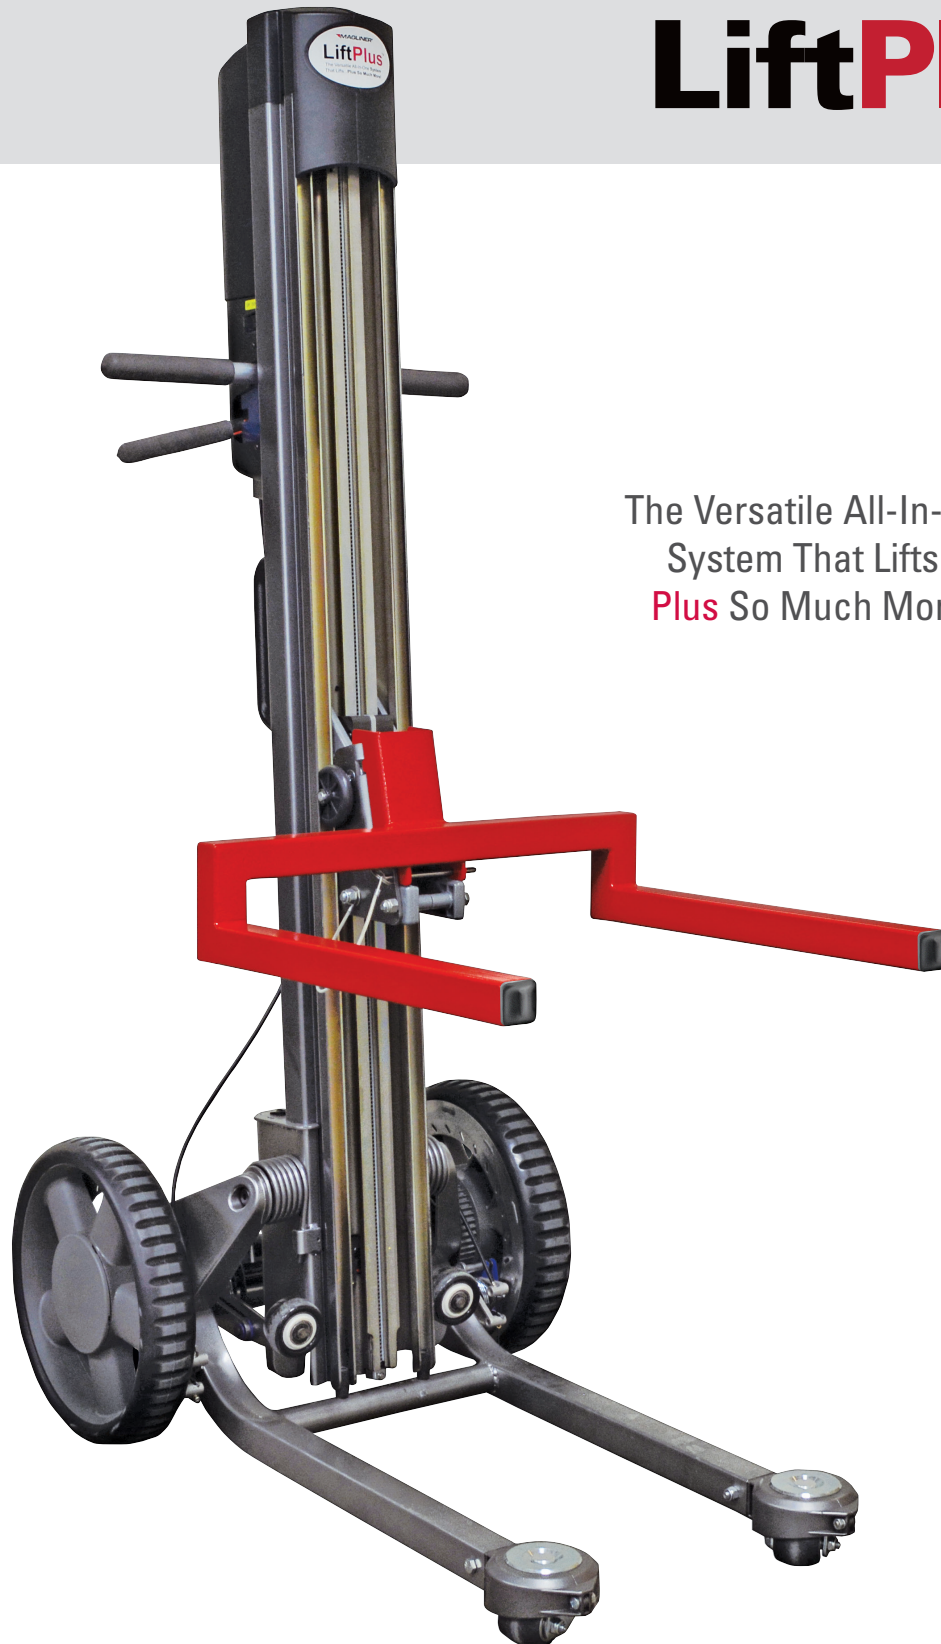


The Versatile All-In-One
System That Lifts...
Plus So Much More!

INCREASE PRODUCTIVITY AND REDUCE JOB-RELATED INJURIES WITH THIS ALL-IN-ONE STACKER, TRANSPORTER, AND POSITIONER.

- Minimizes bending and stretching
- Narrow footprint fits through most doorways and tight spaces; no fork truck required
- Provides variable height work surface
- Supports diverse loading requirements
- Electric screw drive lift system provides smooth, quiet operation
- Quick change adapter allows easy changes between attachments
- Up to 350 lb. lifting capacity (120 lb. on high-speed models)
- Lifts 2"/second (4"/second on high-speed models)
- Easy to operate; no certification required; see instructional video on magliner.com

SPECIFICATIONS			
	48" Model	60" Model	72" Model
Attachment height (fully lifted)	48"	60"	72"
Attachment height (fully lowered)	3.5"	3.5"	3.5"
Overall height	60"	72"	84"
Overall depth	37"	37"	37"
Weight (base unit)	101 lbs.	108 lbs.	114 lbs.
High speed option	Yes	Yes	No
Battery capacity (median load)	125-150 lift cycles when fully charged		
Overall width (14" chassis)	25"	25"	N/A
Overall width (25" chassis)	33"	33"	33"
Chassis width	14" or 25"	14" or 25"	25"

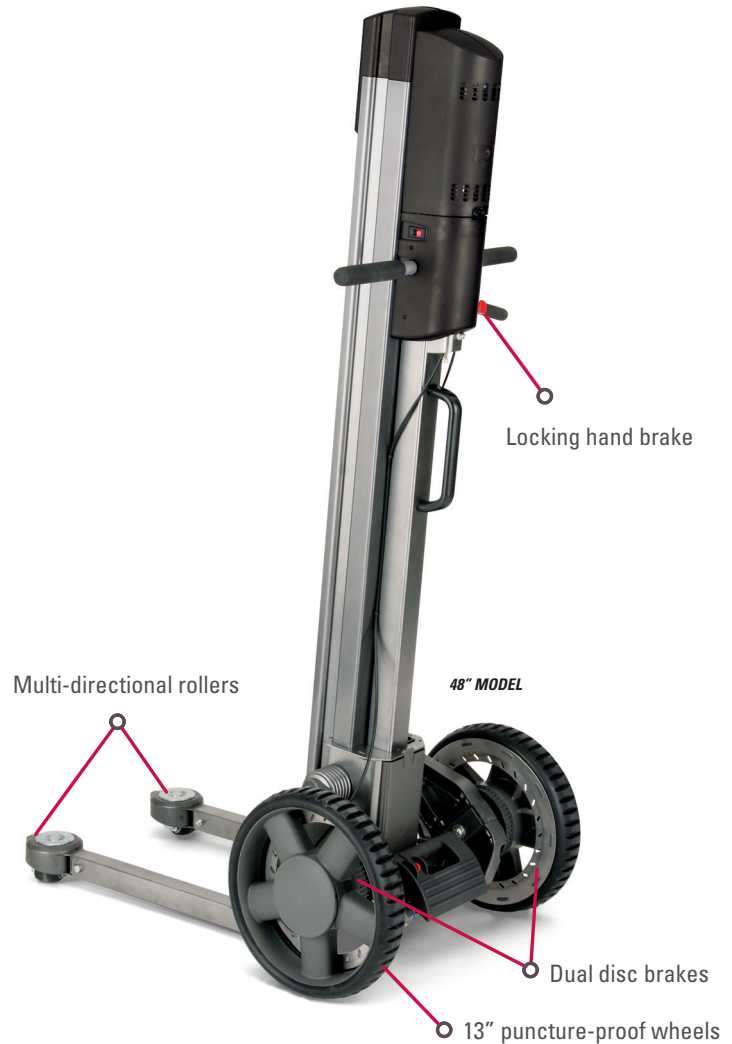

ONE SYSTEM. MANY TOOLS.

Quickly handle a variety of tasks with the LiftPlus.

WORK BENCH



P/N	W"	L"	WT.(LBS.)
536017	18	18	23.5

Platform length expands up to 28".
Work clamps, vice, handle, and
load-securing back bar included.


BENT FORK



P/N	W"	L"	WT.(LBS.)
536044	21	18	12.5

3.5" height from floor.
Available with 14" chassis only.

STRAIGHT FORKS



P/N	W"	L"	WT.(LBS.)
536053	18.5	18.5	11.0
536048	20	32	16.0
536060	21	18	11.5

5" height from floor.

V-TRAY



P/N	W"	L"	WT.(LBS.)
536054	19	24.5	10.0

Accommodates cylindrical products
4" to 24" (requires 536053 fork
attachment).

PAIL LIFTER



P/N	D"	L"	WT.(LBS.)
536093	14	16	11.0

Accommodates three 5-gallon pails.
Hook height adjustable 3" to 34" high
from top of forks.

ARBOR



P/N	D"	L"	WT.(LBS.)
536039	1.5	24	7.5

Accommodates rolled material.

BOOM AND CHAIN



P/N	D"	L"	WT.(LBS.)
536088	1.875	24	5.5

Adjustable boom plus chain/hook
assembly (requires 536039 arbor
attachment).

Have a special application?

Call us today to discuss
a custom attachment.

STEEL PLATFORMS



P/N	W"	L"	WT.(LBS.)
536025	24	24	15.5

Requires 536044 or 536060
fork attachment.



P/N	W"	L"	WT.(LBS.)
536033	34	34	30.0

Requires 536048 fork attachment.



P/N	W"	L"	WT.(LBS.)
536103	21.5	19	30.0

Requires 536060 fork attachment.
18" W x 17.75" L usable surface in
center.
Available with 25" chassis only.

Options and Accessories

ERGO HANDLE



P/N	WT.(LBS.)
532128	5.25

Three-position handle provides additional grip points for increased comfort and maneuverability.

TOTE BAG



P/N
534500

Use the tote bag to store the remote and work bench accessories securely on the unit.

BATTERY CHARGER



P/N
63027

External battery charger allows you to charge an extra battery while the lift truck is in use to reduce downtime.

REMOTE



P/N
534200

Tethered remote allows user to actuate lifting and lowering up to 6' away.

ONE SYSTEM. MANY TOOLS.

