



SAFESTOP BOLLARD 15

INNOVATIVE, INDUSTRIAL
SAFETY BOLLARDS KEEP
YOUR PEOPLE SAFE

THE MCCUE DIFFERENCE

HI, WE'RE MCCUE & WE MAKE SAFETY EASY!

Our innovative, impact-tested bollards safely stop moving material handling vehicles — protecting your people and your facility. With engineered materials that work together, we're revolutionizing safety barrier innovation with these three principles:



SUPERIOR STRENGTH

Designed to bring heavy machinery to a safe stop.



ENERGY ABSORPTION

Absorbs impacts to keep your people and your operations safe.



EASY INSTALL

Simple 4-anchor install with standard hardware and tools.

Shock-absorbing
base provides
ultimate stopping
power

**KEEP YOUR OPERATIONS SAFE AND YOUR WORKFORCE SAFER
WITH THE WORLD'S MOST ADVANCED SAFETY BARRIERS**





SAFER STOPS: ○
Bollard absorbs impact energy and attenuates shock to keep your people and equipment safe.

IMPACT
ENERGY >>>

CLEAN FINISH: ○
Internal hardware means no catching points, not to mention better looks!

EASY INSTALLATION: ○
With 4 concrete anchors, SafeStop Bollards are easy to install and relocate.

ULTIMATE STRENGTH: ○
A proprietary blend of synthetic elastomer and high strength steel absorbs impact energy.

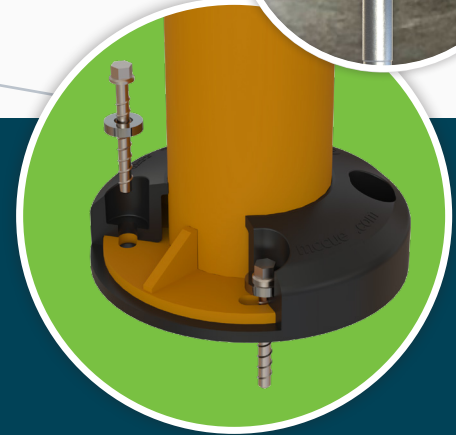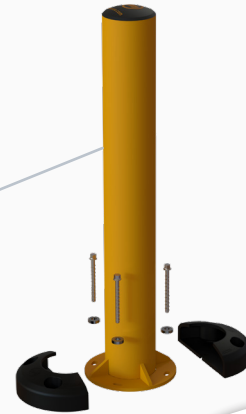

SAFESTOP BOLLARD 15

Meet **SafeStop Bollard 15**, our impact-absorbing bollard engineered to stop heavy equipment. **SafeStop Bollard 15** safely absorbs and withstands impacts up to 15,000 J, keeping your people safe and your facility damage-free.

INTENDED *USES*



RACK PROTECTION



DOOR & WALL PROTECTION




MACHINERY PROTECTION

* PATENTS PENDING



IMPACT TESTING

Rigorous product testing at the highest standard.

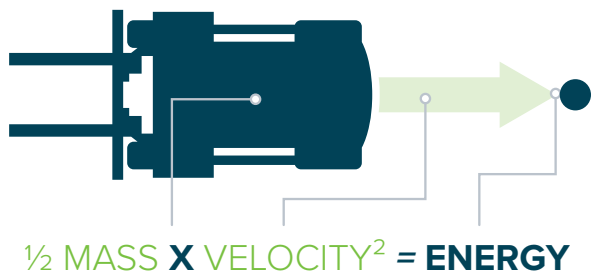

Ultimate Strength Rating
11,064 ft-lbs (15,000 J)


x

8,755 lbs
(3971 kg)

6.15 mph
(9.89 kmh)

90°	11,064 ft-lbs	15,000 J	45°	15,649 ft-lbs	21,217 J	30°	22,127 ft-lbs	30,000 J
-----	---------------	----------	-----	---------------	----------	-----	---------------	----------

WHAT DOES 11,064 FT LBS (15,000 J) MEAN TO YOU?

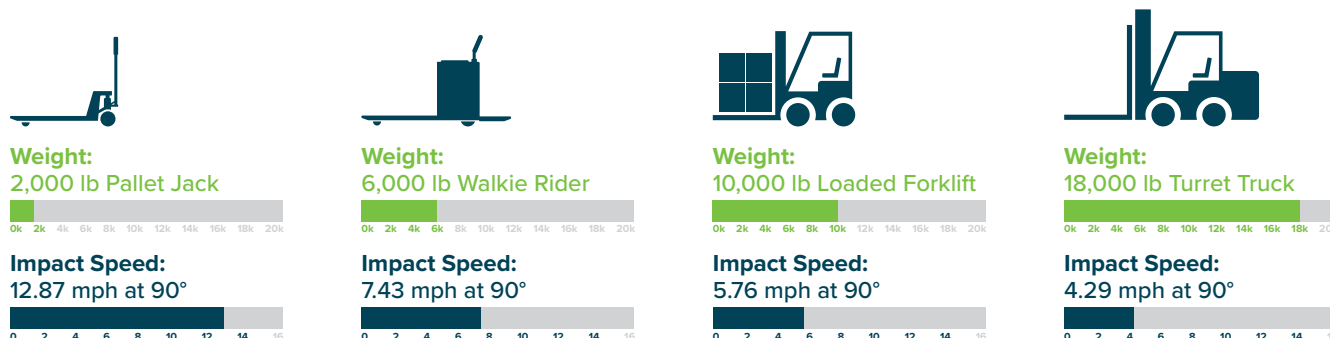


MATERIAL PROPERTIES

BOLLARD DEFLECTION: The bend but don't break mentality.



Anchor Specifications:

The shock-absorbing anchor system protects the anchors and the floor.



	Working Temperatures	-20°F to 130°F (-29°C to 54°C)
	Toxicity	Not Hazardous

	Flammability	Does Not Easily Ignite
	REACH / RSCA / DSL	Compliant

* PATENTS PENDING




SAFESTOP **BOLLARD 15**


SafeStop Bollard 15

PART NUMBER: B15-K-048-307


Hardware included.

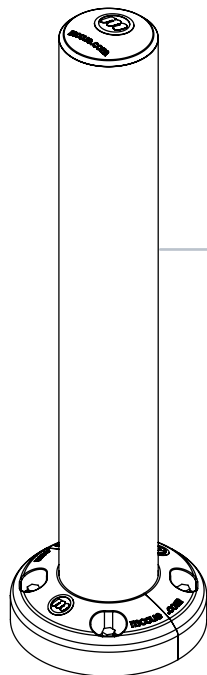



15 KJ SHOCK ABSORBING
BOLLARD
PART NUMBER: B15-K-048-307

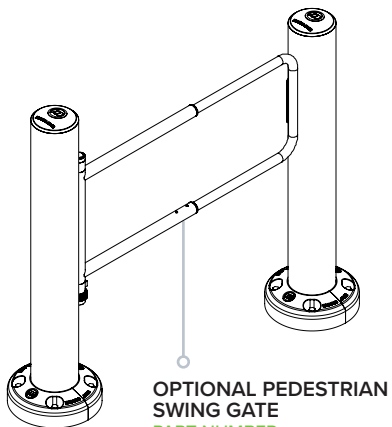


OPTIONAL PEDESTRIAN
SWING GATE
PART NUMBER:
SSA-K-PSG



OPTIONAL SPINNER
PART NUMBER:
SSA-K-SPN

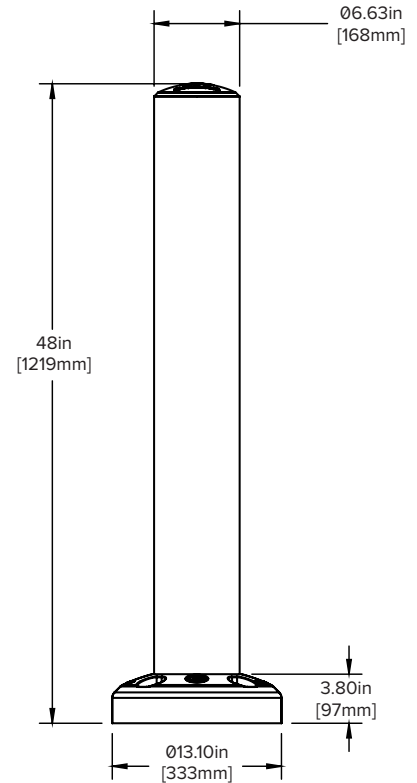

HOLE PATTERN
SCALE 1:8

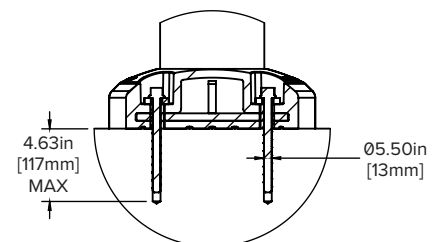

* PATENTS PENDING