Clients include:

ABBOTT LABORATORIES

AMAZON.COM

AMWAY

CARDINAL HEALTH

CIRCUIT CITY

CSK AUTO

CVS

DELL COMPUTERS

DOW CHEMICAL

FIRMENICH, INC.

FREGUSON ENTERPRISES

FRITO LAY

THE GAP

GENERAL MOTORS

GILLETTE

HENKEL ADHESIVES


HOME DEPOT

IKEA

M & M MARS

MCGRAW-HILL

MCKESSON

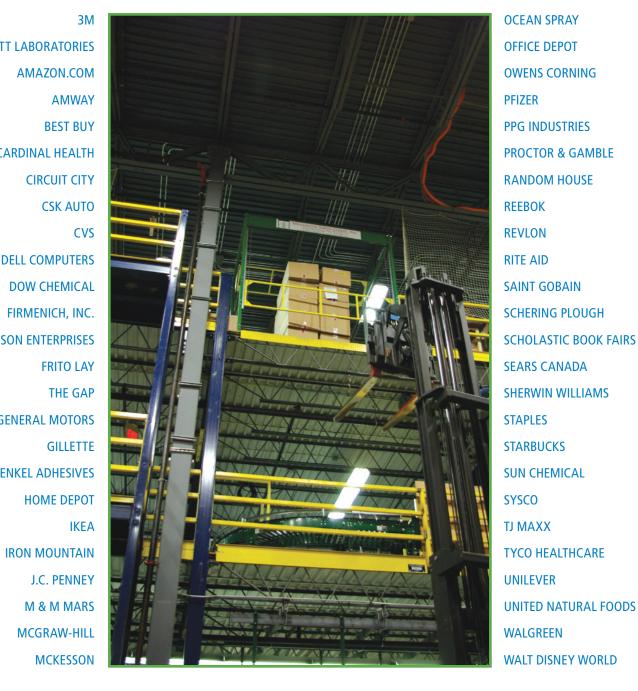

Mezzanine Safeti-Gates, Inc.

www.MezzanineSafetyGates.com



An OPEN and SHUT Case for Plant Mezzanine Safety

Roly Safeti-Gate the highest degree of protection.









ezzanine safety gates secure the ledges of pallet drop areas on mezzanines and high-bay rack picking modules. Our patented safety gate designs use dual, counterbalanced gates, interconnected so one gate is always in place, securing the ledge a gate at the ledge and a second gate behind the pallet, our safety

at all times. With fixed side rails, gates create controlled-access areas, maintaining a permanent proactive safe environment. swing gates, sliding gates, and chains will often leave a pallet

Single-barrier systems such as drop area unguarded. Singlebarrier systems require someone to make an effort to secure the area, so as a result, the area is often left unguarded. Dual-gate systems will always maintain a safe environment, even while pallets are being loaded or

unloaded. Our dual-gate safety systems are available in standard sizes and can be modified to fit virtually any

pallet drop application.

Dual, counterbalanced gate system with heavy-duty chain & sprocket drive system, secures handrail and doorway openings on elevated platforms. Available in standard sizes as well as custom widths, depths and heights. Manually operated with optional power operation with push-button station and radio-frequency remote. Self-supported structure consisting of fixed posts and fixed side rails. Available with four-inch toe boards.

Rack Supported Gate

Pallet Rack Integration

Rack Supported version of Roly Model safety gate, attaches to existing rack components in high-bay picking module and rack-supported mezzanines. Economical solution that utilizes existing components to maximize space. Fits all brands of pallet rack. Available in custom sizes with manual or power operation.

Pivot

Few Moving Parts

Dual-gate system interconnected with pivoting framework. Manual operation. Moving portions consist of only two pivot points, ideal for use in hostile environments. Available in standard powder-coated finish or electro polished stainless steel. Available in standard and custom widths. Accommodates pallets up to 54" tall. Free-standing design.

High Pallet Pivot

Accommodates Tall Palletts

Pivoting framework with dual-gate system, utilizes fourteen pivot points to accommodate pallet loads up to 80" tall. Available powder-coated or electro polished stainless steel, ideal for hostile environments with tall pallet loads, Standard and custom widths. Free-standing design.

Tri-Side

Three-Sided Pallet Access

Designed for: Pallet drop areas located in walkways, near reactors/hoppers or where pallets need to be accesses from three sides. Dual-gate system uses single gate at ledge and three-piece gate on rearside of unit. When the ledge-side gate is closed, the three-side rear gate is raised allowing access to the pallets from three sides. This unit takes up only fourteen inches (14") of depth when the ledge is closed. Available in manual or power operation.


Pallet Flow Swing Gate


Flow Lane Integration

Roly

Versitile Solution

Self-closing swing gate designed for pallet flow lanes. A fork truck pushes the gates open with the pallet. Once the pallet flows into the system, heavy-duty, tension-adjustable hinges immediately close the gates in a smooth, controlled operation. Gates serve as a fixed barrier for employees on ledge, as gates do not swing outward. Available in a free-standing design that gets lagged down to the deck or in a rack-supported design that attaches to existing pallet rack. Available in single and multilane bays.






High Pallet Open Top

No Overhead Mechanics

Counterbalanced gate system interconnected on the sides of the unit to allow access overhead with a crane or chain hoist. Also, because there is no overhead mechanics there is no pallet load height restriction. Two-rail gate system on ledge compacts in the open position to maximize space. Single lever in back of unit secures ledge at all times. Available in custom widths and depths.



Mezzanine Safeti-Gates, Inc.

(978) 768-3000 • FAX (978) 768-1101 E-mail: Sales@MezzanineSafetyGates.com www.MezzanineSafetyGates.com

An OPEN and **SHUT** Case for Plant Mezzanine Safety.