

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

## Enclosed Pan Racks

### Clean, High Volume Storage Cabinet

Ideal cabinet for food delivery and storage. Formed door and rear panel create a chimney effect allowing air to circulate freely from top to bottom. Solid side panels are composed of interlocking aluminum extrusions with guides spaced on 1½" centers for maximum capacity. Units are secured with heavy duty tie rods of 7/8" square tube.

### Easy to Maneuver

Equipped with four 5" or 6" platform swivel type heavy duty casters with non-marking wheels, these all welded aluminum carts can be loaded up and easily rolled into place.

### Sanitary

Each unit is all welded with all seams fully welded and sealed providing a smooth, easy to clean surface. No cracks or crevices to trap dirt!

### Guaranteed Dependable

All units carry a Lifetime Guarantee against rust and corrosion as well as a Five-Year Guarantee against material defects and workmanship.

**NSF Certified.**



#1290



#1290PP

*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*



Distributed by:

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

## Enclosed Pan Racks

**CONSTRUCTION:**

Heavy duty, high tensile, extruded aluminum. Type 6063-T5 alloy.

**UPPER FRAME & TOP:**

The upper frame is constructed of vertical uprights 1" x 2½" x ⅛" thick extruded aluminum channels with top cross and side bracing of ¼" x ½" x ⅛" wall extruded aluminum channel, all fully welded together. A solid cap of .063" thick aluminum is welded to uprights and cross bracing.

**COMPOUND GUIDES:**

The compound guides are interlocking solid wall type, extruded aluminum panels. Each panel has a series of guides spaced ½" on center, with ½" ledges and .090" wall thickness. The guides are welded to the vertical uprights.

**REAR PANEL:**

Rear panel is .080" thick aluminum panel with a corrugation on each side for strength and enhanced air circulation. Panel is welded to the top, bottom, and rear vertical uprights.

**DOOR:**

Door consists of ⅛" thick aluminum panel with a corrugation on each side. The door is supported by three stainless steel hinges designed to provide 270° door swing. A positive gravity catch is provided to retain door in a closed position. A universal card holder is bolted to the upper front of the door.

**TIE ROD:**

A ⅞" square wall extruded aluminum tube tie rod is welded to the front vertical uprights for extra rigidity. Model #1291 uses two tie rods, one at each end.


**BOTTOM FRAME:**

Bottom frame is constructed of ⅛" thick aluminum sheet with four sides bent down 1⅜", all corners welded smoothly. Tubular framework welded inside the ⅛" aluminum sheet for extra rigidity. Caster plates (2¾" x 4" thick pre-tapped) are welded to bottom of frame.

**CASTERS:**

Four platform type 5" or 6" casters, full swivel design with sealed ball bearing axle and non-marking wheels.

**NSF Certified.**

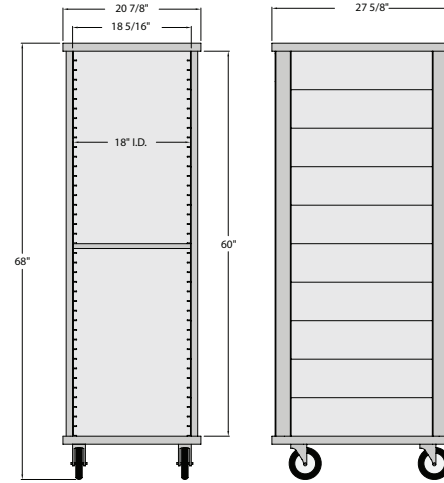

Model No.	Size W-H-D	Casters	Pan Cap.	H.D. Base	Ship Lbs.
<b>½-Size Enclosed Pan Rack — 1-½" Runner Spacing</b>					
1296	20⅞" x 38" x 27⅝"	5" (#C450)	20	No	72
<b>¾-Size Enclosed Pan Rack — 1-½" Runner Spacing</b>					
1293	20⅞" x 56" x 27⅝"	5" (#C450)	32	Yes	106
<b>Full Size Enclosed Pan Rack — 1-½" Runner Spacing</b>					
1290	20⅞" x 68" x 27⅝"	5" (#C450)	40	Yes	113
1292*	20⅞" x 69" x 27⅝"	6" (#C510)	38	Yes	137
<b>Solid Sides, Open Ends, Solid Top &amp; Bottom — 1-½" Spacing</b>					
1291	20⅞" x 68" x 27⅝"	5" (#C450)	40	Yes	79
<b>Solid Sides, Open Ends, Top &amp; Bottom — 1-½" Runner Spacing</b>					
96328	20⅝" x 69⅓" x 26½"	5" (#C450)	39	N/A	65

**Casters:**

#C450 = 5" x 1⅜" polyurethane platform type swivel caster.  
 #C510 = 6" x 2" polyolefin platform type swivel caster.

\* Equipped With A Reinforced Door — Standard

Units hold 13" x 18", 14" x 18", and 18" x 26" pans by the lip.  
 Note: Pan widths cannot exceed 17⅞" (+/- ⅛")

**Options:**

"B", "MD" (excluding #1292), "PB", "CL(B)", "CL(C)" -- See price list for details.

Clear Polycarbonate Door - Add "CD" suffix to model #.

Open Door Latch - Add "DL" suffix to model #.

Reinforced Door - Add "RD" suffix to model #.

Note: #1292 comes equipped with a reinforced door - standard.

Prison Package - Add "PP(B)" suffix to model # (#1290, #1293, & #1296 only).

(4) Welded Hinges

(4) 6" Casters (#C510)

(2) Padlock Holes In Door

(+) Extra Interior Bracing

(+) Tamper-Proof Screws & Bolts

\*\*\* 38 Pan Capacity \*\*\*

Distributed by:

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.

