

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

## Enclosed Pan Racks

### Clean, High Volume Storage Cabinet

Ideal cabinet for food delivery and storage. Formed door and rear panel create a chimney effect allowing air to circulate freely from top to bottom. Solid side panels are composed of interlocking aluminum extrusions with guides spaced on 1½" centers for maximum capacity. Units are secured with heavy duty tie rods of 7/8" square tube.

### Easy to Maneuver

Equipped with four 5" or 6" platform swivel type heavy duty casters with non-marking wheels, these all welded aluminum carts can be loaded up and easily rolled into place.

### Sanitary

Each unit is all welded with all seams fully welded and sealed providing a smooth, easy to clean surface. No cracks or crevices to trap dirt!

### Guaranteed Dependable

All units carry a Lifetime Guarantee against rust and corrosion as well as a Five-Year Guarantee against material defects and workmanship.

### NSF Certified.




#1290



#1290PP

*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*



Distributed by:

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

## Enclosed Pan Racks

### CONSTRUCTION:

Heavy duty, high tensile, extruded aluminum. Type 6063-T5 alloy.

### UPPER FRAME & TOP:

The upper frame is constructed of vertical uprights 1" x 2½" x ⅛" thick extruded aluminum channels with top cross and side bracing of ¼" x ½" x ⅛" wall extruded aluminum channel, all fully welded together. A solid cap of .063" thick aluminum is welded to uprights and cross bracing.

### COMPOUND GUIDES:

The compound guides are interlocking solid wall type, extruded aluminum panels. Each panel has a series of guides spaced 1½" on center, with ½" ledges and .090" wall thickness. The guides are welded to the vertical uprights.

### REAR PANEL:

Rear panel is .080" thick aluminum panel with a corrugation on each side for strength and enhanced air circulation. Panel is welded to the top, bottom, and rear vertical uprights.

### DOOR:

Door consists of ⅛" thick aluminum panel with a corrugation on each side. The door is supported by three stainless steel hinges designed to provide 270° door swing. A positive gravity catch is provided to retain door in a closed position. A universal card holder is bolted to the upper front of the door.

### TIE ROD:

A ⅞" square wall extruded aluminum tube tie rod is welded to the front vertical uprights for extra rigidity. Model #1291 uses two tie rods, one at each end.

### BOTTOM FRAME:

Bottom frame is constructed of ⅛" thick aluminum sheet with four sides bent down 1⅜", all corners welded smoothly. Tubular framework welded inside the ⅛" aluminum sheet for extra rigidity. Caster plates (2¾" x 4" thick pre-tapped) are welded to bottom of frame.



### CASTERS:

Four platform type 5" or 6" casters, full swivel design with sealed ball bearing axle and non-marking wheels.

### NSF Certified.



*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*

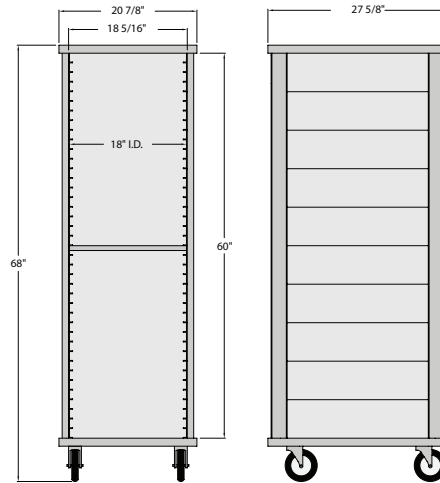

| Model No.   | Size W-H-D           | Casters    | Pan Cap. | H.D. Base | Ship Lbs. |
|---|----------------------|------------|----------|-----------|-----------|
| <b>½-Size Enclosed Pan Rack — 1-½" Runner Spacing</b>                 |                      |            |          |           |           |
| 1296  | 20⅞" x 38" x 27⅝"    | 5" (#C450) | 20       | No        | 72        |
| <b>¾-Size Enclosed Pan Rack — 1-½" Runner Spacing</b>                 |                      |            |          |           |           |
| 1293  | 20⅞" x 56" x 27⅝"    | 5" (#C450) | 32       | Yes       | 106       |
| <b>Full Size Enclosed Pan Rack — 1-½" Runner Spacing</b>              |                      |            |          |           |           |
| 1290  | 20⅞" x 68" x 27⅝"    | 5" (#C450) | 40       | Yes       | 113       |
| 1292*   | 20⅞" x 69" x 27⅝"    | 6" (#C510) | 38       | Yes       | 137       |
| <b>Solid Sides, Open Ends, Solid Top &amp; Bottom — 1-½" Spacing</b>  |                      |            |          |           |           |
| 1291  | 20⅞" x 68" x 27⅝"    | 5" (#C450) | 40       | Yes       | 79        |
| <b>Solid Sides, Open Ends, Top &amp; Bottom — 1-½" Runner Spacing</b> |                      |            |          |           |           |
| 96328   | 20⅝¼" x 69⅓¼" x 26½" | 5" (#C450) | 39       | N/A       | 65        |

### Casters:

#C450 = 5" x 1⅜" polyurethane platform type swivel caster.

#C510 = 6" x 2" polyolefin platform type swivel caster.

\* Equipped With A Reinforced Door — Standard

Units hold 13" x 18", 14" x 18", and 18" x 26" pans by the lip.

Note: Pan widths cannot exceed 17⅞" (+/- ⅛")

### Options:

"B", "MD" (excluding #1292), "PB", "CL(B)", "CL(C)" -- See price list for details.

Clear Polycarbonate Door - Add "CD" suffix to model #.

Open Door Latch - Add "DL" suffix to model #.

Reinforced Door - Add "RD" suffix to model #.

Note: #1292 comes equipped with a reinforced door - standard.

Prison Package - Add "PP(B)" suffix to model # (#1290, #1293, & #1296 only).

(4) Welded Hinges

(4) 6" Casters (#C510)

(2) Padlock Holes In Door

(+) Extra Interior Bracing

(+) Tamper-Proof Screws & Bolts

\*\*\* 38 Pan Capacity \*\*\*

Distributed by: