

22"

HIGH VELOCITY FAN



STANDARD
YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



RM Rack Mount

57 lbs



CW Column-Wall

62 lbs



PS Portable Stroller

85 lbs



PB Pedestal Base

61 lbs

SHIPPING WEIGHT:

| SIZE | CFM | HP | FAN DIMENSIONS | | | AIR THROW DISTANCE | SHIPPING WEIGHT |
|------|------|-----|----------------|-----|-------|--------------------|-----------------|
| | | | W | D | ID | | |
| 22" | 5570 | 1/2 | 29" | 16" | 22.5" | 100' | 49 lbs |

FEATURES

- Propeller:** 21" Diameter, 3 Blade GalvAlum, 19°
- Fan Inlet/Outlet:** High Impact Polypropylene
- Finger Guards:** OSHA Compliant, Spiral Wound Steel
- Power Cord (115V Only):** 12' Length (Switch Optional)
- RPM:** 1725
- Decibels:** 66.5 @ 20' - 77.6 @ 3'
- Coverage:** 3600 ft²


Warranty: 2 Years

MOTOR

| VOLTAGE | MOTOR AMPS | RUNNING AMPS |
|----------------|-------------|--------------|
| 115V/208-230V* | 6.0/3.0-2.9 | 5.9/2.9-2.8 |
| 208-230/460V | 2.4-2.3/1.2 | 2.3-2.2/1.1 |
| 277V | 1.85 | 1.75 |

- Enclosure:** TEAO Standard
- Frame:** 56
- Ambient Temperature:** 104°F
- Duty Cycle:** Continuous

*standard

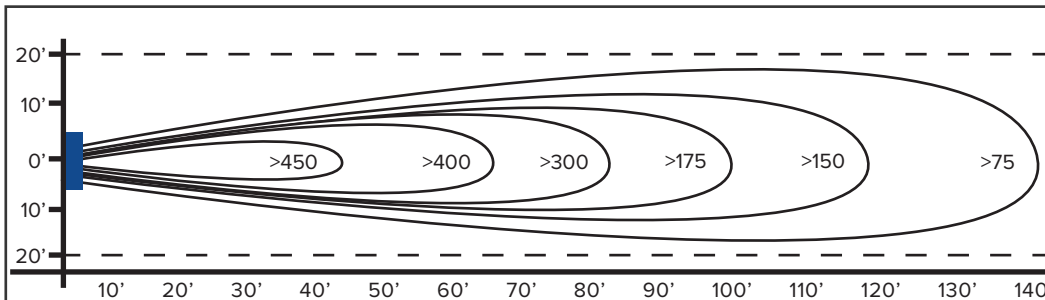

Above velocities shown in feet/minute.

AIR FLOW PATTERN