PortaMax

Xtra-Tall Wall Systems

With PortaMax Xtra-Tall modular walls, you can effectively divide your plant space – from floor to roof – or create free-standing inplant buildings taller and stronger than ever before possible with modular construction. PortaMax gives you exactly the enclosed space you need to control dust, temperature, humidity, noise, and other environmental needs. PortaMax is moveable, reusable, and designed to connect to either an overhead steel structure or as a self contained, freestanding structure with a roof deck.



Modular Flexibility


Nonprogressive construction allows for the easy removal of individual panels without disturbing adjacent panels. Just remove necessary wall sections to move equipment into completed units and replace in a fraction of the time needed in a conventionally built facility. Customized designs meet your exact room needs enabling you to interface easily with mechanical equipment and accommodate conveyor openings or pass-thrus. You save time and money in the future, as well as on your initial modular building investment.

Loadbearing Roof Wall System

A wall system designed to support any type of roof loading. Design criteria can include man loads, 2-story, roof-mounted HVAC and duct work, and storage loads. Please consult factory for specific needs.


Wiring Studs

Removable "snap-in" cover plates allow for wiring capabilities and easy inspection of raceways without affecting the structural integrity of the stud.



Steel Framing System

The PortaMax steel framing system comes in both 4-5/8" and 6" wall thicknesses to provide greater load bearing capabilities than aluminum. The studs feature a wire raceway stud on both sides that match the wall panel color.



Aluminum Framing System

The PortaMax 458 anodized aluminum components are ideal for achieving maximum cleanliness in a controlled environment. The studs feature removable snap in cover plates that allows for easy inspection of raceways.

Fire & Sound Panels

With Fire & Sound wall panels, PortaMax wall systems provide a Class A non-combustible rating, increased sound deadening, and thermal insulation.


- Provide a sound transmission coefficient (STC=31) rating that is ideal for areas where plant noise can be especially disruptive.
- Tested in accordance with ASTM E-84 to meet minimum flame spread of 5 and smoke density of 20. Panels conform to the 2000 International Building Code, section 2603.4 as is it relates to thermal barriers.
- Offer increase thermal value, an ideal option for thermal insulation in warehouse space with no or limited climate control.

Functionality

Increased wall heights allow you to create floor to roof systems or achieve specific clearance for machinery or ceiling plenums to conceal and house equipment. Wall panels feature a variety of core materials and panel finishes for meeting specific requirements for acoustic and thermal insulation, chemical resistance, and static control.





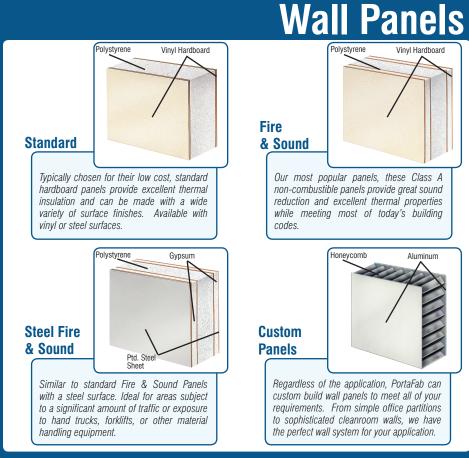

PortaMax Features

Heights:

- PortaMax 458: 24'
- PortaMax 600: 40'

Thickness

- PortaMax 458: 4 5/8"
- PortaMax 600: 6"

Loadbearing: Yes

Stud Construction: The PortaMax Series is available in both steel and aluminum systems to meet a wide variety of applications.

Colors: PortaMax 458A features anodized aluminum studs while PortaMax Steel systems come in champagne, gray, and white with custom colors available. With steel framework, trim and framing can match wall panel color choice fror a smooth monochromatic finish.

Re-Usable: Expandable and relocatable units are 100% re-usable and qualify for accelerated depreciation in most cases.

Easy to Install: Uncomplicated construction for quick and easy installation.

Adaptable: Modular construction allows for nearly any configuration – including 2-story, mezzanine, 2, 3, or 4 wall units.

Customizable: Windows and doors can be moved without disturbing adjacent panels or ceiling.

Doors: Heavy-duty, 20 gauge steel door with baked enamel finish and 18 gauge frame with mortised hinges, sweep, and key-in-knob lockset.

Windows: 1⁄4" thick clear tempered safety glass.

Base: Removable, screw-on, vinyl base.

PortaFab Corporation

18080 Chesterfield Airport Road Chesterfield, MO 63005 Tel: 1-800-325-3781 1-636-537-5555 Fax: 1-636-537-2955 e-mail: info@portafab.com www.portafab.com



© 2006 PortaFab Corporation