

# BEAM TRACTOR DRIVE






	TRAVEL SPEED						
	Opt.	Standard			Optional		
Capacity	12 FPM	35 FPM	50 FPM	75 FPM	100 FPM	150 FPM	200 FPM
2000 LBS	1/3 HP	1/3 HP	1/3 HP	1/3 HP	1/3 HP	1/2 HP	1/2 HP
4000 LBS	1/3 HP	1/3 HP	1/3 HP	1/3 HP	1/2 HP	3/4 HP	3/4 HP
6000 LBS	1/3 HP	1/3 HP	1/3 HP	1/2 HP	3/4 HP	3/4 HP	
8000 LBS	1/3 HP	1/3 HP	1/2 HP	3/4 HP	3/4 HP		
12000 LBS	1/3 HP	1/2 HP	3/4 HP	3/4 HP			
15000 LBS	1/3 HP	1/2 HP	3/4 HP	3/4 HP			

ISO 9001 REGISTERED

# BEAM TRACTOR DRIVE

- Can run on an I-beam or wide flange beam with lower flange from 3 1/4" to 8 1/2" with a 1" thick max.
- Navigates curves down to a 60" radius.
- Standard 230/460V, 3 phase power.
- Drive is rated for H3/Class "C" service.
- Available with an electric or air motor.
- Hardened flat tread wheels provided with all drives intended to operate on patented track.
- Optional features include explosion proof controls, spark resistant wheels, soft start, variable frequency drives, and many more.

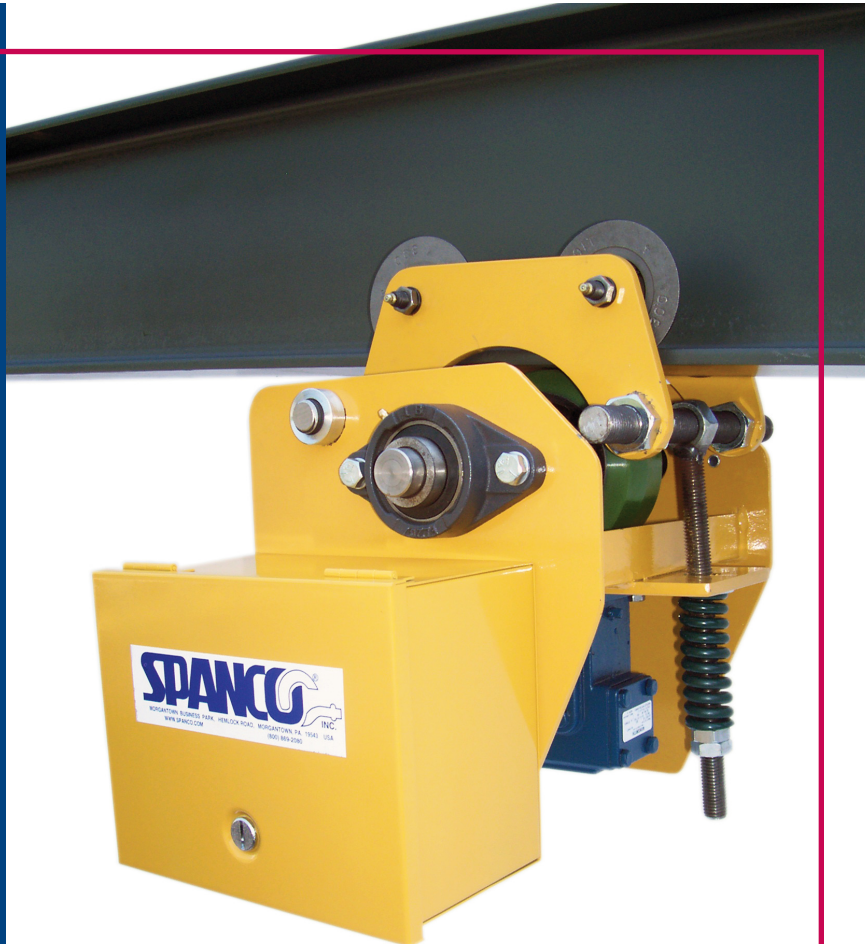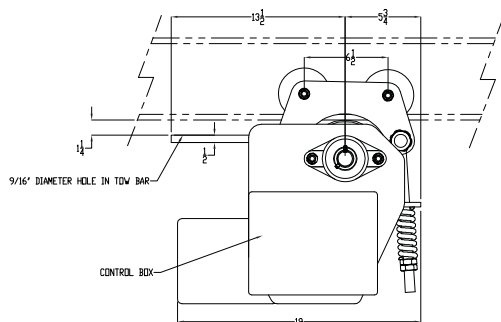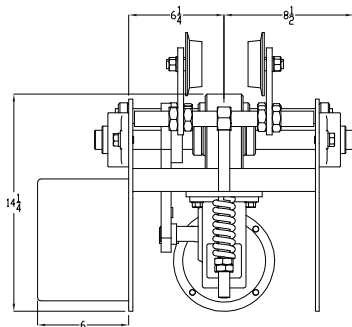

## SPANCO Beam Tractor Drive Features

Bring motorized power to your bridge crane or trolley hoist with a SPANCO Beam Tractor Drive. Primarily designed for indoor service, our beam tractor drive is available in three standard speeds with many optional features.

**Compliment your manually powered bridge crane or hoist trolley with a SPANCO Beam Tractor Drive.**

Call SPANCO with your custom inquiries.



604 Hemlock Road  
Morgantown, PA 19543 USA  
Tel: (610) 286-7200 Fax: (610) 286-0085  
1-800-869-2080 Canada & USA  
95-800-270-1080 Mexico

Visit SPANCO on the web: [www.spanco.com](http://www.spanco.com)

Email: [sales@spanco.com](mailto:sales@spanco.com)

Copyright © SPANCO, Inc. - Form BT09 - April 2009