






# 26-CRR

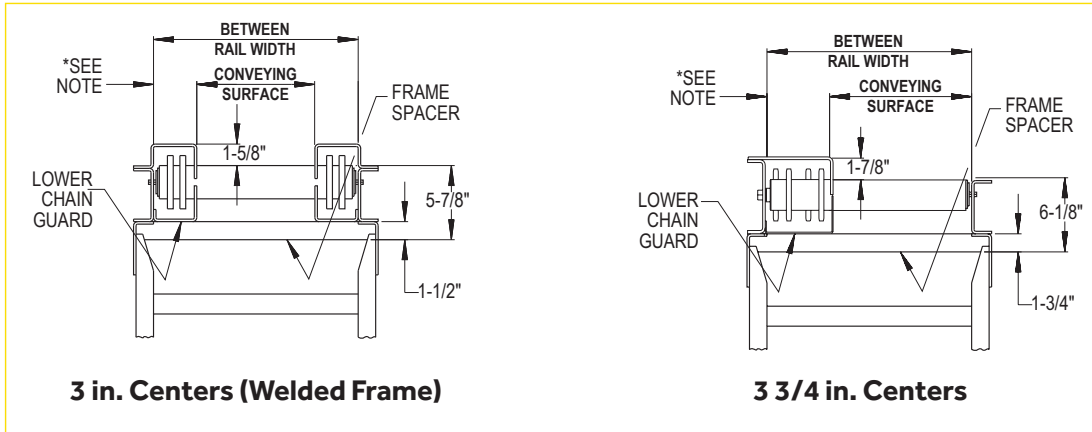

**\*Note:**  
 3 1/4 in. for 4 in., 5 in., 6 in., and 7 1/2 in. centers.  
 6 1/2 in. for 3 3/4 in. centers only.  
 3 1/4 in. on both sides for 3 in. centers.

Load Capacity Chart @ 30 FPM		
Total Load (lbs.)		
HP	Up to 50'	Up to 100'
1	9000	6000
2	22000	18000

**Note:** Capacities are calculated on 5 in. roller centers with #50 Chain.

# 26-CRR

## Standard Specifications

**BED** – Roller bed with 2 5/8 in. dia. x 7 ga. unplated tread rollers spaced every 4 in. with No. 40 roller chain; 5 in. with No. 50 roller chain. No. 60 roller chain used on 3 in., 3 3/4 in., 6 in., and 7 1/2 in. roller centers only. Tread rollers mounted in 4 in. x 4 ga. powder-painted formed steel channel on side opposite chain guard and 6 in. x 4 ga. powder-painted formed steel channel on chain guard side. Note: 3 in. roller center tread rollers mounted in 4 in. channel each side.

**CENTER DRIVE** – Can be placed in any section of conveyor length; specify. Chain guard located on left hand side.

**DRIVE CHAIN** – No. 40, 50, or 60 roller chain.

**CHAIN GUARD** – Formed steel; upper and lower chain guard mounted to top and bottom of channel frame to totally enclose drive chains.

**BEARINGS** – Sealed, pre-lubricated ball bearings.

**SPEED REDUCTION** – Sealed worm gear C-face speed reducer.

**MOTOR** – 1 HP, 208/230/460/575V, 3 Ph. 60 Hz. Premium Energy Efficient C-face.

**CONVEYING SPEED** – Constant 30 FPM.

**CAPACITY** – Maximum load per linear foot of conveyor 300 lbs. with supports on 10 ft. centers, 1000 lbs. with supports on 5 ft. centers. Contact factory for capacity of No. 40 chain, 4 in. roller centers. NOT TO EXCEED CAPACITY IN CHART.

**FLOOR SUPPORTS** – Supplied as optional equipment.

## Optional Equipment

**FLOOR SUPPORTS** – HSN Type floor supports are available with a wide range of adjustment. Specify top or roller elevation. One support required at every bed joint and ends of conveyor. Holes in feet for lagging to floor. Knee braces recommended above HSN-3 support.

**CONVEYING SPEED** – Other constant and variable speeds. V-belt supplied on speeds under 12 FPM (1 HP). Note: Capacity affected with speed change.

**TOP SIDE MOUNTED DRIVE** – Motor reducer unit mounted to side of conveyor with drive chain through top of chain guard. Specify clearances. Minimum elevation to top of rollers is 6 1/2 in.

**V-BELT DRIVE** – V-belt supplied between motor and reducer.

**SHAFT-MOUNTED DRIVE** – Mounted to side of conveyor complete with torque arm. Minimum elevation to top of rollers is 6 1/2 in.

**O-RING DRIVE CHAIN** – With sealed-in lubricant (recommended for applications that do not permit regular lubrication).

**FRAME** – 4 in. x 5.4 lb. structural channel (welded).

**GUARD RAILS** – Fixed angle (2 in. high x 1/4 in. steel) guard bolts to top flange of channel opposite chain guard.

**CHANNEL END STOP** – 6 in. x 8.2 lb. structural channel end stop.

**ROLLERS SET LOW** – Tread rollers mounted in 6 in. x 4 ga. formed steel channel frame to form 1 5/8 in. high guard rails. Also available in 5 in. x 6.7 lbs. structural channel frame (welded). Specify.

**CHAIN CROSSOVER** – Separate 3-roller section moves driving chain from one side of conveyor to other. Offset-style adds 12 in. to OAL of conveyor with No. 40 chain, 15 in. with No. 50 chain, and 18 in. with No. 60 chain.

**TRANSFERS** – Chain transfers available. See Accessory section.

**MOTOR** – Single phase, brakemotor, other characteristics. 2 HP maximum.

**ELECTRICAL CONTROLS** – Non-reversing magnetic starter with push-button stations. AC variable frequency drive.