

Lista 8000 Workstations



A.E. Petsche Co. relies on the flexibility of Lista 8000 workstations in its Arlington, TX assembly facility. The company builds connectors for cables used in aerospace and defense, and the ability to reconfigure their workstations to adapt to changing workflow was a key reason for selecting Lista 8000 workstations.

Lista 8000 Workstations



Lista 8000 Workstation Features	85
Lista 8000 Workstation Easy-Order Combinations	87
Build Your Own Lista 8000 Workstations	88
Build Your Own Lista 8000 Mobile Workstations	89
Lista 8000 Workstation Worksurfaces	90
Lista 8000 Workstation Accessories	91
Lista 8000 Workstation Shelves	91
Lista 8000 Workstation Utility Accessories	92
Lista 8000 Workstation Lighting	92
Lista 8000 Workstation Hanging Drawers	93
Lista 8000 Workstation Overhead Cabinets	93
Lista 8000 Workstation Panels and Markerboard/Tackboards	93
Lista 8000 Workstation Parts Bin Rails	94
Lista 8000 Workstation Tool and Parts Holders	94
Lista 8000 Workstation ESD Accessories	95
Lista 8000 Workstation Footrests	95
Lista 8000 Workstation CPU Holders	95
Lista 8000 Workstation Keyboard Holders	95
Lista 8000 Workstation Pivoting Accessories	96



Completely integrated and modular, Lista 8000 workstations ensure that you'll always have the exact workstation your work demands. With their easy reconfigurability, Lista 8000 workstations can be altered for multiple functions and changes in your workflow. This enduring adaptability means that you'll have a cost-effective solution for all of your assembly, repair and light manufacturing workstation needs, both today and in the future.

Maximum return on investment

Lista 8000 workstations feature a unique column design that provides a sturdy, flexible backbone for your evolving needs. Thanks to the system's versatility and durability, this exceptional series of workstations pays for itself quickly, while providing continuous value for years to come.

Ease of assembly

The Lista 8000 workstation offers the industry's fastest and simplest set-up and reconfiguration. Virtually no hardware or tools are required, making changes free of mistakes and frustration.



The Lista 8000 workstation installation tool kit

Low-cost conversion

With its interchangeable modular parts, the Lista 8000 workstation can be custom-configured to suit a range of applications at a lower cost than competitive workstations.

Ergonomics

With an emphasis on ergonomics, the Lista 8000 workstation improves comfort, eliminates wasted motion, and minimizes fatigue and strain.

Paint Colors

- *Lista 8000 workstations are available in Light Gray only.*
- *Other colors are available on request.*
- *Accent trim for support columns, lights, steel shelves and footrests (included with each workstation) is available in a choice of colors — see page 88.*



Ease and flexibility when positioning system components are a hallmark of Lista 8000 workstations.

Lista 8000 Workstation Features

Simplicity

- Fast, easy assembly.
- With our starter and adder system, workstations can easily link to create infinite layout options.
- Workstations can be converted from single- to double-sided at any time — quickly, easily and inexpensively.

Modularity

- Five standard section widths: 30", 36", 48", 60" and 72".
- Section widths can be mixed and matched to suit your needs.
- Three column heights: 54", 72" and 84" (other heights available upon request).
- Full column height can be used to attach worksurfaces, shelves or other accessories.

Strength

- Made of high-strength, cold rolled steel, the system's columns provide maximum structural integrity.

Adaptability

- Unique multi-slot system (see page 86) allows easy, secure placement and reconfiguration of accessories.

Mobility

- Mobile workstations are easily relocated, allowing fast layout changes. For mobile companion cabinets, see pages 42 and 48.

Secure storage

- Hanging drawers and overhead cabinets can be added anywhere you need secure storage for valuable tools, equipment, parts or personal effects. Lista drawer storage cabinets also make excellent companion cabinets — see pages 42 and 48.

Electrostatic control

- Electrostatic control products and accessories are available to meet most ESD-related requirements.

Visibility

- Optional task lighting provides illumination for the most exacting work.

Cleanroom certification

- Lista 8000 workstations have been certified for use in a CLASS 10,000 CLEANROOM per the USA Federal Standard 209E and CLASS 7 per ISO 14644 International Cleanroom Standard. For information on specifying a cleanroom workstation, please contact your Lista representative.

Aesthetics


- Contemporary appearance — all components are powder coated in attractive Light Gray, with other colors available on request.
- Select from an array of trim colors to suit your decor or designate a particular department or function.

Double-sided column — worksurfaces and accessories can attach to either side of column

Easily-repositioned hanging accessories

Decorative accent trim

Outriggers for stability

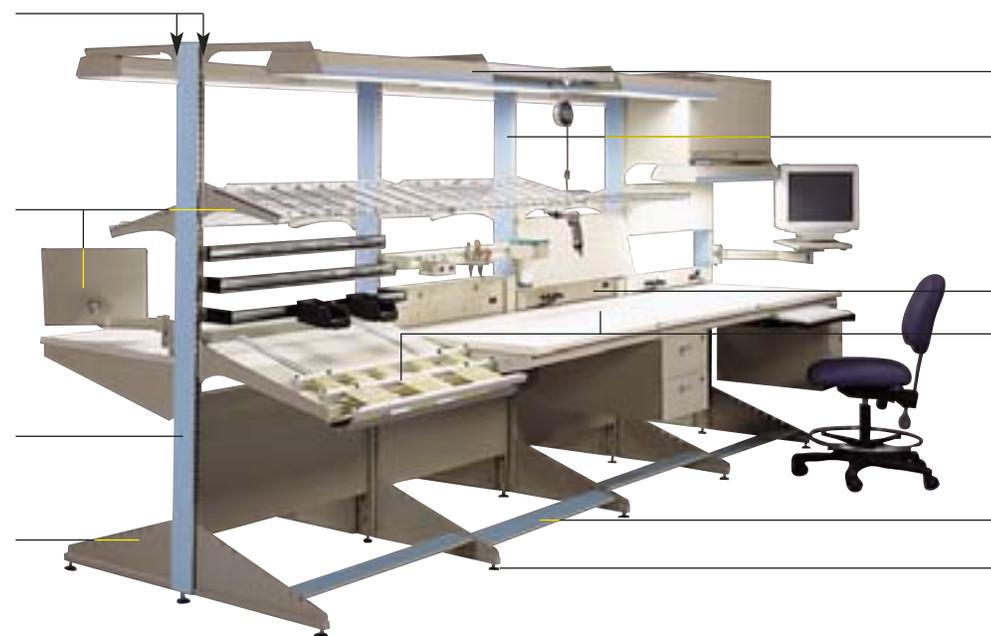

Overhead lighting

Choice of column heights

Variety of utility beams

Adjustable worksurfaces in a variety of sizes and materials

Variety of footrests

Leveling glides or optional casters

Lista 8000 workstations give the user the greatest flexibility possible. Our unique Definite Positioning System™, numerous footprint configurations, and easy-to-assemble starter and adder sections, mean you can easily adapt and reconfigure your workstations as your needs evolve.



Brackets fit into either micro slots (top of photo) or macro slots (bottom).

Definite Positioning System

An innovative assembly concept which features one macro and two micro slots on each side of a high strength column, this approach greatly reduces the time and effort needed to attach components to the system, while making highly efficient use of space. Since columns are double-sided, a single column may be used by two back-to-back workstations, as well as adjacent sections.

Macro slots provide support for heavy-duty components, such as worksurfaces and shelving. In the case of adjacent workstation sections, the macro slot is utilized by both to save space and reduce system cost.

Components that attach to the macro slots are vertically adjustable in 3" increments.



Micro slots provide support for lighter-duty components, such as power beams and parts bin rails. Micro slots are located to the left and right of the macro slot, and provide maximum component placement options. Components that attach to the micro slots are vertically adjustable in 1" increments.

Floor space utilization

Lista 8000 workstations enable you to achieve maximum productivity per square foot. Our workstations can be designed in numerous configurations to meet any application (see examples to right). By the use of starter, adder and corner sections, you can configure your workstations to suit your needs today, and as future needs evolve.

Many workstation configurations may also be ordered with mobile capabilities, enabling you to quickly and easily relocate entire workstation groupings (see page 89).


Please contact your Lista representative for additional configuration options.




In-line Configuration




In-line Back to Back Configuration




T Configuration




U Configuration



X Configuration



In-line with Center Conveyor Configuration



How to order an Easy-Order Lista 8000 workstation section

Follow the 5 steps below for starter section and repeat for each adder section.

1. Select Easy-Order section configuration.

- A-SS = single-sided starter
- A-SA = single-sided adder
- A-SC = single-sided corner adder
- A-DS = double-sided starter
- A-DA = double-sided adder
- A-DC = double-sided corner adder

2. Select section length.*

- 36 = 36" long
- 48 = 48" long
- 60 = 60" long
- 72 = 72" long

*corner adders 36" long only

3. Select section height.

- 54 = 54" high
- 72 = 72" high
- 84 = 84" high

4. Select section depth.

- 28 = 28" deep
- 30 = 30" deep




5. Select worksurface material.

- SL = plastic laminate
- SD = static dissipative plastic laminate

EXAMPLE: to order a starter single-sided workstation section that is 60" long, 84" high and 30" deep with a plastic laminate worksurface, the part number would be **A-SS608430SL**.

To order an adder single-sided workstation section that is 48" long, 84" high and 30" deep with a plastic laminate worksurface, the part number would be **A-SA488430SL**.

To order an adder single-sided corner workstation section that is 84" high and 30" deep with a plastic laminate worksurface, the part number would be **A-SC368430SL**. (When ordering an "L" shaped configuration, 2 starters must be used with a corner adder.)



A-SS Single-sided starter

- Includes:
- 1 starter assembly (see page 6)
 - 1 footrest
 - 2 outriggers
 - 1 worksurface assembly
 - 1 single-sided power beam (15 amp)
 - 1 open wire shelf, 12" depth
 - 1 light fixture assembly
 - 1 parabolic light diffuser

A-SA Single-sided adder

- Includes:
- 1 adder assembly (see page 6)
 - 1 footrest
 - 1 outrigger
 - 1 worksurface assembly
 - 1 single-sided power beam (15 amp)
 - 1 open wire shelf, 12" depth
 - 1 light fixture assembly
 - 1 parabolic light diffuser

A-SC Single-sided corner adder

- Includes:
- 1 adder assembly, 36"
 - 1 outrigger
 - 1 corner worksurface assembly
 - 1 single-sided power beam (15 amp)
 - 1 open wire shelf, 12" depth
 - 1 light fixture assembly
 - 1 parabolic light diffuser

A-DS Double-sided starter

- Includes:
- 1 starter assembly (see page 6)
 - 2 footrests
 - 4 outriggers
 - 2 worksurface assemblies
 - 1 double-sided power beam (15 amp)
 - 2 open wire shelves, 12" depth
 - 2 light fixture assemblies
 - 2 parabolic light diffusers

A-DA Double-sided adder

- Includes:
- 1 adder assembly (see page 6)
 - 2 footrests
 - 2 outriggers
 - 2 worksurface assemblies
 - 1 double-sided power beam (15 amp)
 - 2 open wire shelves, 12" depth
 - 2 light fixture assemblies
 - 2 parabolic light diffusers

A-DC Double-sided corner adder

- Includes:
- 1 adder assembly, 36"
 - 2 outriggers
 - 2 corner worksurface assemblies
 - 1 double-sided power beam (15 amp)
 - 2 open wire shelves, 12" depth
 - 2 light fixture assemblies
 - 2 parabolic light diffusers

The workstation components shown on this page are pre-configured to include our most popular and versatile Lista 8000 workstation styles. To design a custom workstation to suit your exact needs, see pages 88-89.

Lista 8000 workstations consist of a starter section, and as many adder sections as you need for your application.

Select from single- or double-sided starters, adders, or corners in all standard section widths and heights. You may also choose either 28"- or 30"- deep worksurfaces in either plastic laminate or static dissipative laminate. Easy-Order sections include all accessories shown in the charts to the left. To order additional accessories, please see pages 91-96.

Designing a custom Lista 8000 workstation is a simple and straightforward process. Start by selecting the structural elements (starter and adder assemblies), add outriggers, choose worksurface(s), and add the accessories that fulfill your needs.


In addition to the column heights shown, columns can be custom cut to any size you request.



1. Select starter assembly

The starter assembly is the first component for each workstation and includes 2 columns with outer and inner trim, and a closed stabilizer panel. Optional open stabilizer panel may be ordered for full access from the rear of the workstation. To specify open stabilizer in place of closed stabilizer, add the prefix "O" to the part number.

SECTION LENGTH					COL. HT.
30"	36"	48"	60"	72"	
8692	8897	8896	8601	8702	54"
8694	8901	8900	8600	8700	72"
8696	8903	8902	8603	8704	84"



2. Select adder assemblies

The adder assembly for each adjoining section includes a single column with outer and inner trim, and a closed stabilizer panel. Optional open stabilizer panel may be ordered for full access from the rear of the workstation. To specify open stabilizer in place of closed stabilizer, add the prefix "O" to the part number.

SECTION LENGTH					COL. HT.
30"	36"	48"	60"	72"	
8693	8899	8898	8606	8703	54"
8695	8906	8905	8605	8701	72"
8697	8908	8904	8608	8705	84"




3. Select optional column cap

Plastic cap finishes off top of column. Comes included with all 54" high starter and adder assemblies.

PART NO.	L X D
8004	4" x 1 1/2"



8044



8040

4. Select outriggers

Choose from 2 outrigger designs:

8044 22" deep, for workstation with footrest

8040 23" deep, for workstation not using a footrest

Order 1 outrigger for each column used (2 per column for double-sided applications).

PART NO.	OUTRIGGER DEPTH
8044	22"
8040	23"

5. Select worksurface assembly – see page 90

6. Select accessories – see pages 91-96

Accent Trim Colors

Plastic accent trim for support columns, lights, steel shelves and footrests (included with each workstation) is available in a choice of colors.




COLOR

Bright Blue



COLOR

Classic Blue



COLOR

Light Blue




COLOR

Black



COLOR

Teal



COLOR

Burgundy




COLOR

Royal Blue



COLOR


Dark Blue




COLOR

Gray


Build-Your-Own Mobile Lista 8000 Workstations




single-sided starter



double-sided starter



single-sided adder




double-sided adder

1. Select mobile starter base

Base consists of mobile base frame, 2 swivel 4" locking casters and 2 swivel with lock 4" casters, mobile outriggers and all required hardware. Single-sided base is 34" deep; double-sided base is 54" deep.

SECTION LENGTH					DESCRIP.
30"	36"	48"	60"	72"	
8313SS	8969SS	8968SS	8668SS	8768SS	single-sided
8313DS	8967DS	8974DS	8669DS	8769DS	double-sided



2. Select matching starter assembly


The starter assembly includes 2 columns with outer and inner trim and a closed stabilizer panel. Optional open stabilizer panel may be ordered for full access from the rear of the workstation. To specify open stabilizer in place of closed stabilizer, add the prefix "O" to the part number.

SECTION LENGTH					COL. HT.
30"	36"	48"	60"	72"	
8692	8897	8896	8601	8702	54"
8694	8901	8900	8600	8700	72"
8696	8903	8902	8603	8704	84"

3. Select mobile adder base

Base consists of mobile base frame, 1 swivel 4" locking casters and 1 swivel with lock 4" caster, mobile outrigger(s) and all required hardware. Adder bases must always be mounted on the right-hand side of a single-sided starter base.

SECTION LENGTH					DESCRIP.
30"	36"	48"	60"	72"	
8313SA	8969SA	8968SA	8668SA	8768SA	single-sided
8313DA	8967DA	8974DA	8669DA	8769DA	double-sided



4. Select matching adder assembly

The adder assembly for each adjoining section includes a single column with outer and inner trim and a closed stabilizer panel. Optional open stabilizer panel may be ordered for full access from the rear of the workstation. To specify open stabilizer in place of closed stabilizer, add the prefix "O" to the part number.

SECTION LENGTH					COL. HT.
30"	36"	48"	60"	72"	
8693	8899	8898	8606	8703	54"
8695	8906	8905	8605	8701	72"
8697	8908	8904	8608	8705	84"



5. Select optional column cap

Plastic cap finishes off top of column. Comes included with all 54" high starter and adder assemblies.

PART NO.	L X D
8004	4" x 1 1/2"

6. Select worksurface assembly – see page 90

7. Select accessories – see pages 91-96

All Lista 8000 workstation sections can be ordered in a mobile configuration, providing for easy relocation and smooth movement of workstations. Stationary Lista 8000 workstations can easily be retrofitted to mobile configurations when desired.

Designing a custom Lista 8000 mobile workstation is a similar process to designing a stationary workstation. Start by choosing a base (either single-sided or double-sided), select structural elements (starter and adder assemblies), choose worksurface(s), and add the accessories that fulfill your needs.

In addition to the column heights shown, columns can be custom cut to any size you request.



Plastic Laminate Worksurface Assemblies


Worksurface is constructed of 1" thick medium density particle board covered on top and all sides with dove gray, non-glare matte finish plastic laminate. The under side of the work surface is sealed with a plastic tension sheet to prevent moisture absorption, warping and shedding. Threaded steel inserts facilitate easy assembly and reconfiguration. Assembly includes 2 work surface support brackets and 2 work surface support beams.

PART NO.	LENGTH
28" deep	
8729	30"
8924	36"
8923	48"
8620	60"
8715	72"
30" deep	
8730	30"
SA101	36"
SA105	48"
SA109	60"
SA113	72"

Static Dissipative Laminate Worksurface Assemblies

Worksurface is the same as the plastic laminate work surface, but with dove gray, non-glare matte finish plastic laminate that provides a controlled path to ground for the dissipation of static electricity. The work surface is provided with a grounding kit that must be used to provide proper protection for components and personnel. Static dissipative value for the material is $10^6 - 10^9$. Assembly includes 2 work surface support brackets and 2 work surface support beams.

PART NO.	LENGTH
28" deep	
8754	30"
8994	36"
8992	48"
8622	60"
8716	72"
30" deep	
8755	30"
SA155	36"
SA159	48"
SA163	60"
SA167	72"




Corner Worksurface Assemblies

Construction is the same as other work surfaces. Length is 36". Assembly includes required brackets.

PART NO.	WORKSURFACE L X D
Plastic laminate	
8812	36" x 28"
SA200	36" x 30"
Static dissipative laminate	
8814	36" x 28"
SA204	36" x 30"

Additional Worksurface Materials

Other work surface materials (stainless steel, satin coat steel, butcher block and other materials) and dimensions are available upon request.



Worksurface Support Legs

Support legs for work surface, adjustable from 28" to 34" high. 8094 supports freestanding work surfaces. 8265 attaches to front support beam of work surface to increase load capacity or dampen vibration.

PART NO.	DESCRIPTION
8094	corner work surface leg
8265	work surface front support leg



Ball Transfer Worksurfaces

Ball transfer work surfaces offer a cost effective, efficient means of workflow management for products or pallets in an assembly environment. Repair and rework stations are another ideal application for this integrated material handling system.

Ball transfer work surfaces may be integrated with all Lista 8000 workstation section sizes, work surface depths and materials. Please contact your Lista representative for help in configuring a system and providing the solution best suited to your requirements.



Lista 8000 Workstation Shelves



Open Wire Shelves

Welded steel wire shelf has chrome plated finish. Mounts in macro slots. Adjusts vertically in 3" increments and adjusts horizontally 15° and 30°. Includes front lip. Weight capacity is 150 lbs. 12" deep.

PART NO.	LENGTH
8884	30"
8927	36"
8925	48"
8625	60"
8725	72"

Lab Style Wire Shelves

Lab style wire shelves have cross wire welded on underside of shelf, so work boxes slide easily along length of shelf. 9" deep.

PART NO.	LENGTH
4581	30"
4381	36"
4481	48"
4681	60"
4781	72"

Wire Shelf Dividers

Shelf divider snaps into place.



PART NO.	HEIGHT
8145	12"



Steel Shelves

Sturdy steel shelf mounts in macro slots. Adjusts vertically in 3" increments and adjusts horizontally 15° and 30°. Weight capacity is 300 lbs. Includes color trim.

PART NO.	LENGTH
12" deep	
8285	30"
8321	36"
8320	48"
8482	60"
8592	72"
16" deep	
8287	30"
8341	36"
8340	48"
8484	60"
8593	72"
20" deep	
8289	30"
8361	36"
8360	48"
8486	60"
8594	72"

Steel Shelf Dividers

Mounts on shelf with 2 screws. 8" tall.



PART NO.	FOR SHELF DEPTH
8319	12"
8339	16"
8349	20"



Steel Shelf Lips

Shelf lip mounts to front of shelf and can be positioned at height of either 5/8" or 1 1/2".

PART NO.	SHELF LENGTH
8311	30"
8386	36"
8387	48"
8448	60"
8595	72"



Variable Angle Shelves

Center mounting shelf is 18" or 24" deep. The shelf adjusts from totally flat to a 25° angle and has a capacity of 150 lbs.

PART NO.	LENGTH
18" deep	
8312	30"
8328	36"
8327	48"
8497	60"
24" deep	
8314	30"
8355	36"
8354	48"



Sloping Document Shelves

15° vertical steel shelf is 12" high and has a 2" lip to hold books, manuals, drawings, etc. Mounts in micro slots.

PART NO.	LENGTH
8298	30"
8316	36"
8315	48"
8455	60"
8590	72"



Power Beams with Light Switch

Available in single- or double-sided configuration. Mounts in micro slots. Provided with separate on/off switch for light which allows remainder of beam to be left powered. 7 outlets per side. 15 amp standard.

PART NO.	LENGTH
Single-sided	
8860	30"
8937	36"
8930	48"
8647	60"
8745	72"
Double-sided	
8862	30"
8944	36"
8931	48"
8648	60"
8746	72"



Air Beams

Air beam is supplied with:

- (1) 1/4" NPT female inlet on top
 - (2) 1/4" NPT female outlets on front (single-sided) and (2) 1/4" NPT female outlets per side (double-sided) for 30" long beams
 - (3) 1/4" NPT female outlets on front (single-sided) and (3) 1/4" NPT female outlets per side (double-sided) for 36", 48", 60" or 72" long beams
 - (2) end mounted jumpers
- Mounts in micro slots.

PART NO.	LENGTH
Single-sided	
8879	30"
8949	36"
8950	48"
8951	60"
8750	72"
Double-sided	
8853	30"
8977	36"
8978	48"
8660	60"
8751	72"

Vertical Power Strips

Available in 15 amp or 20 amp, and GFCI. Lighted on/off switch, 6' cord with grounded plug and circuit breaker included. Fixture and brackets are black. Mounts vertically to front and back of micro slots. Bracket and hardware supplied. See page 35 for isolation kit when used with static dissipative worksurface.



PART NO.	DESCRIPTION
8942	15 amp with 6 outlets
8943	20 amp with 6 outlets
8947	15 amp GFCI with 6 outlets
8948	20 amp GFCI with 6 outlets



Cable Trays

Tray neatly gathers bundles of loose horizontal wires and provides random access for cable routing along its length. Painted black. Mounts in micro slots.

PART NO.	L X D X H
8302	30" x 4" x 3"
8389	36" x 4" x 3"
8390	48" x 4" x 3"
8498	60" x 4" x 3"
8597	72" x 4" x 3"

Vertical Cable Clip

Neatly gathers bundles of loose vertical wires. Painted black. Mounts in micro slots.



PART NO.	SIZE
8391	3" x 3"



Fluorescent Light Fixture Assemblies

Housing for (2) 34 watt fluorescent T8 bulbs. Mounts in macro slots. Includes color trim. Does not include bulbs or diffuser (see right). 36" long fixture accepts 36" bulbs. 48", 60" and 72" long fixtures accept 48" bulbs.

- 14" depth is suited for placement under overhead cabinets
- 19" depth is standard
- 26" depth is suited for use with extra-deep worksurfaces

PART NO.	LENGTH
14" deep	
8533S	36"
8534S	48"
8655S	60"
8784S	72"
19" deep	
8533L	36"
8534L	48"
8655L	60"
8784L	72"
26" deep	
8533XL	36"
8534XL	48"
8655XL	60"
8784XL	72"



Parabolic Diffusers

Chrome plated plastic parabolic grid directs light onto worksurface while eliminating glare on adjacent workstations. Fits into fluorescent fixture with 2 threaded fasteners.

PART NO.	LENGTH
8179	36"
8178	48"
8681*	60"
8781*	72"

*60" and 72" diffuser kits consist of 48" diffuser and 2 filler plates.


Acrylic Diffusers

Flat acrylic sheet reduces glare. Fits into fluorescent fixture with support bar and 2 threaded fasteners.

PART NO.	LENGTH
8181	36"
8180	48"
8686*	60"
8782*	72"

*60" and 72" diffuser kits consist of 48" diffuser and 2 filler plates.

Either a parabolic or acrylic diffuser should be chosen for each light fixture.

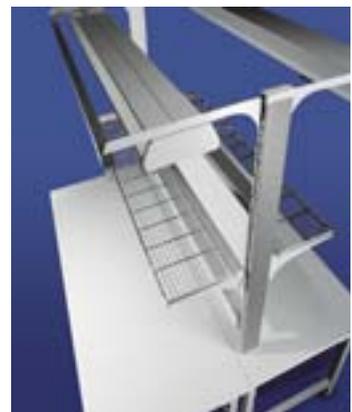

Lista 8000 Workstation Hanging Drawers, Overhead Cabinets and Panels



Hanging Drawer Assemblies

Steel drawer mounts under worksurface to worksurface support beams. Drawer can slide to any horizontal position. Includes smooth nylon rollers, recessed handles, mounting brackets and drawer stops. Drawer has a 100 lb. capacity, and is 23" deep. 100% full extension. Includes lock and 2 keys.

PART NO.	DESCRIPTION
8841	(1) 6" drawer
8844	(2) 6" drawers
8843	(3) 6" drawers
8842	(1) 6" and (1) 12" drawers



Pelican® Drawer

Secure storage for legal hanging files or personal effects, plus segmented tray for pencils, pens, paper clips etc. Designed to allow easy clearance for worker's knees. Thermo-formed polystyrene body with polyurethane drawer face. Mounts under worksurface to worksurface support beams. Drawer can slide to any horizontal position. Includes concealed ball bearing slides and fully integrated locking system.

PART NO.	L X D X H
8845	19" x 23" x 10"




Overhead Cabinets

Steel cabinet with retractable locking door. Mounts on micro slots. Includes mounting brackets, lock and 2 keys.

PART NO.	L X D X H
8297	30" x 15" x 16"
8956	36" x 15" x 16"
8955	48" x 15" x 16"
8650	60" x 15" x 16"
8760*	72" x 15" x 16**


*consists of (2) 36" wide cabinets



Pegboard Panels

Sturdy painted steel pegboard panel, ideal for hanging tools, etc. 18" high.

PART NO.	LENGTH
8333	30"
8334	36"
8335	48"
8336	60"



Louvered Panels

Sturdy painted steel louvered panel, ideal for hanging plastic bin boxes. 18" high.

PART NO.	LENGTH
8442	30"
8443	36"
8444	48"
8445	60"



Modesty Panels

Steel or fabric-covered modesty panel acts as a privacy screen between double-sided assemblies (or single-sided where required). Steel panels can be used as fill-in panel or magnet panel to hold instructions or drawings. Fabric-covered modesty panel acts as tackboard and sound dampener. Standard fabric colors are Navy Blue and Night Black. Other colors available upon request.

PART NO.	LENGTH
10" steel panel	
8137	30"
8032	36"
8030	48"
8452	60"
8581	72"
20" steel panel	
8138	30"
8033	36"
8031	48"
8453	60"
8582	72"
20" fabric-covered panel*	
8139	30"
8036	36"
8048	48"
8462	60"
8586	72"

*specify Navy Blue or Night Black



Reversible Markerboard/Tackboards

Two-sided reversible board. Features white magnetic markerboard on 1 side and gray fabric tackboard on the other. Also functions as privacy panel and sound dampener. 30" high.


PART NO.	LENGTH
8771	30"
8772	36"
8773	48"



Light-Duty Parts Bin Rails

Parts bin rail supports industry-standard plastic parts bins. Mounts in micro slots. Three depths (2", 4" and 6") for tiered placement of bins. Chrome finish. (Bins not included.)

PART NO.	LENGTH
2" deep	
8293	30"
8243	36"
8240	48"
8478	60"
8575	72"
4" deep	
8294	30"
8244	36"
8241	48"
8479	60"
8576	72"
6" deep	
8295	30"
8245	36"
8242	48"
8480	60"
8577	72"



Heavy-Duty Parts Bin Rails

Rail is easily adjustable for ergonomic access. It can be mounted parallel to the worksurface or at a 15° angle. Mounts in micro slots. (Bins not included.)

PART NO.	LENGTH
8223	30"
8225	36"
8226	48"
8475	60"
8546	72"



Utility Bins

Steel bin mounts in micro slots. Holds tools, bottles, wipes, reeled solder dispenser, etc. Front edge can be used as a parts bin rail.

PART NO.	L X D X H
8299	30" x 4" x 2"
8247	36" x 4" x 2"
8246	48" x 4" x 2"
8446	60" x 4" x 2"
8578	72" x 4" x 2"



Lockable Tool Boxes

Steel tool box securely stores tools and other valuables. Mounts in micro slots. Comes with lock and key.

PART NO.	L X D X H
8300	30" x 4" x 2"
8205	36" x 4" x 2"
8204	48" x 4" x 2"
8464	60" x 4" x 2"
8587	72" x 4" x 2"



Tool and Accessory Holders

Tool and accessory holders add convenience to the workplace. They hang on parts bin rail or utility bin and can be positioned for easy reach.

PART NO.	DESCRIPTION	SIZE
8277	tool holder	3" x 5"
8276	solder spool holder	5" x 5"
8281	bottle holder	3" inside diam.
8275	Kim Wipe holder	5" x 5"

Airgun Holder

Mounts to worksurface support beam. 1 1/2" x 1 1/2" with 1" diameter hole.

PART NO.
4863



Tool Glide Track and Trolley Assemblies

Smooth-moving glide keeps electric and pneumatic tools properly positioned. If used in conjunction with fluorescent light assembly, glide track mounts on brackets for fluorescent lights. If used alone, mounting brackets must be ordered separately (see below).

PART NO.	LENGTH
8975	36"
8976	48"
8633	60"
8728	72"
Tool trolley only	
8184	

Mounting Brackets

Come in pairs.

PART NO.	DEPTH
8199	14"
8196	19"
8182	26"



Turbo Tray

For holding small parts. Molded of durable plastic with 24 compartments. Rotates 360° on heavy-duty ball bearing.

PART NO.	DIAMETER	HEIGHT
8510	30"	4 1/2"



Lista 8000 Workstation Miscellaneous Accessories

Worksurface Grounding Kit

Kit is supplied with all static dissipative work-surfaces. 8' cord includes 1 megohm resistor.

PART NO.

SC10

Dual Wrist Strap Receptacle

Mounts under worksurface to worksurface support beams. Dual plugs accept operator's and supervisor's wrist strap at same time.

PART NO. DESCRIPTION

SC12 dual wrist strap receptacle

SC15 wrist strap with 6' coil cord

Common Point Ground Block

Two connection sides — direct to ground and 1W in series to ground.

PART NO.

SC14

ESD Mat Kits

Kit includes either a durable 2-layer rubber mat or a 3-layer vinyl mat. Includes wrist strap and dual receptacle. Rubber mat resistance is $R^{1g} < 8 \times 10^6$ ohms, $R^{11} < 2 \times 10^7$ ohms. Vinyl mat resistance is $R^{1g} < 1.7 \times 10^7$ ohms, $R^{11} < 2.8 \times 10^7$ ohms. Mats available in gray or blue.

PART NO. MAT SIZE

Rubber (gray)

6436G 36" x 24"

6448G 48" x 24"

6460G 60" x 24"

6472G 72" x 24"

Rubber (blue)

6436B 36" x 24"

6448B 48" x 24"

6460B 60" x 24"

6472B 72" x 24"

Vinyl (gray)

66236G 36" x 24"

6248G 48" x 24"

6260G 60" x 24"

6272G 72" x 24"

Vinyl (blue)

6236B 36" x 24"

6248B 48" x 24"

6260B 60" x 24"

6272B 72" x 24"



Swivel Footrests

Drops into slots on 8044 slotted outriggers. Adjustable to suit worker at individual workstation. Includes color trim.

PART NO. LENGTH

8885 30"

8911 36"

8910 48"

8610 60"

8710 72"



Freestanding Footrest

Ergonomic footrest provides support for user's feet. Height adjustable from 3"-12 1/4". Footrest platform is 15" deep x 21 3/4" wide, and adjusts from totally flat to a 25° angle. Includes ribbed mat.

PART NO.

8909

CPU Holders

Allows CPU to be mounted under worksurface (off of floor). Mounts under worksurface to worksurface support beams. Holder can slide to any horizontal position. Pullout style allows easy access to rear of CPU.

PART NO.	DESCRIPTION	L X W X H
8440	fixed	22" x 9 1/2" x 19"
8439	pullout	22" x 9 1/2" x 19"



Pullout Keyboard Holders

Allows computer keyboard to be stored under worksurface when not in use.

PART NO.	DESCRIPTION	L X W
8437	pullout keyboard holder	21" x 10"
8450	pullout keyboard holder	28" x 10"
8438	swivel keyboard holder	21" x 10"
8451	swivel keyboard holder	28" x 10"



Macro Slot Universal Mounting Bracket

Bracket is made of cast zinc aluminum alloy. Mounts in macro slots and is vertically adjustable in 3" increments. For attaching tubular swing arm (included with pivoting accessories).



PART NO.
8420

Column-Mount Universal Mounting Bracket

Bracket is welded steel. Bolts on through column and is vertically adjustable in 3" increments. For attaching tubular swing arm (included with pivoting accessories).



PART NO.
8423



Monitor Shelf with Keyboard Holder

Holds computer monitor. Includes retractable wire keyboard holder. 12 3/8" wide x 12 3/8" deep. 75 lb. capacity. Requires universal mounting bracket (not included).

PART NO.
8878



Equipment Shelf

Holds a variety of customer-supplied equipment or tools. 12 3/8" wide x 12 3/8" deep. 75 lb. capacity. Requires universal mounting bracket (not included).

PART NO.
8857



Accessory Shelf

For easy access to small tools, instruments, parts, etc. Ribbed mat optional. 21 1/4" wide x 7 3/8" deep. 75 lb. capacity. Requires universal mounting bracket (not included).

PART NO.	DESCRIPTION
8887	accessory shelf
8759	ribbed rubber mat



Document Holder

For displaying papers, plans, etc. 11 7/8" wide x 13 3/4" high. Includes lip for pencils, pens, etc. Requires universal mounting bracket (not included).

PART NO.
8666



Large Document Holder

For displaying large documents, and open binders and books. 23 5/8" wide x 13 3/4" high. Includes lip for pencils, pens, etc. Requires universal mounting bracket (not included).

PART NO.
8670

Optional Mouse Tray

Mouse tray attaches to monitor shelf with keyboard holder (above) to hold computer mouse and/or mouse pad. 9 1/2" wide x 7 5/8" deep. Ordered separately.

PART NO.
8895



Flat Panel Monitor Arm

For attaching flat panel monitor to upright. 17 1/2 lb. capacity. Vertically adjustable in 3" increments. Mounts in macro slots. Includes mounting bracket.

PART NO.
8415



Bin Container

Holds 3 rows of plastic bins for easy access to parts and components. Interior space per shelf is 20" wide x 6" deep. Top shelf is 3 1/4" high, second and third shelves are 3 3/4" high. Requires accessory shelf (above) for support (not included), or can be used freestanding. 50 lb. capacity. Does not include bin boxes. Requires universal mounting bracket (not included).

PART NO.
8888