

Model 138-LRC & LRCT Live Roller Curve Conveyor

The Model 138-LRC is a light-duty live roller curve that provides a positive drive for negotiating 90°, 60°, 45°, or 30° turns. It may be self-powered or can be slave driven from 138-ACC, LRS or LRSS conveyors.



- ★ 4 Bed Widths
- ★ Reversible
- ★ Adjustable LS-Type Floor Supports Available



ACCUMULATION - MINIMUM PRESSURE

138-LRC

Between Rail Width	Overall Frame Width	"A"	"B"	"C"	"R"	Number of Rollers**				WEIGHTS (Lbs.)			
						90°	60°	45°	30°	90°	60°	45°	30°
10"	12"	3 1/16" MAX.	9 3/4"	9 5/8"	25"					272	262	252	242
13"	15"					30S	38S	34S	30S	278	268	258	248
16"	18"					22T/4S	14T/12S	10T/12S	6T/12S	287	277	267	257
22"	*24"					10 5/16"	10 1/8"	32 1/2"	22T/4S	14T/12S	10T/12S	6T/12S	302

All weights in catalog are **conveyor weights only**. Accessories, crating, etc., are not included.

*NOTE: 24 in. OAW curve has 1.9 in. dia. tapered & straight rollers mounted in a 6 1/2 in. x 1 in. x 12 ga. painted form steel channel.

*T = TAPERED
S = STRAIGHT


138-LRCT

Between Rail Width	Overall Frame Width	"A"	"B"	"C"	"R"	Number of Rollers**				WEIGHTS (Lbs.)			
						90°	60°	45°	30°	90°	60°	45°	30°
10"	12"	3 1/16" MAX.	9 3/4"	9 5/8"	25"					272	262	252	242
13"	15"					30T/8S	20T/24S	15T/22S	10T/22S	278	268	258	248
16"	18"					39T/8S	26T/24S	19T/22S	13T/22S	287	277	267	257
22"	*24"					10 5/16"	10 1/8"	32 1/2"	39T/8S	26T/24S	19T/22S	13T/22S	302

All weights in catalog are **conveyor weights only**. Accessories, crating, etc., are not included.

*NOTE: All rollers have 5/16" hex shafts

*T = TAPERED
S = STRAIGHT

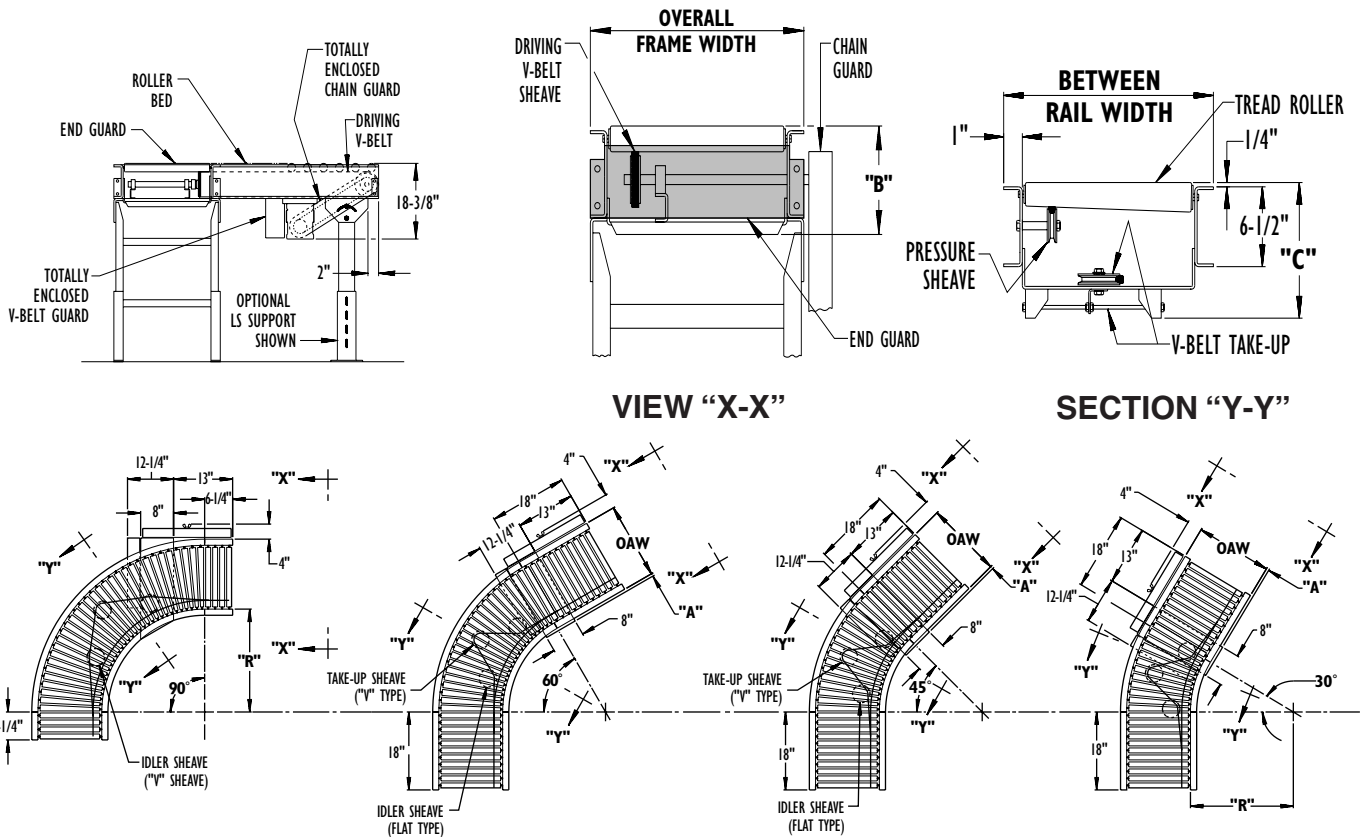

Standard Specifications

BED—(LRC) Roller bed with 1-3/8 in. dia. roller x 18 ga. galvanized tube (12 in.—18 in. OAW) and 2-1/2 in. dia. tapered to 1-11/16 in. dia. roller x 16 ga. galvanized tube and 1.9 in. dia. straight rollers x 16 ga. galvanized tube (24 in. OAW). Mounted in 6-1/2 in. x 12 ga powder painted formed steel channel frame.

BED—(LRCT) Roller bed with 1-3/8 in. tapered roller x 18 ga. galvanized tube (1-1/2 in. dia. tapered to 1 in.) and 1-3/8 in. dia. x 18 ga. galvanized straight rollers. All rollers have 5/16 in. hex shafts. Mounted in 6-1/2 in. x 12 ga powder painted formed steel channel frame.

END DRIVE—Mounted underneath bed section.

DRIVING BELT—Endless B-section V-Belt, industrial grade.

PRESSURE SHEAVES—2-1/2 in. dia. with 3/8 in. bore.

IDLER SHEAVE—4 in. dia. x 5/8 in. bore V type and/or 5-1/2 in. dia. x 5/8 in. bore flat type.

TAKE-UP—Take-ups provided to maintain proper V-belt tension. Includes 4-3/8 in. dia. x 5/8 in. bore V type take-up sheave.

BEARINGS—Sealed, pre-lubricated, self aligning ball bearings with eccentric lock collar on flange and pillow block bearings. Pre-lubricated ball bearings in tread rollers.

BUTT COUPLINGS—Standard for connecting 138-ACC, 138-LRS, and 138-LRSS.

SPEED REDUCTION—Sealed worm gear reducer, driven by V-belt. No. 50 roller chain to drive sheave.


MOTOR—1/2 HP—230/460V—3 PH. 60 Hz. Totally Enclosed.

CONVEYING SPEED—Constant 65 FPM.

CAPACITY—150 lbs. total distributed live load.

FLOOR SUPPORTS—Now supplied as optional equipment.

Horsepower required to slave-drive LRC's & LRCT's from ACC's affect the lengths of ACC's due to the capacities of the driving V-belt. The four (4) arrangements shown, illustrate basic slave limitations. Other arrangements are possible.

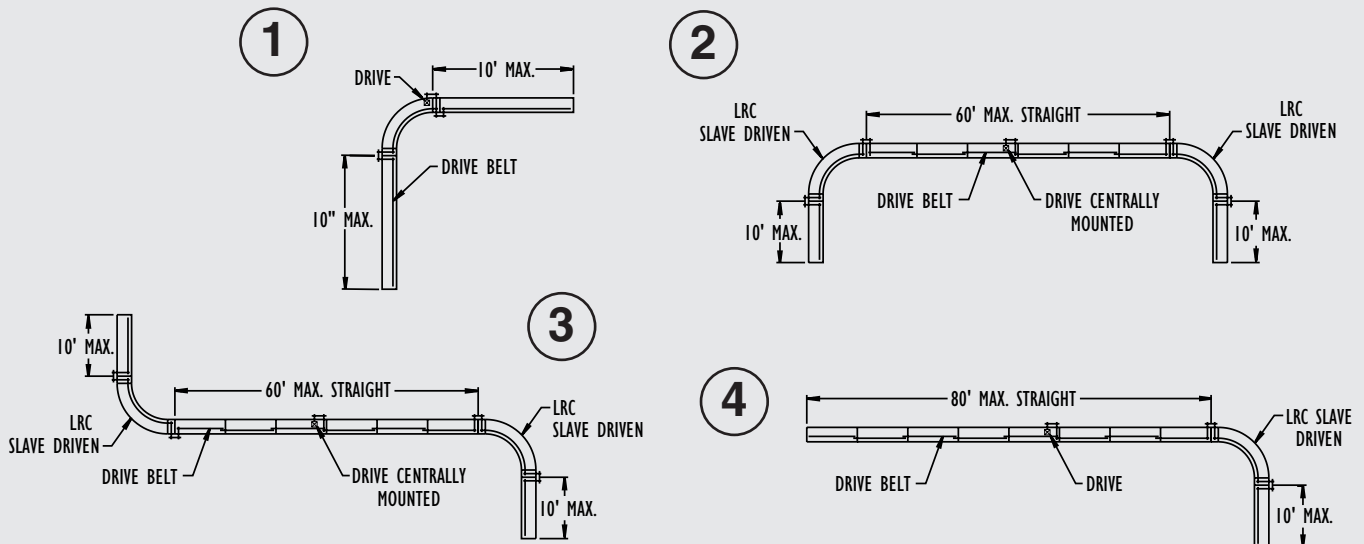

Optional Equipment

FLOOR SUPPORTS—LS Type floor supports are available with a wide range of adjustment. Specify top of belt or roller elevation. One support required at every bed joint and ends of conveyor. Holes in feet for lagging to floor. Knee braces recommended above LS-6 support.

CONVEYING SPEED—Other constant and variable speeds from 25 to 90 FPM. **NOTE: Capacity affected with speed change.**

SIDE MOUNTED DRIVE—Motor reducer unit mounted to side of conveyor. Specify inside or outside. Minimum elevation 11-1/16 in.

O-RING DRIVE CHAIN—With sealed in lubricant (Recommended for applications that do not permit regular lubrication).

GUARD RAILS—Continuous adjustable channel, fixed channel, type A or B angle. See Accessory section. **NOTE: If product comes in contact with guard rails, product flow will be affected.**

HEX SHAFTS—(LRC Only) 5/16 in. hex shafts in place of 1/4 in. dia. round shaft.

POLY-TIER SUPPORTS—36 in. to 120 in. support heights in 6 in. increments. Knee braces supplied.

CEILING HANGERS—5/8 in. dia. x 8 ft. long unplated rods fully threaded. Other lengths and galvanized rods available.

SLAVE DRIVEN—Standard drive may be omitted and curve slave driven from 138-ACC. (Specify by sketch, location of slave connection). Minimum elevation 10-1/2 in.

TAPERED TREAD ROLLERS—(LRC Only) 1-1/2 in. dia. tapered to 1 in. dia. x 18 ga. galvanized steel. 5/16 in. hex shaft (curve portion only). 1-1/2 in. nominal centers.

MOTORS—Energy efficient, single phase, other characteristics. 1/2 HP maximum.

ELECTRICAL CONTROLS—Non-reversing or reversible magnetic starters and push-button stations. AC variable frequency drive.