
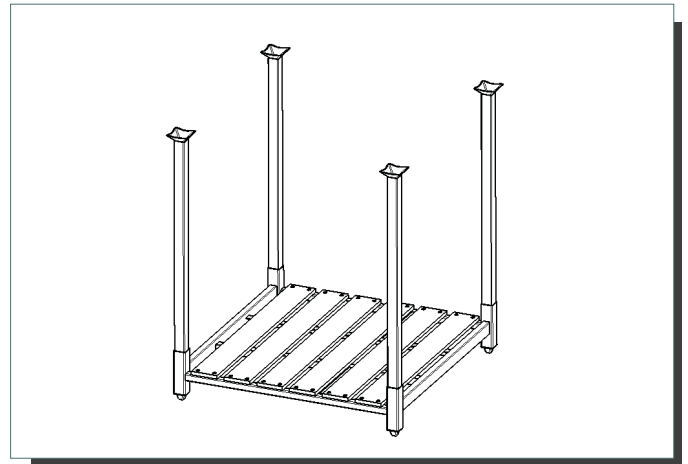


Stac-King[®] Portable Rack User's Manual

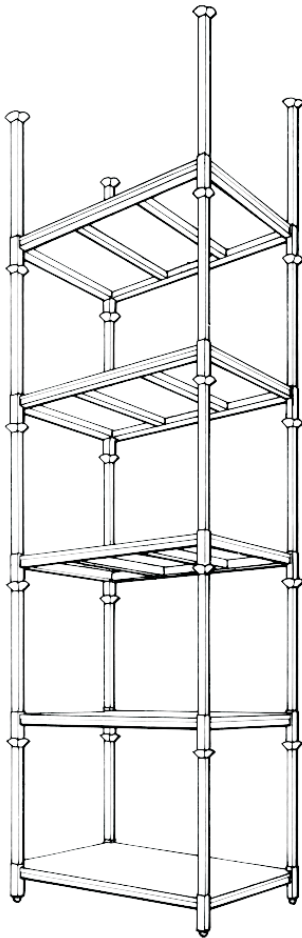

This manual contains:

- 1) Assembly and installation information**
- 2) Maintenance information**

Correct assembly, installation, use, and maintenance are critical to the safe operation of your portable rack system.

ALL PERSONNEL WHO COME IN CONTACT WITH THE PORTABLE RACK PRODUCT SHOULD READ THIS MANUAL CAREFULLY!

Operators of industrial lift trucks must be trained and certified per OSHA regulation 29 CFR 1910.178.

Keep this manual in a convenient location, for future reference, retraining, and orientation of new users of the product.

Guide to symbols in this manual:



figure 1

DANGER is indicated by a red exclamation point within a red triangle, as shown in figure 1. These symbols denote situations which could cause damage, injury, or death.



figure 2

CAUTION is indicated by a yellow exclamation point within a yellow triangle, as shown in figure 2. These symbols indicate situations which require an extra measure of your attention.

Thank you for your purchase of Stac-King portable racks!

Design considerations affecting safety and function:



Read these instructions before assembling or using your Stac-King portable racks. To obtain the maximum benefit from any portable rack system, and for the safety of those around the product, the system must be properly assembled and maintained. The information in this booklet will assist you in fulfilling your responsibility to provide a safe, properly maintained racking system.



Stac-King portable racks should be used only by trained personnel, experienced with proper handling and safety

What is a Stac-King portable rack?

Stac-King racks are steel bases, with or without optional decking materials, that allow handling of loads in a fashion similar to standard wood pallets. However, Stac-King racks have removable steel corner posts, which allow the racked loads to be stacked one on top of the other, without damaging the loads by the weight of the loads above in a stack. See figures 1 and 2.

Figure 1: Stac-King rack components

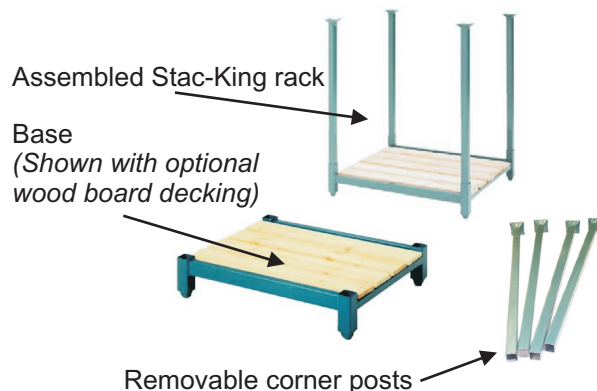



Figure 2: Stac-King racks in stacked configuration



Use the correct base construction for the length of the forks on your truck as compared to the size of the base.

If the forks exceed the short dimension of the rack and 2/3 of the long dimension, a "long fork" base will normally work. Otherwise a "short fork" base is the normal choice. See Figure 3

Figure 3: Stac-King base Vs Fork length

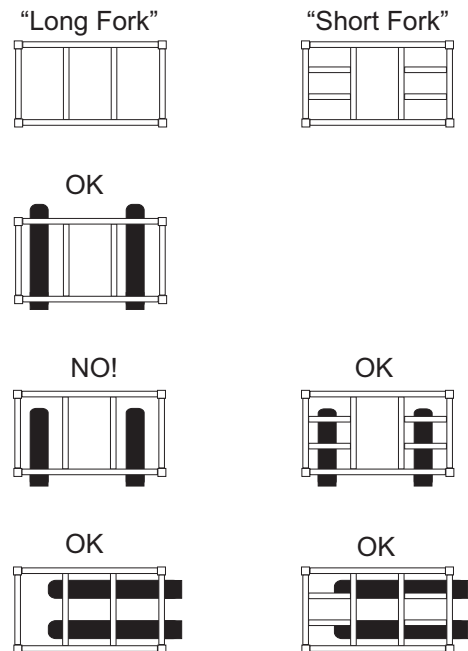

Match rack capacity with load weight.

DO NOT place more than 2000# of an evenly distributed load on each "Standard Duty" Stac-King rack. DO NOT place more than 4000# of an evenly distributed load on each "Heavy Duty" Stac-King rack. You do not need to add up all the weight in a stack of racks when determining capacity. The overhead weight is transferred to the floor by the corner posts (columns).


When using tall corner posts, "high corner sockets" or heavier size or gauge corner posts may be required. Contact Steel King engineering on any project where the corner posts must be taller than 42 inches above the deck surface.



Use standard designs only in conjunction with evenly distributed loads without side pressure on columns.

Concentrated loads and loads that subject the columns to side pressure can make the units difficult to stack, or cause them to bend, possibly leading to component failure. Contact Steel King Engineering for design advice on special circumstances. See Figure 4.

Figure 4: Applications requiring custom design

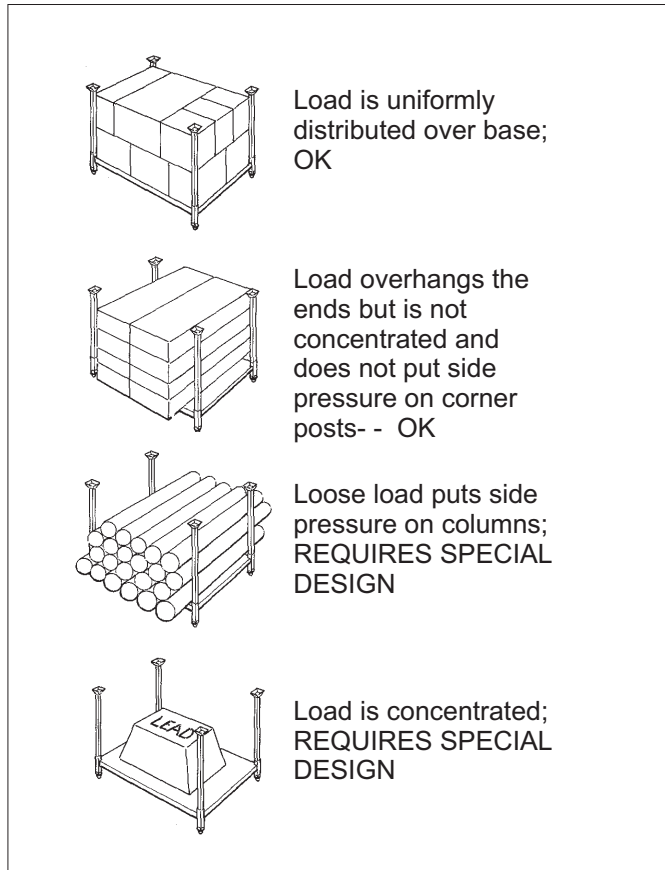

Cautions, Warnings, Guidelines for safe use:



Transport and handle racks one at a time; do not lift or move multiple racks.



Transport racks level or with slight tilt towards the fork lift truck backrest



Transport racks with rack bases above floor and all obstructions.

If rack legs strike objects, they could bend, making stacking difficult or reducing weight-carrying capacity.



Procedures for stacking portable racks.


- Make sure **all** column posts are completely seated in base sockets.
- Use lift truck to position racks. Make sure all four base plugs of top rack are properly positioned within the column targets of lower rack before Removing lift truck.



The overall height of a stacked group of racks must not exceed six times the shortest base dimension.

Stacking the racks any higher than six times the shortest base dimension can cause the stack of racks to be unstable and susceptible to tipping. Falling loads or racks can cause property damage, injury, or death. See figure 5.

Figure 5: Maximum stack height

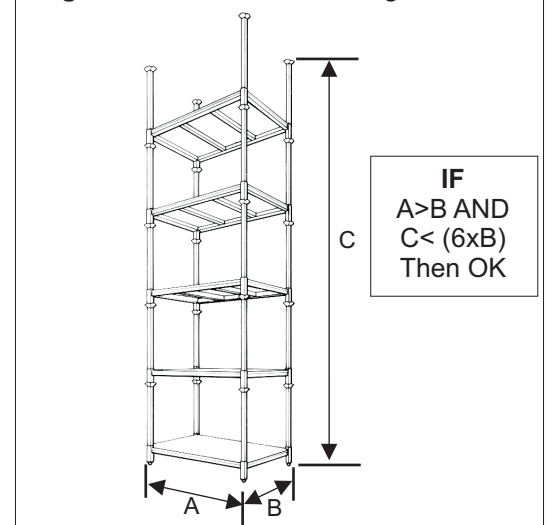

Stac-King portable racks should only be used on a concrete interior floor surface.

Asphalt surfaces can soften in heat and sunlight. Racks on soft surfaces including asphalt, sand, or gravel may tip over, and the falling racks or their contents may strike people in the adjacent area causing injury or death, or damage to property. High wind loads can cause the same result.



Never climb on the racks. Portable racks are not designed to be stepped on or climbed upon. A slip or fall may result in serious injury.

It is your responsibility to communicate this important warning to all who come into the proximity of your portable racks. This communication can include training and appropriate signage or labeling.



Load product onto or off of the Stac-King racks *only* at the floor level and only while unstacked.

Placing loads onto the racks while in a stacked configuration makes the racks more susceptible to tipping. Falling racks or product could cause damage, injury, or death.



Be cautious when intermingling new and existing parts.

Some parts manufactured by other companies are of such similar design that they might fit in a Stac-King rack. However, Steel King has no control over the quality of components designed and manufactured by other firms, therefore any and all warranties and guarantees are made void if non-Steel King parts are used in conjunction with Stac-King racks. Accept only genuine Steel King components.



Install good lighting in every traffic aisle.

Good lighting improves efficiency, reduces risk of accidents, and reduces accidental damage to the Stac-King rack system.

Proper maintenance and use:



Perform regularly scheduled inspections (at least annually) and maintenance of the Stac-King portable racks.

Check for:

- ☐ All hardware properly tightened
- ☐ No dents, kinks, or otherwise damaged components
- ☐ Worn out or damaged base plugs and column targets



Replace damaged or missing parts immediately.

In the event of damage, contact Steel King or your Steel King Distributor for replacement parts (damage reduces capacity, creating the potential for product failure and injury).




Train the operators, and maintain the equipment they use in conjunction with the Stac-King portable racks.

Stac-King racks last for many years when used and maintained properly. Stac-King racks can be damaged by careless use of or malfunctioning fork lift trucks.



Do not cut, weld, or in any other way modify any component of your Stac-King portable racks.

Such modifications may decrease the load carrying capability of the component, and the weakened component can jeopardize the integrity of the entire structure. A weakened structure decreases the load-carrying capacity, potentially leading to collapse and injury, death, or damage to property. Any modification of any component, except as performed or authorized in writing by Steel King Industries, Inc. engineering personnel, will make null and void any warranties and guarantees.




Be certain that fork truck operator is protected from overhead loads falling and a crushing injury if the fork truck is allowed to back under a rack section and pin him. If operators would be exposed to such dangers, contact the manufacturer and/or reseller of the fork lift equipment, and demand that protective devices (such as a protective rear post on stand up type trucks) be immediately installed on the equipment to protect the operator.



Establish good housekeeping practices.

Keep aisles clear of litter or obstructions, do not use traffic aisles for storage. Keep aisle surfaces clean and free of ice and condensation, so handling equipment travel is not affected.



Do you have any questions about your Stac-King Portable Rack, it's assembly, operation, or maintenance?

We would be pleased to assist you. Contact Steel King or your Steel King Distributor with any questions or free additional copies of this manual.

Steel King Industries, Inc.
2700 Chamber Street
Stevens Point, WI 54481

phone (800) 826-0203
 fax (715) 341-8792
 info@steelking.com

Form SKUM0209 copyright 2009 Steel King Industries, Inc.