
## **FORK EXTENSIONS - FE-4-63-R**

APPROX WEIGHT: 74.39 lbs.

\*\*\* ANY ADDITIONS. DELETIONS. OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

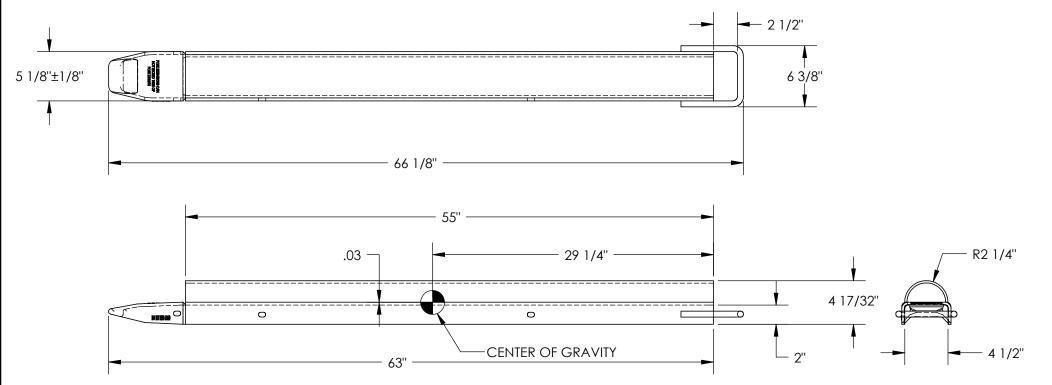

## STANDARD FEATURES

CENTER RATING.

ORIGINAL FORK LENGTH.

MODEL NUMBER IS FE-4-63-R FORK EXTENSION WIDTH: 5 1/8"±1/8" OVERALL WIDTH W/ LOOP: 6 3/8" USABLE WIDTH: 4 1/2" OVERALL LENGTH: 66 1/8" NONE USABLE LENGTH: 55" / 63" FITS 4" WIDE x 2" MAX. THICKNESS FORK SOLID STEEL CONSTRUCTION TOUGH BAKED IN POWDER COATED YELLOW FINISH APPROX. WEIGHT / LOST LOAD = 74.39 LBS. EACH MINIMUM FFFECTIVE THICKNESS = LESS THAN 1" CAPACITY = 4,000 # PER PAIR, EVENLY DISTRIBUTED FORK EXTENSIONS DO NOT CHANGE THE LOAD CENTER OF EXISTING FORK TRUCK. NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES. DO NOT USE THESE FORK EXTENSIONS IF LOAD WILL

EXCEED FORK TRUCK MANUFACTURER'S LOAD

FORK EXTENSIONS MUST NOT EXCEED 150%

## SPECIAL FEATURES

REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO Ρ Ρ R 0 V Α Signed: Printed Name:

## DIMENSION TOLERANCE ± 1/4"

CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE [ ] As drawn [ ] As marked Date:

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING DISTRIBUTOR'S NAME:

Χ

VESTIL MANUFACTURING DATE: 5/5/10

W.O.# SALES: X

FNG. FAB.

SALES

POWER

FOR INTERNAL USE ONLY

PROJECT SIGN OFF

REFERENCE: X QUOTED LEAD TIME: X QUOTE #

SCALE: 1:10 FILE NAME: 08-007-222